


EOS-97 Double Glazed

PRODUCT DESCRIPTION

The EOS-97 is our premium solution. This robust and highly insulated rooflight is a popular option where environmental impact is a high priority.

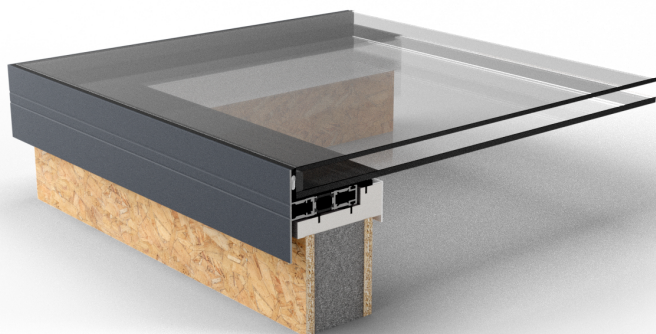

MATERIALS

The rooflight is constructed from glass and aluminium. A 97mm insulated upstand is included as standard, upstands range in height from 150mm to 450mm depending on site requirements.

GLASS TYPE

EOS-97 rooflights are supplied with double glazed low 'e' coated units with argon filled cavity.

Our standard glass specification is ;

- 32mm double glazed unit.
- 6mm Heat Soak Tested toughened outer pane,
- 16mm argon filled cavity
- 8.8 mm clear laminated super Low 'E' inner pane.

Other glass specifications are available on request.

U VALUES

U-value for the unit is as low as 0.97 W/m²K.*

U-value for the glass centre pane as low as 1.0 W/m²K.*

DIMENSIONS, POSSIBILITIES & LIMITATIONS

To avoid water pooling our upstands are supplied with either a 5 degree slope. In instance where the roof has sufficient fall we can supply the upstand with no fall.

WARRANTY

EOS97 rooflights come with a 10 year warranty and conform to the most up-to-date regulations. A copy of the guarantee and be provided on request.



About EOS Rooflights

EOS Rooflights was set up with the aim of providing high performance roof glazing direct to market.

Our extensive product range includes Fixed, Opening, Walk-On, Modular, Lanterns and Pitched rooflights.

T: 0208 462 3557 E: sales@eosrooflights.co.uk
www.eosrooflights.co.uk