
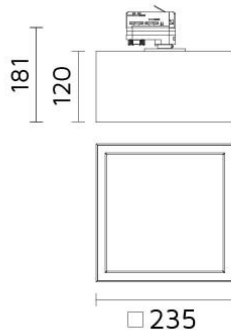


## DomoLED

## 6348-K30

DomoLED Square

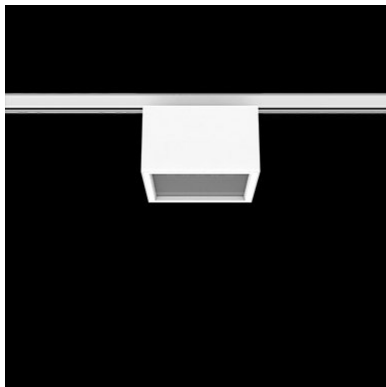

### Square Lensed Track Mounted Fixed Downlight with LED

- Front regressed trim of die cast aluminium with housing made in die formed coated steel.
- Diffuser made of satin acrylic.
- Safety cable included.
- Passive cooling LED source 3000K CRI>80 of 4050 nominal lumen.
- System power 35W; System efficacy 76,7 lm/W; 2685 delivered lumen.
- Supplied with non-dimming integral driver 220-240V 50/60Hz.
- Dimming options available on request.

LED source package is available on request with a preferred LED colour rendering CRI>90 and/or other colour temperature K options.

### Specifications

Designed and manufactured to comply with European standard EN 60598.



Product code	Finish	Color temperature	CRI	Beam angle	Dim. options	Code
6348	10 - Black	<b>K30-3000K</b>	>80		Phase	2
	11 - White				LaserDIM	5
	75 - Grey					

Ordering code example : 6348 - \_\_ K30 \_\_