


Mondo

6326-K40D38

Mondo

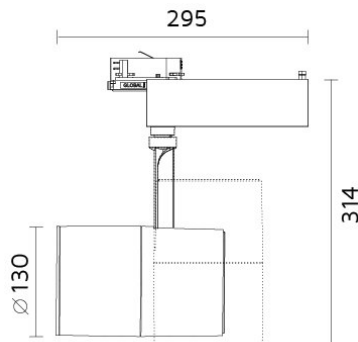

Track Mounted Adjustable Spotlight with LED

- Light head: 350° rotation and up to 85° aiming angle.
 - Made from die cast aluminium, light head designed with integrated heat-sink.
 - Optical grade metalized polycarbonate reflector.
 - 3 circuit universal track adaptor.
 - Passive cooling COB LED source 4000K CRI>80 of 4280 nominal lumen.
 - System power 40W; System efficacy 73,9 lm/W; 3074 delivered lumen.
 - Optic: reflector beam angle: 38°.
 - 220-240V 50/60Hz integral control gear is inclusive.
 - Accepts up to 3 flat optical accessories.
 - Versions for G12 CDM-T or PAR30 CDM-R or GX8,5 CDM-R111 MH or G53 AR111 Halogen or PAR30 E27 LED retrofit lamps are available.
- LED source package is available on request with a preferred LED colour rendering CRI>90 and/or other colour temperature K options.

Accessories

(To be ordered separately)

Item	Code
Coloured Filters	2340
Honeycomb Louvre	2320
Anti-Glare Tube	2347
Directional Flaps	2319
Wallwasher Visor	2385

Specifications

Designed and manufactured to comply with European standard EN 60598.



Product code	Finish	Color temperature	CRI	Beam angle	Dim. options	Code
6326	10 - Black	K40-4000K	>80	D38-38°	Phase	2
	11 - White				LaserDIM	5
	29 - Grey					

Ordering code example : 6326 - __ K40 D38 __