


0 Series Surface Mounted  
Rim Strike



*In or Out...we make it Easy!®*

Installation  
Tool Included!

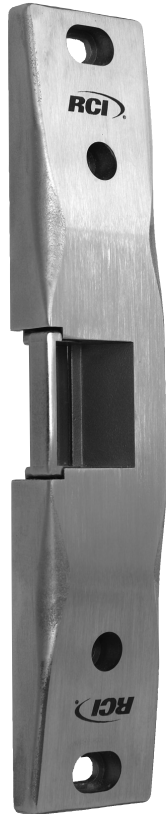


**Dimensions**  
1-3/4" x 9" x 3/4"  
(44.5 x 228.6 x 19.1mm)



RCI 0162 Compatibility Chart	
MANUFACTURER	MODEL NO.
Arrow	S1250, S1800, S3800, S4803
Corbin/Russwin	ED 4000, ED 5000, ED 6000, ED7000
Detex	V40 Series
Dorma	8000 and 9000 Series
Dor-O-Matic (Falcon)	1590, 1790
Jackson	2095
Monarch	18-R
Precision	Apex 2000
Sargent	8800, 8888E
Von Duprin	22E0, 98, 99, XP98, XP99
Yale	YME 2100 Series



Lock down holes for  
added stability

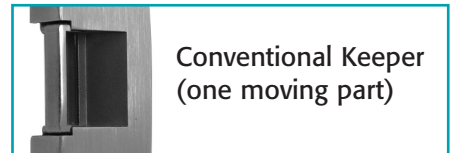

Conventional Keeper  
(one moving part)

## Features & Benefits


- No frame cutting required – Surface Mounted
- Higher grade stainless steel ensures superior keeper strength
- Factory tested to over 4 million cycles of operation
- UL Listed to 1500 lbs of static strength
- Compatible with most major exit devices (see above chart)
- Accommodates exit devices with latch projections from 1/2" to 3/4" (12.7mm - 19.1mm)
- Ensure proper latch alignment with horizontal adjustment up to 1/4" (6.4mm) to compensate for door misalignments
- Allen head cap screws for added support and tamper resistance
- Field selectable voltage input – 12 or 24VDC and 12 to 24VAC (even 11 to 16VAC)
- Horizontal solenoid prevents manipulation from vibration
- Modular plug-in wire connectors
- Selectively brushed stainless steel finish
- Non-handed
- Mounting spacer included to provide enhanced latch engagement
- 5-year limited warranty

US Patent 7,722,097

## Accessories

**0162DDH** – Double door housing

**0162MSK** – Mounting Spacer Kit 1/16" (1.5mm)  
(Additional spacer included)

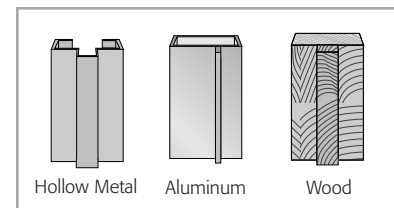


Hollow Metal

Aluminum

Wood

Door  
Frame  
Type

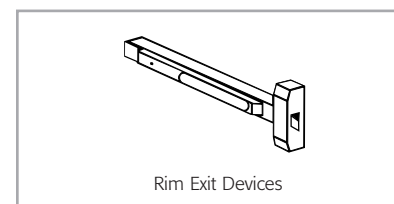

Rim Exit Devices

Door  
Lock  
Type