


Geberit washbasin tap Brenta, deck-mounted, mains operation, for concealed function box

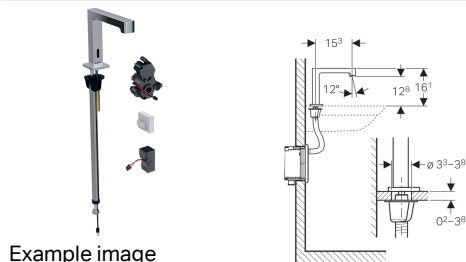

Application purposes

- For extracting tap water
- For public and semipublic areas
- For installation in washbasins or washtops
- For installation in Geberit elements for washbasins, deck-mounted tap with concealed function box
- For installation in installation sets for Geberit washbasin taps, deck-mounted, with concealed function box
- For connecting cold and hot water (only for models with mixer)
- For connecting cold or mixed water (only for models without mixer)
- For use with stainless steel bowls
- Models with mixer not suitable for continuous flow heater

Characteristics

- Automatic flush actuation
- Infrared user detection
- Self-adjusting IR sensor
- Vandal-resistant
- Volume flow control via tap aerator
- Temperature presetting via mixer (only for models with mixer)
- Not possible to set just hot water or just cold water (only for models with mixer)
- Power supply via power supply unit
- Economy mode can be set
- Water saving due to quick-response two-beam scanning technology
- Functions can be set and queried with the Geberit Service Handy
- Water saver program can be set
- Interval flush program can be set
- Continuous flush can be set individually
- Flush actuation can be deactivated via Geberit Clean Handy
- Various functions can be set manually
- With integrated check valve
- Functional unit with built-in basket filters

Technical data

Protection degree	IPX4
Nominal voltage	110-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.5 V DC
Power consumption	0.1 W
Operating pressure	0.5-10 bar
Differentiated pressure CW/WW	≤ 1.5 bar
Maximum test pressure, water	16 bar
Maximum test pressure, air / inert gas	3 bar
Ambient temperature	1-40 °C
Storage temperature	-20 - +70 °C
Maximum operating temperature, water	60 °C
Maximum operating temperature, water, short-term	90 °C
Flow rate at 3 bar	5 l/min
Calculated flow rate	0.07 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Interval flush, adjustment range	1-168 h
Interval flush, factory setting	24 h
Interval flush time, adjustment range	5-200 s
Interval flush time, factory setting	5 s
Material	Brass chrome-plated / plastic

Scope of delivery

- Washbasin tap with IR sensor and connection hose
- Control electronics
- Functional unit
- Power supply unit
- Tap aerator key
- Fastening material

To order additionally

- Geberit frame for washbasin or installation set for Geberit washbasin tap
- Cover plate

Art. no.	Colour / surface	Mixer
116.191.21.1	gloss chrome-plated	without mixer
116.192.21.1	gloss chrome-plated	with mixer

Accessories

- Geberit Service Handy
- Geberit Clean Handy