

5

COLOURS

3

SIZES


1

FINISHES

www.grestec.co.uk

Divine

ceramic wall

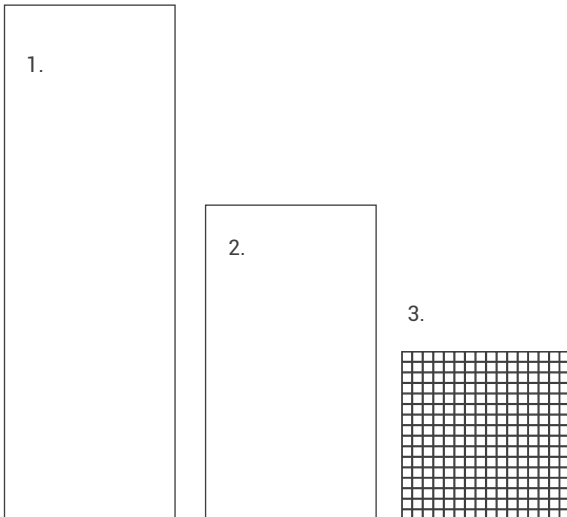

	SIZE	THICKNESS	FINISHES
1.	305x915	10MM	NAT
2.	305x560	10MM	NAT

MOSAICS	
(Mosaics supplied on 300x300 mesh-back sheets)	
7.	Standard

PRINT COLOURS MAY VARY, PLEASE REQUEST A SAMPLE



7

COLOURS

2

SIZES


1

FINISHES

www.grestec.co.uk

Divine

decor wall



	SIZE	THICKNESS	FINISHES
1.	305x915	10MM	NAT
2.	305x560	10MM	NAT

PRINT COLOURS MAY VARY, PLEASE REQUEST A SAMPLE



12

COLOURS

3

SIZES

1

FINISHES

www.grestec.co.uk

Divine

technical specification & maintenance



Technical Characteristic		Standard	Average Values
	Water absorption	ISO 10545-3	Conforms
	Sizes	ISO 10545-2	Conforms
	Bending strength	ISO 10545-4	Conforms
	Coefficient of linear thermal expansion	ISO 10545-8	Conforms
	Crazing resistance	ISO 10545-11	Resistant
	Resistance to chemical products	ISO 10545-13	GA
	Stain resistance	ISO 10545-14	Cleanable

INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Equipment	Cloth
Procedure	<ul style="list-style-type: none"> • Clean off cement stains from grouting and other building work, which once hardened, will not be removed. • Polish wall tiling with a dry cloth when joints are hard

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. The routine maintenance must be carried out regularly.

Product	Filacleaner (1:5 diluted in warm water)
Equipment	Cloth or mop
Procedure	<ul style="list-style-type: none"> • Remove dust with a dry cloth • Dilute Filacleaner in warm water • Regularly soak cloth wet with the solution and wring out well before covering tiles.

