

# Drift Stone

- Stone effect
- Suitable for both floor & wall applications
- Frost-proof



grestec.co.uk / 0345 130 2241



BMA32120



BMA32119




BMA32121




BMA32124



BMA32123




BMA32122



BMA32125

	SIZES (MM)	THICKNESS	FINISHES
1	450x900	10MM	NAT (R10)
2	225x900	10MM	NAT (R10)
3	300x600	10MM	NAT (R10)
4	50x50 MOSAIC ON 300x300 MESH	10MM	NAT (R10)
5	300x600 STEP TREAD	-	-
6	90x325 GRADONE	-	-
7	100x600/75x900 SKIRTING	-	-

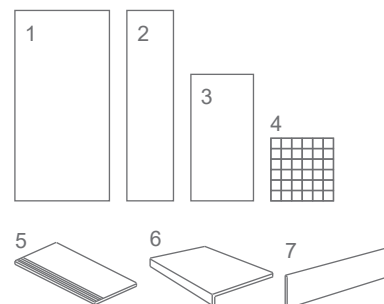

REQUEST SAMPLES, PRINT COLOURS MAY VARY.

FIND US ON:





DRIFT STONE / BMA32119



DRIFT STONE / BMA32120, BMA32121



DRIFT STONE / BMA32122



DRIFT STONE / BMA32123



DRIFT STONE / BMA32124, BMA32125



DRIFT STONE / BMA32124

## Technical specification

Technical Characteristic	Standard	Average Values
Water absorption	ISO 10545-3	0.1%
Sizes	ISO 10545-2	Conforms
Modulus of rupture	ISO 10545-4	Conforms
Breaking strength	ISO 10545-4	Conforms
Deep abrasion resistance	ISO 10545-6	150mm3
Coefficient of linear thermal expansion	ISO 10545-8	6.2 MK-1
Resistance to thermal shock	ISO 10545-9	Resistant
Frost resistance	ISO 10545-12	Resistant
Resistance to chemical products	ISO 10545-13	Resistant
Resistance to staining	ISO 10545-14	Resistant
Colour resistance to light	DIN 51094	No alteration after testing
Slip resistance (Shod)	DIN 51130	R10

## Cleaning and maintenance advice

### Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m <sup>2</sup> )
Equipment	Single-disc professional polisher, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> <li>• After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor.</li> <li>• Then scour with single-disc professional polisher.</li> <li>• Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.</li> </ul>

### Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> <li>• Dilute Filacleaner in warm water</li> <li>• Wipe a cloth wet with the solution over the floor</li> <li>• Rinse the floor in case of concentrated solutions of Filacleaner</li> </ul>

### Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m <sup>2</sup> (when diluted 1:5)
Equipment	Single-disc professional polisher
Procedure	<ul style="list-style-type: none"> <li>• Dilute Fila PS/87 in 1:5 in water</li> <li>• Apply to the floor previously soaked with water and leave for a few minutes</li> <li>• Scrub with a single disc professional polisher</li> <li>• Mop up residue with a liquid vacuum cleaner or cloth</li> </ul>

FIND US ON:

