

23

COLOURS

7

SIZES


1

FINISHES

www.grestec.co.uk

Legni

porcelain stone

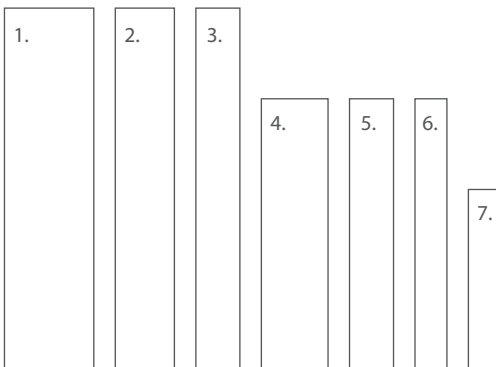

| | SIZE (MM) | THICKNESS | FINISHES |
|----|-----------|-----------|----------|
| 1. | 300x1200 | 10 | NAT |
| 2. | 200x1200 | 10 | NAT |
| 3. | 150x1200 | 10 | NAT |
| 4. | 225x900 | 10 | NAT |
| 5. | 150x900 | 10 | NAT |
| 6. | 110x900 | 10 | NAT |
| 7. | 100x600 | 10 | NAT |



23

COLOURS

7

SIZES

1

FINISHES

www.grestec.co.uk

Legni

sizes



| | | Slip rating | 300x1200 | 200x1200 | 150x1200 | 225x900 | 150x900 | 110x900 | 100x600 |
|---------|-------|-------------|----------|----------|----------|---------|---------|---------|---------|
| EAL6592 | R10/C | | | | | • | • | • | |
| EAL6547 | R10/B | | • | • | • | | | | • |
| EAL6596 | R10/A | | • | • | • | | | | • |
| EAL6544 | R10/B | | • | • | • | | | | • |
| EAL7484 | R10/B | | • | • | • | | | | • |
| EAL6572 | R10/C | | | | | • | • | • | |
| EAL6548 | R10/A | | • | • | • | | | | • |
| EAL6593 | R10/B | | | | | • | • | • | |
| EAL7483 | R10/A | | • | • | • | | | | • |
| EAL7482 | R11/B | | • | • | • | | | | • |
| EAL6546 | R10/B | | • | • | • | | | | • |
| EAL6598 | R10/A | | • | • | • | | | | • |
| EAL6573 | R9/A | | | | | • | • | • | |
| EAL6600 | R10/A | | • | • | • | | | | • |
| EAL6574 | R10/A | | • | • | • | | | | • |
| | R11/B | | | | | • | • | • | |
| EAL6549 | R11/B | | • | • | • | | | | • |
| EAL6597 | R10/A | | • | • | • | | | | • |
| EAL6582 | R10/B | | | | | • | • | • | |
| EAL6545 | R10/B | | • | • | • | | | | • |
| EAL6583 | R10/A | | | | | • | • | • | |
| EAL6581 | R11/A | | | | | • | • | • | |
| EAL6594 | R10/A | | | | | • | • | • | |
| EAL6571 | R11/C | | | | | • | • | • | |



23

COLOURS

7

SIZES

1











FINISHES

www.grestec.co.uk

Legni

technical specification



| Technical Characteristic | Standard | Average Values |
|---|--------------|--|
|  Water absorption | ISO 10545-3 | 0.02%-0.04% |
|  Sizes | ISO 10545-2 | Conforms: Length and width Conforms: Thickness Conforms: Linearity Conforms: Wedging Conforms: Warpage |
| | ISO 10545-2 | Conforms |
|  Bending strength | ISO 10545-4 | 55N/mm ² |
|  Deep abrasion resistance | ISO 10545-6 | 130 mm ³ |
|  Coefficient of linear thermal expansion | ISO 10545-8 | 6,2x10 ⁻⁶ °C ⁻¹ |
|  Resistance to thermal shock | ISO 10545-9 | Resistant |
|  Frost resistance | ISO 10545-12 | Frost proof |
|  Resistance to chemical products | ISO 10545-13 | Conforms |
|  Colour resistant to light | DIN 51094 | No change in brightness or colour |
| Stain resistance | ISO 10545-14 | Class 5 |
|  Slip resistance (shod) | DIN 51130 | See individual colours for details |
| | DIN 51097 | See individual colours for details |



23

COLOURS

7

SIZES

1

FINISHES

www.grestec.co.uk

Legni

maintenance



INITIAL WASHING

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

| | |
|-----------|---|
| Product | Deterdek (1:5 diluted in water) |
| Coverage | Deterdek (5 l per 100m ²) |
| Equipment | Single-disc professional polisher, liquid vacuum cleaner and cloth |
| Procedure | <ul style="list-style-type: none"> • After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor. • Then scour with single-disc professional polisher. • Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth. |

ROUTINE MAINTENANCE

The aim of the routine maintenance is to remove dirt and scuff marks. The routine maintenance must be carried out regularly.

| | |
|-----------|---|
| Product | Filacleaner (Diluted in warm water) |
| Equipment | Cloth or mop |
| Procedure | <ul style="list-style-type: none"> • Dilute Filacleaner in warm water • Wipe a cloth wet with the solution over the floor • Rinse the floor in case of concentrated solutions of Filacleaner <p>(For large areas the use of a cleaning machine is recommended)</p> |

SPECIAL MAINTENANCE

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

| | |
|-----------|--|
| Product | Fila PS/87 (1:5 diluted in water) |
| Coverage | 5 l per 100m ² (when diluted 1:5) |
| Equipment | Single-disc professional polisher |
| Procedure | <ul style="list-style-type: none"> • Dilute Fila PS/87 in 1:5 in water • Apply to the floor previously soaked with water and leave for a few minutes • Scrub with a single disc professional polisher • Mop up residue with a liquid vacuum cleaner or cloth |