

Terracrete

- Stone effect
- Suitable for both floor & wall applications
- High shade variation



grestec.co.uk / 0345 130 2241



BME32133



BME32134



BME32135




BME32136



BME32137

	SIZES (MM)	THICKNESS	FINISHES
1	450x900	10MM	NAT (R10)
2	600x600	10MM	NAT (R10)
3	300x600	10MM	NAT (R10)
4	300x300	10MM	NAT (R10)
5	50x50 MOSAIC ON 300x300 MESH	10MM	NAT (R10)
6	75x300	10MM	NAT (R10)
7	75x150	10MM	NAT (R10)
8	330x600 GRADONE	-	-
9	70x600/75x900 SKIRTING	-	-

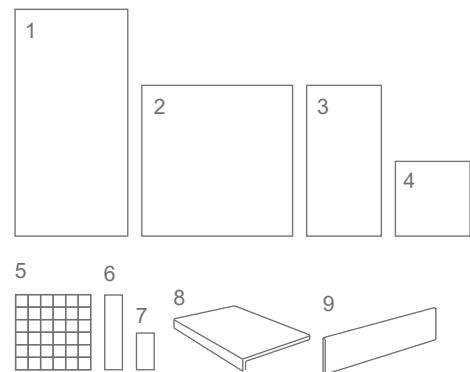

REQUEST SAMPLES, PRINT COLOURS MAY VARY

FIND US ON:





Technical specification

Technical Characteristic	Standard	Average Values
Water absorption	ISO 10545-3	0.1%
Sizes	ISO 10545-2	Conforms
Bending strength	ISO 10545-4	Conforms
Breaking strength	ISO 10545-4	Conforms
Deep abrasion resistance	ISO 10545-6	<150mm ³
Thermal expansion coefficient	ISO 10545-8	6.2 MK-1
Resistance to thermal shock	ISO 10545-9	Resistant
Frost resistance	SO 10545-12	Resistant
Resistance to chemical products	ISO 10545-13	Resistant
Resistance to staining	ISO 10545-14	Resistant
Slip resistance (Shod)	DIN 51130	Natural - R10
Colour resistant to light	DIN 51094	No alteration after testing

Cleaning and maintenance advice

Initial washing

The initial washing is fundamental for good treatment results. The initial washing is aimed at removing any laying residues and building grime.

Product	Deterdek (1:5 diluted in water)
Coverage	Deterdek (5 l per 100m ²)
Equipment	Single-disc professional polisher, liquid vacuum cleaner and cloth
Procedure	<ul style="list-style-type: none"> • After the floor is swept and soaked with water, spread the diluted Deterdek onto the floor. • Then scour with single-disc professional polisher. • Vacuum the residue, rinse the floor well and then mop with a liquid vacuum cleaner or a cloth.

Routine maintenance

The aim of the routine maintenance is to remove dirt and scuff marks. Must be carried out regularly.

Product	Filacleaner (Diluted 1:50 in warm water)
Equipment	Cloth or mop (For large areas the use of a cleaning machine is recommended)
Procedure	<ul style="list-style-type: none"> • Dilute Filacleaner in warm water • Wipe a cloth wet with the solution over the floor • Rinse the floor in case of concentrated solutions of Filacleaner

Special maintenance

Special maintenance is carried out in case of very stubborn dirt, when the routine maintenance is not enough to restore the original look of the surface.

Product	Fila PS/87 (1:5 diluted in water)
Coverage	5 l per 100m ² (when diluted 1:5)
Equipment	Single-disc professional polisher
Procedure	<ul style="list-style-type: none"> • Dilute Fila PS/87 in 1:5 in water • Apply to the floor previously soaked with water and leave for a few minutes • Scrub with a single disc professional polisher • Mop up residue with a liquid vacuum cleaner or cloth