



Trapeze No.2

For suspending M&E services,
HVAC and signage





Trapeze No.2

Purpose-made single channel, ideal for multi-tiered installations. Brand new design to facilitate site installations.

- Ideal for fast suspension of cable containment, air conditioning cassettes, chilled beams, etc.
- Tapered design - accommodates all slots sizes
- Discreet - fits completely inside the channel
- Pre-fits onto channel to ease working at height
- Pin allows rapid adjustment
- Aesthetic design
- Load rated at 45 kg with a 5:1 safety factor
- Available as an accessory for multi-tiered installations
- Supplied as a ready-to-use kit

End fixing choices





Clip information

This clip pre-fits and holds the Trapeze onto the channel.







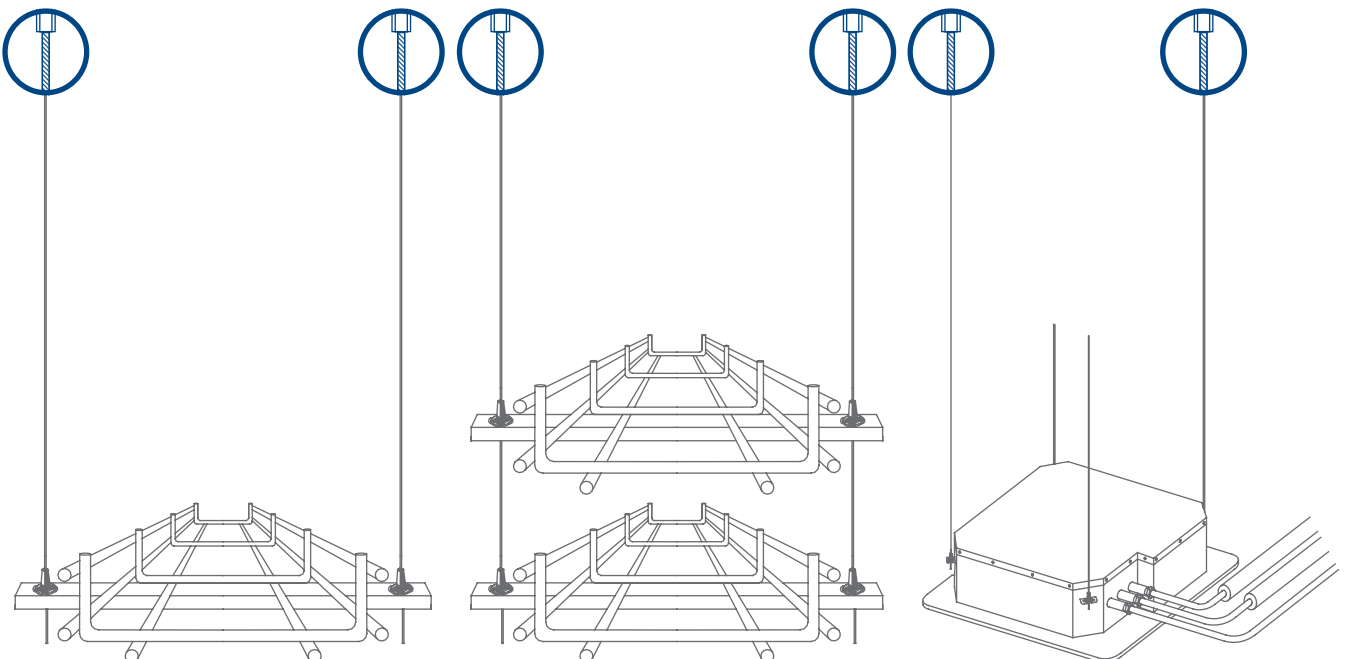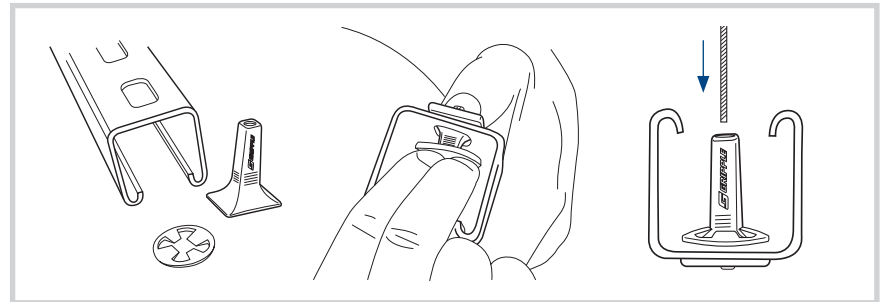


In preparation for working at height, simply clip onto the Trapeze unit.












Installation



Product codes

| End fixing | Size | Length (m) | No.2 (0 - 45 kg) |
|--|------|------------|------------------|
|  Loop | | 1 | TZ2-LG-1M |
| | | 2 | TZ2-LG-2M |
| | | 3 | TZ2-LG-3M |
| | | 4 | TZ2-LG-4M |
| | | 5 | TZ2-LG-5M |
| | | 10 | TZ2-LG-10M |
|  M6 Stud | | 1 | TZ2-S6G-1M |
| | | 2 | TZ2-S6G-2M |
| | | 3 | TZ2-S6G-3M |
| | | 4 | TZ2-S6G-4M |
| | | 5 | TZ2-S6G-5M |
| | | 10 | TZ2-S6G-10M |
|  M8 Stud | | 1 | TZ2-S8G-1M |
| | | 2 | TZ2-S8G-2M |
| | | 3 | TZ2-S8G-3M |
| | | 4 | TZ2-S8G-4M |
| | | 5 | TZ2-S8G-5M |
| | | 10 | TZ2-S8G-10M |
|  M10 Stud | | 1 | TZ2-S10G-1M |
| | | 2 | TZ2-S10G-2M |
| | | 3 | TZ2-S10G-3M |
| | | 4 | TZ2-S10G-4M |
| | | 5 | TZ2-S10G-5M |
| | | 10 | TZ2-S10G-10M |
|  Toggle | | 1 | TZ2-TG-1M |
| | | 2 | TZ2-TG-2M |
| | | 3 | TZ2-TG-3M |
| | | 4 | TZ2-TG-4M |
| | | 5 | TZ2-TG-5M |
| | | 10 | TZ2-TG-10M |
|  Snap hook | | 1 | TZ2-HG-1M |
| | | 2 | TZ2-HG-2M |
| | | 3 | TZ2-HG-3M |
| | | 4 | TZ2-HG-4M |
| | | 5 | TZ2-HG-5M |
| | | 10 | TZ2-HG-10M |
|  Eyelet | | 1 | TZ2-EY6G-1M |
| | | 2 | TZ2-EY6G-2M |
| | | 3 | TZ2-EY6G-3M |
| | | 4 | TZ2-EY6G-4M |
| | | 5 | TZ2-EY6G-5M |
| | | 10 | TZ2-EY6G-10M |
|  90° Eyelet | | 1 | TZ2-EY906G-1M |
| | | 2 | TZ2-EY906G-2M |
| | | 3 | TZ2-EY906G-3M |
| | | 4 | TZ2-EY906G-4M |
| | | 5 | TZ2-EY906G-5M |
| | | 10 | TZ2-EY906G-10M |
|  Cladding hook | | 1 | TZ2-CHG-1M |
| | | 2 | TZ2-CHG-2M |
| | | 3 | TZ2-CHG-3M |
| | | 4 | TZ2-CHG-4M |
| | | 5 | TZ2-CHG-5M |
| | | 10 | TZ2-CHG-10M |

| End fixing | Size | Length (m) | No.2 (0 - 45 kg) |
|--|------|------------|------------------|
|  M6 Barrel | | 1 | TZ2-B6G-1M |
| | | 2 | TZ2-B6G-2M |
| | | 3 | TZ2-B6G-3M |
| | | 4 | TZ2-B6G-4M |
| | | 5 | TZ2-B6G-5M |
| | | 10 | TZ2-B6G-10M |
|  M8 Barrel | | 1 | TZ2-B8G-1M |
| | | 2 | TZ2-B8G-2M |
| | | 3 | TZ2-B8G-3M |
| | | 4 | TZ2-B8G-4M |
| | | 5 | TZ2-B8G-5M |
| | | 10 | TZ2-B8G-10M |
|  25 mm Wedge | | 1 | TZ2-DW258G-1M |
| | | 2 | TZ2-DW258G-2M |
| | | 3 | TZ2-DW258G-3M |
| | | 4 | TZ2-DW258G-4M |
| | | 5 | TZ2-DW258G-5M |
| | | 10 | TZ2-DW258G-10M |
|  Alphawedge | | 1 | TZ2-DA8G-1M |
| | | 2 | TZ2-DA8G-2M |
| | | 3 | TZ2-DA8G-3M |
| | | 4 | TZ2-DA8G-4M |
| | | 5 | TZ2-DA8G-5M |
| | | 10 | TZ2-DA8G-10M |
|  Multiwedge 2 | | 1 | TZ2-DM28G-1M |
| | | 2 | TZ2-DM28G-2M |
| | | 3 | TZ2-DM28G-3M |
| | | 4 | TZ2-DM28G-4M |
| | | 5 | TZ2-DM28G-5M |
| | | 10 | TZ2-DM28G-10M |
|  TR60 Wedge | | 1 | TZ2-DTR8G-1M |
| | | 2 | TZ2-DTR8G-2M |
| | | 3 | TZ2-DTR8G-3M |
| | | 4 | TZ2-DTR8G-4M |
| | | 5 | TZ2-DTR8G-5M |
| | | 10 | TZ2-DTR8G-10M |
|  MF Wedge | | 1 | TZ2-DMF8G-1M |
| | | 2 | TZ2-DMF8G-2M |
| | | 3 | TZ2-DMF8G-3M |
| | | 4 | TZ2-DMF8G-4M |
| | | 5 | TZ2-DMF8G-5M |
| | | 10 | TZ2-DMF8G-10M |
|  6 mm C-Clip | | 1 | TZ2-CC6-1M |
| | | 2 | TZ2-CC6-2M |
| | | 3 | TZ2-CC6-3M |
| | | 4 | TZ2-CC6-4M |
| | | 5 | TZ2-CC6-5M |
| | | 10 | TZ2-CC6-10M |
|  Channel nut | | 1 | TZ2-CN8G-1M |
| | | 2 | TZ2-CN8G-2M |
| | | 3 | TZ2-CN8G-3M |
| | | 4 | TZ2-CN8G-4M |
| | | 5 | TZ2-CN8G-5M |
| | | 10 | TZ2-CN8G-10M |

Trapeze has a 5:1 safety factor. Other lengths are available on request.



Cable basket



Cable tray



Higher load rating needed?

Why not try the Trapeze No.3, with a maximum working load limit of 90 kg @ 3:1 SF. Contact us for more information.

www.gripple.com

info@gripple.com



Gripple Ltd (Headquarters)

The Old West Gun Works
Savile Street East
Sheffield S4 7UQ
UK

UK Sales: 0800 018 4264
Fax: +44 (0)114 275 1155
Email: info@gripple.com



Gripple Europe SARL

1, rue du commerce
BP 37
67211 Obernai Cedex
France

T | +33 (0)3 88 95 44 95
F | +33 (0)3 88 95 08 78
E | frinfo@gripple.com

Gripple GmbH

Pariser Ring 1
76532 Baden-Baden
Deutschland

T | +49 (0)700 95 44 95 11
F | +49 (0)700 95 08 78 11
E | deinfo@gripple.com

Gripple Inc

1611 Emily Lane
Aurora
IL 60502
USA

T | +1 866 474 7753
F | +1 800 654 0689
E | usinfo@gripple.com

Gripple s.r.l

Via Marconi, 32
24068 Seriate BG
Italia

T | +39 (0)35 300 246
F | +39 (0)35 424 0036
E | itinfo@gripple.com

Gripple Benelux

1, rue du commerce
BP37
67211 Obernai Cedex
Frankrijk

T | +31 (0)70 363 34 30
F | +31 (0)70 362 18 44
E | nlinfo@gripple.com

Gripple Industrial Ibérica, S.L.

Ctra. Logroño km 7, 3 Pol. Europa 1
50011 Zaragoza
España

T | +34 (0)97 678 32 67
F | +34 (0)97 678 32 68
E | esinfo@gripple.com

Gripple Portugal

Estrada Nacional 4
Km 46,5 Pontal
2985-201 Pegões
Portugal

T | +351 265 898 870
F | +351 265 898 879
E | ptinfo@gripple.com

Gripple Australia / NZ

Polyplas Pty Ltd, 30 Sydney Rd
Bayswater, Victoria 3153
Australia

T | +61 (0)3 9720 0449
F | +61 (0)3 9720 0469
E | auinfo@gripple.com

© 2011 Gripple

Gripple is a registered trademark of Gripple Limited,

Company registered in England No. 1772901, VAT Reg No. GB 600 1951 88

BROC-IND-TZ2-ENG