




	CRI 80	25W	31W	46W
3 Warm White LED (3000K)				
Lumen Output	4086 lm	5120 lm	6930 lm	
LOR	0.86	0.86	0.86	
CRI	80	80	80	
Total Power	26.3W	35.5W	50.8W	
Power Factor	0.98	0.95	0.95	
Running Current	0.12A	0.16A	0.23A	
Inrush Current	32.0A (240us)	23.3A (168us)	33.0A (250us)	
Efficacy	133 lm/W	124 lm/W	117 lm/W	
Emergency Output (BLF)	449 lm (11%)	409 lm (8%)	415 lm (6%)	
4 Neutral White LED (4000K)				
Lumen Output	4268 lm	5346 lm	7240 lm	
LOR	0.86	0.86	0.86	
CRI	80	80	80	
Total Power	26.3W	35.5W	50.8W	
Power Factor	0.98	0.95	0.95	
Running Current	0.12A	0.16A	0.23A	
Inrush Current	32.0A (240us)	23.3A (168us)	33.0A (250us)	
Efficacy	139 lm/W	129 lm/W	122 lm/W	
Emergency Output (BLF)	469 lm (11%)	427 lm (8%)	434 lm (6%)	

- Zhaga Book 7 LED with an outstanding LOR of 0.86
- Available in a choice of lumen outputs, delivering up to 7240 lumens
- Efficacies up to 139 lm/W
- Comprehensive choice of wattages and Control Gear types
- Life expectancy 51,000 hours (L80 B10)
- Extruded 'wipe clean' clear polycarbonate refractor with internal linear microprisms
- Exceptional wide light distribution for general lighting applications
- Colour stability within 3 MacAdams
- Designed to accept fixings for lighting trunking and uni-strut
- Complementary Pendant version available

Ariga Surface

LED	25W	31W	46W
LED	SM395	SM395	SM395
LED	25	31	46
	+	+	+
	373	373	373

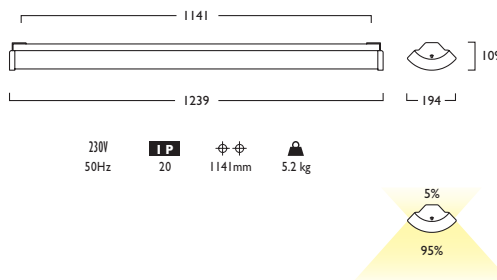

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

- 3** Warm (3000K) **4** Neutral (4000K)
- 1** White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)


- 258** Tamperproof End Caps
- 259** Tamperproof Screwdriver (T20)

Options



258 Tamperproof End Caps

Photometrics

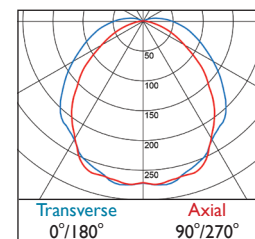

373 ULOR: 0.04 DLOR: 0.82