




3	Warm White LED (3000K)	CRI 80 20W
	Lumen Output	2660 lm
	LOR	0.71
	CRI	80
	Total Power	23.0W
	Power Factor	0.90
	Running Current	0.11 A
	Inrush Current	8.0A
	Efficacy	82 lm/W
	Emergency Output (BLF)	80 (3%)

4	Neutral White LED (4000K)	CRI 80 20W
	Lumen Output	2800 lm
	LOR	0.71
	CRI	80
	Total Power	23.0W
	Power Factor	0.90
	Running Current	0.11 A
	Inrush Current	8.0A
	Efficacy	86 lm/W
	Emergency Output (BLF)	80 (3%)

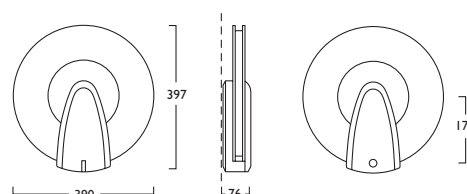


230V 50Hz IP 20 50mm 4.2 kg

Ascension

LED WL944 LED 20 540

- Distinctive, slim architectural design
- High quality etched glass halo and precision die cast aluminium construction
- Efficacies up to 85 lm/W
- Life expectancy of 35,000 hours (L70 B50)

Photometrics

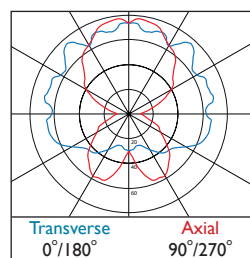

540 ULOR: 0.38 DLOR: 0.33

Gear types F & G must be operated through a DSI

- A Integral Driver
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hancel.co.uk Web: www.hancel.co.uk

Hancel[®]
Fluent in Lighting