


3	Warm White LED (3000K)	CRI 80 17W
	Lumen Output	2704 lm
	LOR	0.83
	CRI	80
	Total Power	19.4W
	Power Factor	0.95
	Running Current	0.09A
	Inrush Current	21.0A (126us)
	Efficacy	115 lm/W
	Emergency Output (BLF)	405 (15%)
4	Neutral White LED (4000K)	CRI 80 17W
	Lumen Output	2832 lm
	LOR	0.83
	CRI	80
	Total Power	19.4W
	Power Factor	0.95
	Running Current	0.09A
	Inrush Current	21.0A (126us)
	Efficacy	121 lm/W
	Emergency Output (BLF)	424 (15%)

- Distinctive sculpted design, incorporating high performance Zhaga book 7 LED
- Available in a choice of lumen outputs, delivering up to 2832 lumens
- Efficacies up to 121 lm/W
- Colour stability within 3 MacAdams
- High quality Opal Polycarbonate Diffuser
- Perfect equal balance of uplighting and downlighting
- Life expectancy in excess of 53,000 hours (L80 B10)
- Versatile control options available

Cenaro


LED

17W LED WL045 LED 17 415

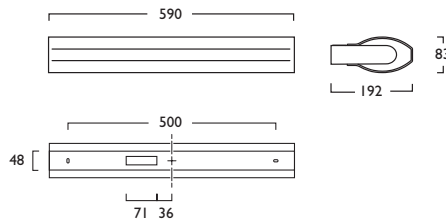

230V 50Hz IP 20 500mm 3.4 kg

Photometrics



Gear types F & G must be operated through a DSI

- A Integral Driver
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency

3 Warm (3000K) 4 Neutral (4000K)

I White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk