




3 Warm White LED (3000K)	CRI 80	
	10W	16W
Lumen Output	1368 lm	2128 lm
LOR	0.91	0.91
CRI	80	80
Total Power	11.9W	18.4W
Power Factor	0.95	0.95
Running Current	0.05A	0.08A
Inrush Current	16.0A (208us)	16.0A (208us)
Efficacy	104 lm/W	105 lm/W
Emergency Output (BLF)	N/A	N/A

4 Neutral White LED (4000K)	CRI 80	
	10W	16W
Lumen Output	1440 lm	2240 lm
LOR	0.91	0.91
CRI	80	80
Total Power	11.9W	18.4W
Power Factor	0.95	0.95
Running Current	0.05A	0.08A
Inrush Current	16.0A (208us)	16.0A (208us)
Efficacy	110 lm/W	110 lm/W
Emergency Output (BLF)	N/A	N/A


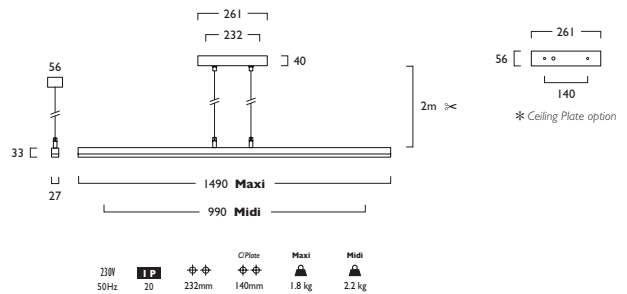


Explora® Linear Pendant

LED CRI 80		10W		16W		
10W	LED	Midi	PN459	LED	10	484
16W	LED	Maxi	PN1107	LED	16	487

- Minimalistic LED linear pendant with chrome trim feature
- Choice of lumen outputs, delivering up to 2240 lumens
- Efficacies of up to 110 lm/W
- Life expectancy of 35,000 hours (L70 B50)
- Single colour, with RGB available on request
- Supplied with Ceiling Plate option allowing Driver to be hidden in ceiling void if required *W
- Colour options apply to Driver Housing

Photometrics

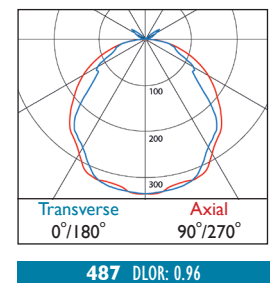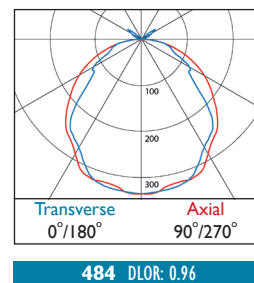

- A Integral Driver
- J Switch Dim
- S DALI Dim

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005) Colour options apply to Driver Housing

331 2x 5m Suspensions (wires only)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk