




iMod® Solo Grid

Fluorescent		Gear		Color		Recessing	
2x 14W	TFL G5	IM098	TFL214	I	+	093	198
2x 24W	TFL G5	IM098	TFL224	I	+	093	198
40W	PLL 2G11	IM098	PLL040	I	+	093	199
55W	PLL 2G11	IM098	PLL055	I	+	093	199



230V
50Hz

IP
20

6.0 kg


LG7 in accordance with SLL Code for Lighting 2012

- Impressive Fluorescent LOR figures - TFL 0.80, PLL 0.74
- Tool free lamp change and refractor cleaning
- Maintains flush ceiling appearance
- Shallow recessing depth
- Engineered for maximum control and performance
- Suitable for 15mm and 25mm T grid ceilings
- Refractor is TP(b) rated

Recessing Option

Designed for plasterboard type ceilings


093 Recessing bezel white



615 x 615

2.8 kg

Photometrics

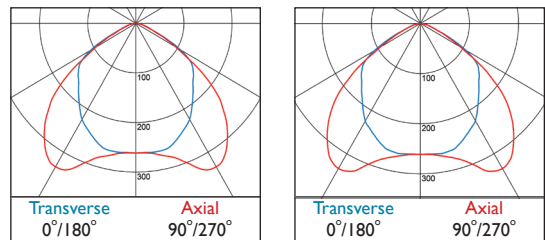

198 DLOR: 0.82

199 DLOR: 0.86

Gear types F & G must be operated through a DSI

- D** High Frequency
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

I White (RAL 9010)

093 Recessing bezel white

Interconnection options available contact Sales