




iMod® Trim Grid



Fluorescent

40W	PLL	2G11	IM023	—	PLL040	I	+	223
55W	PLL	2G11	IM023	—	PLL055	I	+	223
80W	PLL	2G11	IM023	—	PLL080	I	+	223

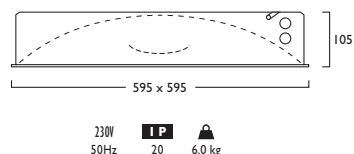


- Class leading photometric performance for Fluorescent light source
- Exceptional LOR of 0.83
- Suitable for 15mm and 25mm T grid ceilings
- Perfect for areas requiring a high level of ambient lighting
- Comprehensive range of branded high frequency gear types available
- Polycarbonate refractor designed for maximum control and performance


Recessing Option

Designed for plasterboard type ceilings

093 Recessing bezel white

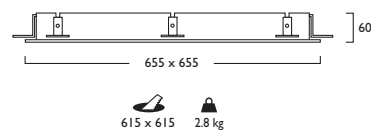

Photometrics



223 DLOR: 0.83

Gear types F & G must be operated through a DSI

- D** High Frequency
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

I White (RAL 9010)

093 Recessing bezel white

Interconnection options available contact Sales