




3 Warm White LED (3000K)	CRI 80	17W	31W
Lumen Output		2560 lm	5120 lm
LOR		0.73	0.73
CRI		80	80
Total Power		18.6W	35.5W
Power Factor		0.90	0.95
Running Current		0.09A	0.16A
Inrush Current		8.0A (100us)	23.3A (168us)
Efficacy		100 lm/W	105 lm/W
Emergency Output (BLF)		409 (16%)	409 (8%)

4 Neutral White LED (4000K)	CRI 80	17W	31W
Lumen Output		2672 lm	5346 lm
LOR		0.73	0.73
CRI		80	80
Total Power		18.6W	35.5W
Power Factor		0.90	0.95
Running Current		0.09A	0.16A
Inrush Current		8.0A (100us)	23.3A (168us)
Efficacy		104 lm/W	109 lm/W
Emergency Output (BLF)		427 (16%)	427 (8%)

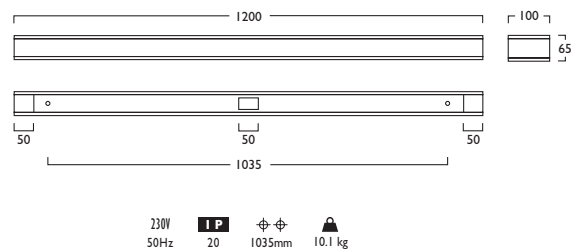

Linaj Link

Left

LED	17W	31W	LED	17W	31W	+	+	433	433
LED	1200mm	1200mm	WL947	WL947					

Centre

LED	17W	31W	LED	17W	31W	+	+	433	433
LED	1200mm	1200mm	WL945	WL945					

Right

LED	17W	31W	LED	17W	31W	+	+	433	433
LED	1200mm	1200mm	WL946	WL946					

- Sleek stunning minimalistic design
- Available in a choice of lumen outputs, delivering up to 5346 lumens
- Efficacies up to 109 lm/W
- High quality 10mm Etched glass to upper and lower fascia
- 55,000 hour life expectancy (L80 B10)
- Horizontal and vertical mounting, Linaj Solo format available
- Striking optional Luminescent Trims offer colour customisation

Gear types F & G must be operated through a DSI

- A Integral Driver
- E Emergency
- F Digital Dim
- G Digital Dim + Emergency
- J Switch Dim
- K K Switch Dim + Emergency
- S DALI Dim
- T DALI Dim + Emergency
- C DALI Dim + DALI Emergency

- 3 Warm (3000K) 4 Neutral (4000K)
- 1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)
- Luminescent Trim *Shown*


Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk




Linaj Link

Options

■ Luminescent Trim



275 Neptune Blue




276 Mars Red



278 Acid Green

Photometrics

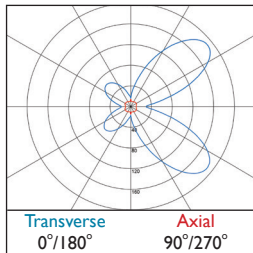

433 ULOR: 0.36 DLOR: 0.37