


5




Linear Light5 Aleda Adjustable

Link & Solo Suspended




- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 4x 2m Wire Suspensions

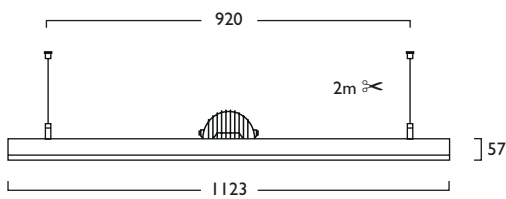




Link Suspended Aleda Solo

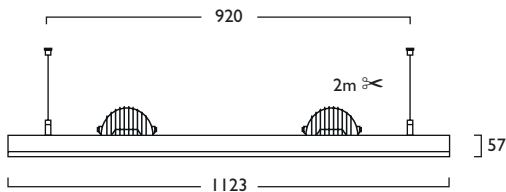



Link Suspended Aleda Duet

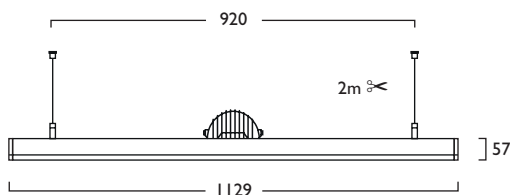


Solo Suspended Aleda Solo

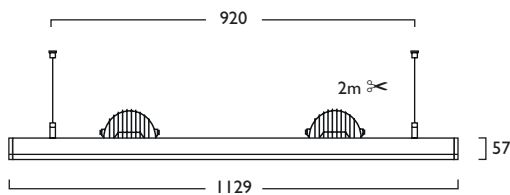

Solo Suspended Aleda Duet



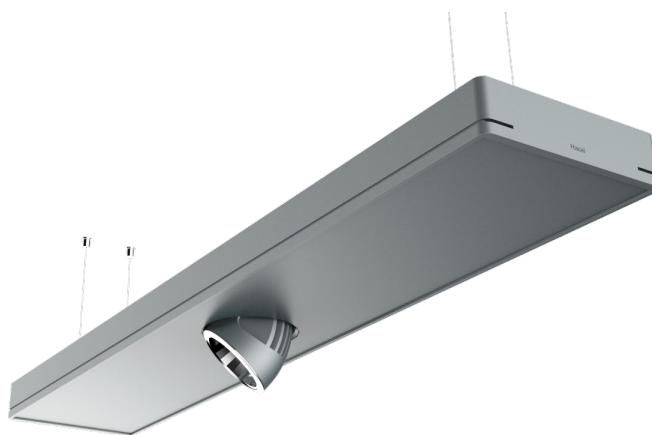

Linear Light5 Aleda Adjustable

Link & Solo Modules

		☀		☾		□		K		⊕		▲	
		LED CRI 80											
1x 12W	LED	1123mm	1072	LED	12	+	377						
1x 17W	LED	1123mm	1072	LED	17	+	377						
1x 24W	LED	1123mm	1072	LED	24	+	377						
1x 31W	LED	1123mm	1072	LED	31	+	377						
2x 12W	LED	1123mm	1074	LED	12	+	377						
2x 17W	LED	1123mm	1074	LED	17	+	377						
2x 24W	LED	1123mm	1074	LED	24	+	377						
2x 31W	LED	1123mm	1074	LED	31	+	377						

		☀		☾		□		K		⊕		▲	
		LED CRI 90											
1x 12W	LED	1123mm	1073	LED	12	+	378						
1x 17W	LED	1123mm	1073	LED	17	+	378						
1x 24W	LED	1123mm	1073	LED	24	+	378						
1x 31W	LED	1123mm	1073	LED	31	+	378						
2x 12W	LED	1123mm	1075	LED	12	+	378						
2x 17W	LED	1123mm	1075	LED	17	+	378						
2x 24W	LED	1123mm	1075	LED	24	+	378						
2x 31W	LED	1123mm	1075	LED	31	+	378						

230V
50Hz

IP
20

920 X 80mm

8.5 kg

- Stylish Aleda® LED in Solo or Duet format neatly integrated into LL5 Module
- Available in a choice of lumen outputs, delivering up to 5029 lumens
- Efficacies up to 127 lm/W
- Single point Zhaga Book 3 LED
- Life expectancy in excess of 60,000 hours (L70 B10)
- Luminaires feature smooth and precise pan and tilt adjustment
- Link and Solo Modules available
- 4x 2m Suspension Wires and Chrome Clutches for ease of adjustment

LA Link Suspended LD Solo Suspended

Gear type F must be operated through a DSI

A Integral LED Driver
F Digital Dim
J Switch Dim
S DALI Dim

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)


Reflector	CRI 80	CRI 90
384 1x Narrow Beam	379	380
385 1x Wide Beam	381	382
480 2x Narrow Beam	379	380
481 2x Wide Beam	381	382

556 4x 5m Suspensions (wires only)

557 2x 2m Single point, twin suspensions (wires only)

144 2x 5m Single point, twin suspensions (wires only)

Luminescent Halo, Baffle Options Shown

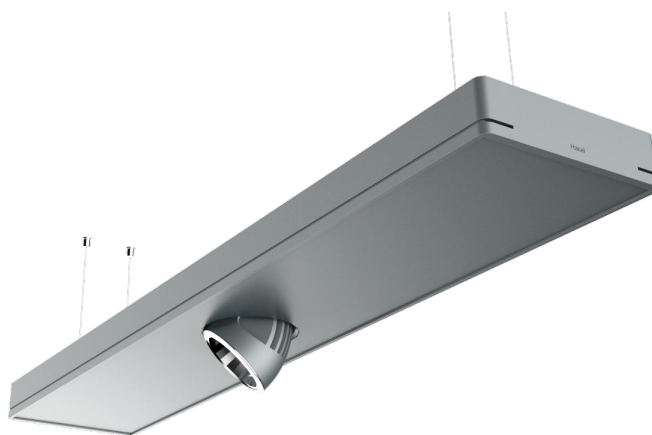


Linear Light5 Aleda Adjustable

	CRI 80				CRI 90			
	12W	17W	24W	31W	12W	17W	24W	31W
3 Warm White LED (3000K)								
Lumen Output	1945 lm	2715 lm	3838 lm	4823 lm	1648 lm	2299 lm	3251 lm	4085 lm
LOR	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
CRI	80	80	80	80	90	90	90	90
Total Power	13.2W	18.8W	25.5W	33.5W	13.2W	18.8W	25.5W	33.5W
Power Factor	0.90	0.93	0.95	0.96	0.90	0.93	0.95	0.96
Running Current	0.06A	0.09A	0.12A	0.15A	0.06A	0.09A	0.12A	0.15A
Inrush Current	8.0A (80us)	8.0A (80us)	10.0A (100us)	10.0A (100us)	8.0A (80us)	8.0A (80us)	10.0A (100us)	10.0A (100us)
Efficacy	117 lm/W	116 lm/W	121 lm/W	116 lm/W	101 lm/W	99 lm/W	103 lm/W	98 lm/W
Emergency Output (BLF)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4 Neutral White LED (4000K)								
Lumen Output	2028 lm	2830 lm	4002 lm	5029 lm	1767 lm	2465 lm	3486 lm	4380 lm
LOR	0.81	0.81	0.81	0.81	0.81	0.81	0.81	0.81
CRI	80	80	80	80	90	90	90	90
Total Power	13.2W	18.8W	25.5W	33.5W	13.2W	18.8W	25.5W	33.5W
Power Factor	0.90	0.93	0.95	0.96	0.90	0.93	0.95	0.96
Running Current	0.06A	0.09A	0.12A	0.15A	0.06A	0.09A	0.12A	0.15A
Inrush Current	8.0A (80us)	8.0A (80us)	10.0A (100us)	10.0A (100us)	8.0A (80us)	8.0A (80us)	10.0A (100us)	10.0A (100us)
Efficacy	124 lm/W	121 lm/W	127 lm/W	121 lm/W	108 lm/W	106 lm/W	110 lm/W	105 lm/W
Emergency Output (BLF)	N/A	N/A	480 lm (12%)	N/A	N/A	N/A	N/A	N/A


Table applies to one LED Light Engine

Options


■ Luminescent Halo, Baffle Options




473 1x / 486 2x
Etched Ice




474 1x / 487 2x
Neptune Blue




475 1x / 488 2x
Mars Red




477 1x / 489 2x
Acid Green




478 1x / 490 2x
Anti Glare Baffle

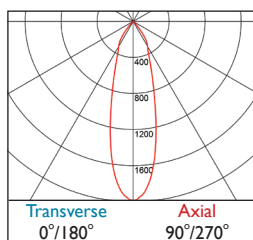

377-378 DLOR: 0.81

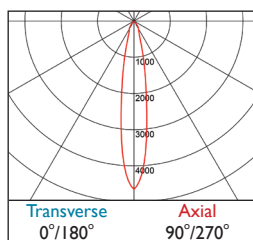

379-380 DLOR: 0.83

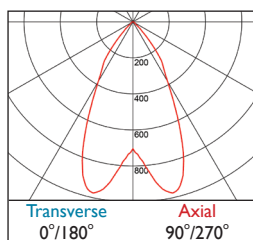

381-382 DLOR: 0.86