

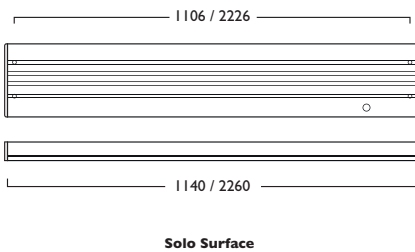

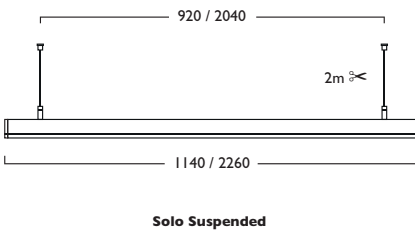

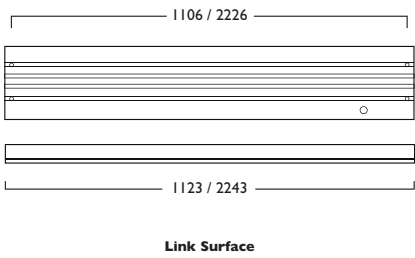



# 5

## Linear Light5 UGR Direct

### Link & Solo Suspended & Surface

- Exciting and imaginative surface or suspended horizontal system
- Allows a diverse range of lighting scenarios to be created
- Encompasses design, performance and quality engineering
- Available in a choice of powder coated finishes including corporate colours to order
- Branded components ensure maximum level of performance and reliability
- Suspended Modules are supplied with 4x 2m Wire Suspensions

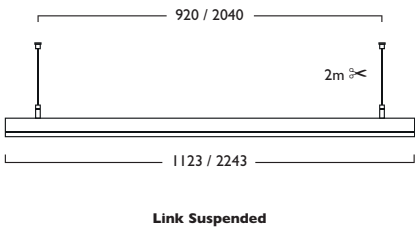

Viewed from above



## Linear Light5 UGR Direct

### Link & Solo Modules

Power	Technology	Length	Gear	Code	LED	Length	Power	Options	Price
27W	LED	1123mm	---	1025	---	LED	27	+	494
54W	LED	2243mm	---	1049	---	LED	54	+	495

### Link L Modules (Left)

Power	Technology	Length	Gear	Code	LED	Length	Power	Options	Price
27W	LED	1128mm	---	1029	---	LED	27	+	494
54W	LED	2248mm	---	1053	---	LED	54	+	495

### Link L Modules (Right)

Power	Technology	Length	Gear	Code	LED	Length	Power	Options	Price
27W	LED	1128mm	---	1033	---	LED	27	+	494
54W	LED	2248mm	---	1057	---	LED	54	+	495

### Link T Modules (Left)

Power	Technology	Length	Gear	Code	LED	Length	Power	Options	Price
27W	LED	1123mm	---	1037	---	LED	27	+	494
54W	LED	2243mm	---	1061	---	LED	54	+	495

### Link T Modules (Right)

Power	Technology	Length	Gear	Code	LED	Length	Power	Options	Price
27W	LED	1123mm	---	1041	---	LED	27	+	494
54W	LED	2243mm	---	1065	---	LED	54	+	495

### Link X Modules

Power	Technology	Length	Gear	Code	LED	Length	Power	Options	Price
27W	LED	1123mm	---	1045	---	LED	27	+	494
54W	LED	2243mm	---	1069	---	LED	54	+	495

X Modules not available in Emergency Gear Types

230V 50Hz	IP 20	LA, LD 920 X 80mm 2040 X 80mm	LC, LF 1106 X 80mm 2226 X 80mm	7.5 kg 15.0 kg
--------------	----------	-------------------------------------	--------------------------------------	-------------------

- Contemporary LED Module with high quality Micro Prism refractor offering UGR 18.8
- Zhaga Book 7 LED
- Available in a choice of lumen outputs, delivering up to 9314 lumens
- Efficacies up to 115 lm/W
- Life expectancy in excess of 51,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- 4x 2m suspension wires and chrome clutches for ease of adjustment

LA	Link Suspended	LC	Link Surface
LD	Solo Suspended	LF	Solo Surface

#### Gear types F & G must be operated through a DSI

A	Integral Driver
E	Emergency
F	Digital Dim
G	Digital Dim + Emergency
J	Switch Dim
K	Switch Dim + Emergency
S	DALI Dim
T	DALI Dim + Emergency
C	DALI Dim + DALI Emergency

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

556	4x 5m Suspensions (wires only)
557	2x 2m Single point, twin suspensions (wires only)
144	2x 5m Single point, twin suspensions (wires only)


Tel: (0191) 280 9911 Email: [technical@hacel.co.uk](mailto:technical@hacel.co.uk) Web: [www.hacel.co.uk](http://www.hacel.co.uk)



## Linear Light5 UGR Direct

3	Warm White LED (3000K)	CRI 80	27W	54W
	Lumen Output		4446 lm	8892 lm
	LOR		0.75	0.75
	CRI		80	80
	Total Power		30.2W	60.4W
	Power Factor		0.95	0.95
	Running Current		0.14A	0.28A
	Inrush Current		15.0A (250us)	30.0A (250us)
	Efficacy		110 lm/W	110 lm/W
	Emergency Output (BLF)		444 lm (10%)	444 lm (5%)

4	Neutral White LED (4000K)	CRI 80	27W	54W
	Lumen Output		4657 lm	9314 lm
	LOR		0.75	0.75
	CRI		80	80
	Total Power		30.2W	60.4W
	Power Factor		0.95	0.95
	Running Current		0.14A	0.28A
	Inrush Current		15.0A (250us)	30.0A (250us)
	Efficacy		115 lm/W	115 lm/W
	Emergency Output (BLF)		465 lm (10%)	465 lm (5%)

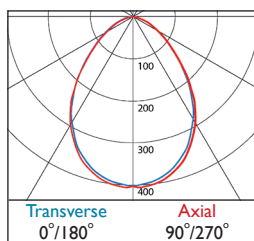

**494-495** DLOR: 0.75