

Network Structural System

A distinctive and versatile high quality suspended Structural System. Integrated luminaires create imaginative general, ambient and accent lighting applications, eminently suited to both large and small installations.

Innovative

- Stylish, exciting Structural Lighting System
- Network creates geometric and abstract visual compositions
- Cleanly encompasses both ambient and accent lighting requirements

Installation


- High quality construction designed for ease of installation
- Network structure features returned edge profile for rigidity and cable concealment
- Each luminaire is pre-wired to its own terminal point
- Twin, single point fixing suspension wires enable adjustable mounting at various points on the system


Interconnection Wiring System

- Luminaires can be specified with Interconnecting Wiring System
- Offers quick and efficient installation
- Reduces cost and offers compliance, electrical safety and simplified maintenance


Image

- Luminaires and accessories are co-ordinated to create a total image
- To create individuality, corporate colours are available to special order to further enhance brand appeal

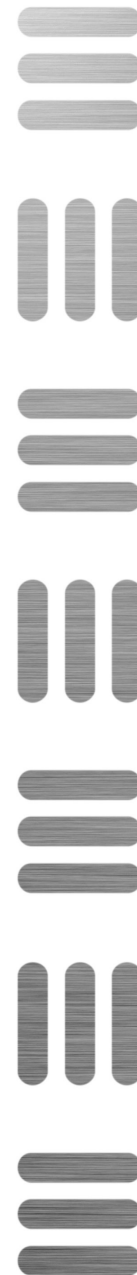

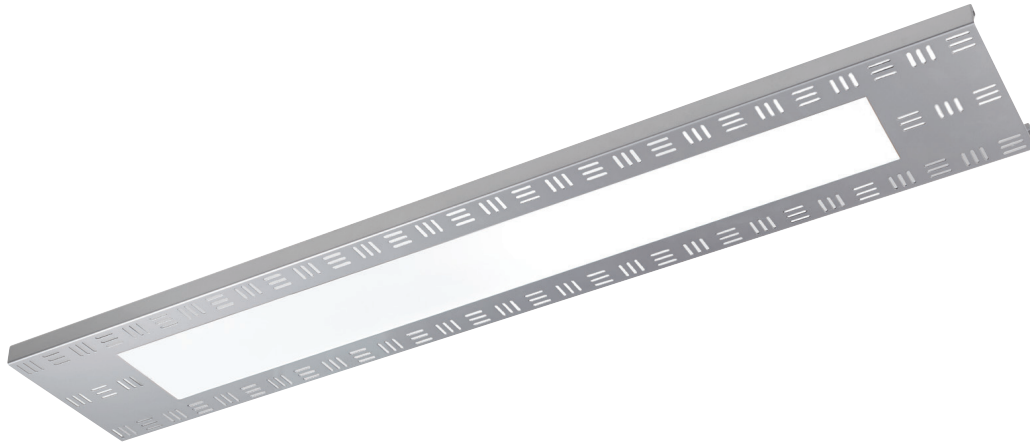

	CRI 80	25W	46W
3 Warm White LED (3000K)			
Lumen Output		4086 lm	6930 lm
LOR		0.87	0.87
CRI		80	80
Total Power		26.3W	50.8W
Power Factor		0.98	0.95
Running Current		0.12A	0.23A
Inrush Current		32.0A (240us)	33.0A (250us)
Efficacy		135 lm/W	118 lm/W
Emergency Output (BLF)		449 (11%)	415 (6%)
4 Neutral White LED (4000K)			
Lumen Output		4268 lm	7240 lm
LOR		0.87	0.87
CRI		80	80
Total Power		26.3W	50.8W
Power Factor		0.98	0.95
Running Current		0.12A	0.23A
Inrush Current		32.0A (240us)	33.0A (250us)
Efficacy		141 lm/W	123 lm/W
Emergency Output (BLF)		469 (11%)	434 (6%)



Network Opal

Opal - 1500mm Modules



LED

25W LED	NW159	LED	25	402
46W LED	NW159	LED	46	402

- Opal LED Fascias offer superior uniform light distribution with an exceptional LOR of 0.87
- Zhaga Book 7 LED
- High quality polycarbonate diffuser with wipe clean surface
- Available in a choice of lumen outputs, delivering up to 7240 lumens
- Efficacies up to 141 lm/W
- Life expectancy of 51,000 hours (L80 B10)

Gear types F & G must be operated through a DSI


- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

3 Warm (3000K) **4** Neutral (4000K)

1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk

Photometrics

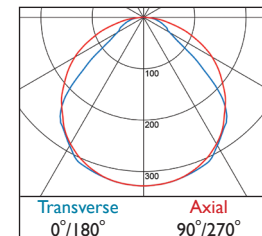

402 DLOR: 0.87

Hacel[®]
Fluent in Lighting