




	CRI 80			
	6W	9W	13W	
3 Warm White LED (3000K)				
Lumen Output	985 lm	1362 lm	1863 lm	
LOR	0.83	0.83	0.83	
CRI	80	80	80	
Total Power	7.4W	10.4W	15.6W	
Power Factor	0.92	0.90	0.90	
Running Current	0.03A	0.05A	0.08A	
Inrush Current	17.0A (309us)	5.0A (100us)	5.0A (100us)	
Efficacy	110 lm/W	108 lm/W	99 lm/W	
Emergency Output (BLF)	394 (40%)	381 (28%)	353 (19%)	
4 Neutral White LED (4000K)				
Lumen Output	1089 lm	1506 lm	2059 lm	
LOR	0.83	0.83	0.83	
CRI	80	80	80	
Total Power	7.4W	10.4W	15.6W	
Power Factor	0.92	0.90	0.90	
Running Current	0.03A	0.05A	0.08A	
Inrush Current	17.0A (309us)	5.0A (100us)	5.0A (100us)	
Efficacy	122 lm/W	120 lm/W	109 lm/W	
Emergency Output (BLF)	435 (40%)	421 (28%)	391 (19%)	



Pebi[®] Surface

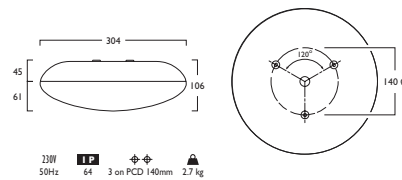

LED

6W	LED	SD898	LED	06	+	500
9W	LED	SD898	LED	09	+	500
13W	LED	SD898	LED	13	+	500

LED & MW

6W	LED	SD1165	LED	06	+	500
9W	LED	SD1165	LED	09	+	500
13W	LED	SD1165	LED	13	+	500

Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim (SD898 only)
- K** Switch Dim + Emergency (SD898 only)
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

3 Warm (3000K) **4** Neutral (4000K)


1 White (RAL 9010) **2** Urban Graphite (RAL 7046) **3** Black (RAL 9005)

Options

- 560** Gasket (IP64)
- 259** Tamperproof Screwdriver (T20)

- Lumens outputs up to 2059 lumens
- Efficacies up to 122 lm/W
- Life expectancy in excess of 50,000 Hours (L80 B10)
- Colour Stability within 3 MacAdams
- Microwave control is discretely concealed behind diffuser
- IK10 compliant
- Supplied with both standard and tamperproof Diffuser Retaining Screws
- Complementary Wall Light versions available

Photometrics



500 DLOR: 0.83