




3 Warm White LED (3000K)		CRI 80	7W	8W	12W	15W
Lumen Output			520 lm	1116 lm	1488 lm	1860 lm
LOR			0.84	0.84	0.84	0.84
CRI			80	80	80	80
Total Power			7.0W	9.8W	13.8W	17.7W
Power Factor			N/A	0.90	0.94	0.94
Running Current			0.03A	0.05A	0.06A	0.08A
Inrush Current			N/A	6A (20us)	4A (40us)	4A (40us)
Efficacy			62 lm/W	95 lm/W	90 lm/W	88 lm/W
Emergency Output (BLF)			N/A	N/A	N/A	N/A

4 Neutral White LED (4000K)		CRI 80	7W	8W	12W	15W
Lumen Output			520 lm	1224 lm	1632 lm	2040 lm
LOR			0.84	0.84	0.84	0.84
CRI			80	80	80	80
Total Power			7.0W	9.8W	13.8W	17.7W
Power Factor			N/A	0.90	0.94	0.94
Running Current			0.03A	0.05A	0.06A	0.08A
Inrush Current			N/A	6A (20us)	4A (40us)	4A (40us)
Efficacy			62 lm/W	104 lm/W	99 lm/W	96 lm/W
Emergency Output (BLF)			N/A	N/A	N/A	N/A

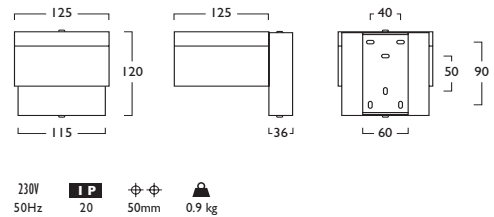


Quba Solo



Power	LED	WL060	A	LED	07	426
7W	LED	WL060	A	LED	07	426
8W	LED	WL060	A	LED	08	426
12W	LED	WL060	A	LED	12	426
15W	LED	WL060	A	LED	15	426

- Sharp design, cutting edge appearance
- Available in a choice of lumen outputs, delivering up to 2040 lumens
- Efficacies up to 104 lm/W
- Discreetly etched polycarbonate diffusers
- Life expectancy in excess of 50,000 hours (L80 B10) excluding 7W
- Colour stability within 3 MacAdams

Photometrics



Gear type F must be operated through a DSI

- A Integral Driver
- F Digital Dim
- J Switch Dim
- S DALI Dim

3 Warm (3000K) 4 Neutral (4000K)

1 White (RAL 9010) 2 Urban Graphite (RAL 7046) 3 Black (RAL 9005)

Tel: (0191) 280 9911 Email: technical@hacel.co.uk Web: www.hacel.co.uk