




## SkyMod® Wave Grid

**LED**

21W	LED	IM1178	LED	21	I	501
33W	LED	IM1178	LED	33	I	501
46W	LED	IM1178	LED	46	I	501

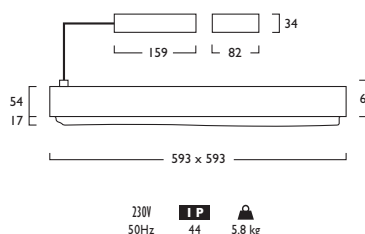

Designed for 15mm and 25mm T grid ceilings

3	Warm White LED (3000K)	CRI 80	21W	33W	46W
	Lumen Output		3542 lm	5192 lm	6780 lm
	LOR		0.82	0.82	0.82
	CRI		80	80	80
	Total Power		24.1W	37.2W	49.9W
	Power Factor		0.95	0.95	0.95
	Running Current		0.11A	0.17A	0.23A
	Inrush Current		15.0A (230us)	21.0A (250us)	28.0A (210us)
	Efficacy		120 lm/W	114 lm/W	111 lm/W
	Emergency Output (BLF)		425 lm (12%)	415 lm (8%)	406 lm (6%)


  

4	Neutral White LED (4000K)	CRI 80	21W	33W	46W
	Lumen Output		3780 lm	5540 lm	7236 lm
	LOR		0.82	0.82	0.82
	CRI		80	80	80
	Total Power		24.1W	37.2W	49.9W
	Power Factor		0.95	0.95	0.95
	Running Current		0.11A	0.17A	0.23A
	Inrush Current		15.0A (230us)	21.0A (250us)	28.0A (210us)
	Efficacy		128 lm/W	122 lm/W	118 lm/W
	Emergency Output (BLF)		453 lm (12%)	443 lm (8%)	434 lm (6%)

### LG7 in accordance with SLL Code for Lighting 2012\*

- Features a distinctive contoured Opal polycarbonate diffuser with wipe clean surface
- Available in a choice of lumen outputs, delivering up to 7236 lumens
- Efficacies up to 128 lm/W
- 21W version has luminance limits below 3000cd/m<sup>2</sup> at the 65° cut off \*
- Life expectancy in excess of 60,000 hours (L80 B10)
- Colour stability within 3 MacAdams
- Wide choice of high quality control gear
- TP(b) rated as standard

### Photometrics



#### Gear types F & G must be operated through a DSI

- A** Integral Driver
- E** Emergency
- F** Digital Dim
- G** Digital Dim + Emergency
- J** Switch Dim
- K** Switch Dim + Emergency
- S** DALI Dim
- T** DALI Dim + Emergency
- C** DALI Dim + DALI Emergency

**3** Warm (3000K)    **4** Neutral (4000K)

**I** White (RAL 9010)

Interconnection options available contact Sales