

Uniclass L74 735	EPIC K712
CI/Sfb (62X) (63) X	

The
Hamilton[®]
Collection
excellence and elegance...

electrical wiring accessories • audio and lighting controls



2013 sees Hamilton celebrating 45 years in business. It is still a family owned Company, under the overall direction of its founder Rod Hamilton and his son Ian Hamilton.

A pioneer in the market of decorative plates for switches, sockets and lighting controls, the Company continues to lead the way setting trends in both designs and finishes.

Recent years have seen a shift in fashion from ornate brass to plain, understated, monochromatic styles. At the same time, Hamilton has developed its own range of inserts, broadening its scope from box-fix to grid-fix, Euro-fix and concealed fixing.

Aiming to be a single-source for the specifier and installer, the Company now bases its product development on a "family" theme with new items designed for all versions of each plate, whether box, grid, Euro or concealed fixing.

The latest evolution of product has taken place with the Perception range of transparent plates with concealed fixing and state-of-the-art Mercury Audio Control and Mercury Lighting Control systems.

Thus the company is well placed to move into its 45th year and beyond.



**Linea-Rondo CFX
Piano Black Range**

Quality Concealed Fixing accessories on Smooth Rounded Edge Plates...

Pages 2 – 10



**Linea-Rondo CFX
Range**

Quality Concealed Fixing accessories on Smooth Rounded Edge Plates...


Pages 12 – 35



**Linea-Duo CFX
Range**

Quality Concealed Fixing accessories on Minimalist Straight Edge Plates...

Pages 36 – 59



**Linea-Scala CFX
Range**

Quality Concealed Fixing accessories on Delicate Stepped Edge Plates...

Pages 60 – 83



**Linea-Perlina CFX
Range**

Quality Concealed Fixing accessories on Beaded Edge Plates...

Pages 84 – 97



**Linea-Georgian CFX
Range**

Quality Concealed Fixing accessories on Georgian Rope Edge Plates...

Pages 98 – 111



**Mercury
Audio Control**

Bespoke Audio and Data Control System...


Pages 112 – 113



**Mercury
Lighting Control**

Bespoke Lighting Control System...

Pages 114 – 115



Savile Row

Bespoke Electrical Wiring Accessories Tailor Made to your requirements.

Pages 116 – 121



GRID-IT Modules

A comprehensive range of quality Grid Fix Modules and Plates...

Pages 122 – 133



EuroFix Modules

A comprehensive range of Data and Media Modules and Plates...

Pages 134 – 139



Hartland Range

Quality accessories on Super Slim Plates...

Pages 140 – 159



Hartland CFX Range

Quality Concealed Fixing accessories on Super Slim Plates...

Pages 160 – 179



Hartland CFX Colours

Concealed Fixing accessories on Super Slim Coloured Plastic...

Pages 180 – 187



**Perception CFX
Range**

Quality Concealed Fixing accessories on Subtle Transparent Plates that blend perfectly with any decor...

Pages 188 – 203



Sheer Range

Quality accessories on Stylish Flat plates...

Pages 204 – 223



Sheer CFX Range

Quality Concealed Fixing accessories on Stylish Flat Plates...

Pages 224 – 243



**Sheer Floor Socket
Range**

Quality Floor Sockets on Stylish Flat Plates...


Pages 244 – 249



Cheriton Range

Quality accessories on Georgian and Victorian style plates...

Pages 250 – 269



Bloomsbury Range

Antique style Plain and Fluted Toggle Switches on Natural Wood Plinth Plates...

Pages 270 – 275



Woods Range

Quality accessories on Natural Wood Finish Plates...

Pages 276 – 293



**White Plastic
Dimmer Switches**

Pages 294 – 295



**ICDM1000
1000W
Ceiling Dimmer**

Pages 296 – 297



Lighting Ancillaries

Electronic Transformers and Dimmable LED Drivers

Pages 298 – 301



**Perfect Partners
& Giara Martellato
CFX Range**

Concealed Fixing accessories with complementary Door Handles...

Pages 302 – 311



**Technical
Specifications**

Pages 312 – 336

Hamilton® GRID-IT Modules

A comprehensive range of Grid-Fix electrical wiring accessory modules


Grid-It switches and sockets are grid-fixed to provide flexibility. Separate modules can be clipped together on the grid to create the desired combination.

This can be done on-site for an instant solution.

- Flexibility of separate modules
- Clip-in inserts to create project-specific combinations
- Larger sized plates
- Neon switch halos for visual identification; available in four colours
- Printed words or symbols for appliance or function identification
- Available on many regular Hamilton plate styles



Hamilton® *fashion, finish, function and flexibility*



8P + I K21 B + I R21 SS-B



77C + I NO R



86C + I KEL W



72 + I FN SB-R



86 + I SS1 SC-W

Hamilton® GRID-IT Modules

Rocker Switch Modules

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-1



Technical Insert Reference:	Bright Chrome Insert White Surround Product Code:	Bright Chrome Insert Black Surround Product Code:	Satin Chrome Insert White Surround Product Code:	Satin Chrome Insert Black Surround Product Code:	Satin Stainless Insert White Surround Product Code:	Satin Stainless Insert Black Surround Product Code:
1 gang 10AX 2 way Rocker	GR21	I R21 BC-W	I R21 SC-W	I R21 SC-B	I R21 SS-W	I R21 SS-B
1 gang 20AX 2 way Rocker	GR212	I R212 BC-W	I R212 SC-W	I R212 SC-B	I R212 SS-W	I R212 SS-B
1 gang 20AX Double Pole Rocker	GDP	I DP BC-W	I DP SC-W	I DP SC-B	I DP SS-W	I DP SS-B
1 gang 20AX Intermediate Rocker	GR312	I R312 BC-W	I R312 SC-W	I R312 SC-B	I R312 SS-W	I R312 SS-B
1 gang 10AX Push To Make/Break Retractive Rocker	GRRT	I RRT BC-W	I RRT SC-W	I RRT SC-B	I RRT SS-W	I RRT SS-B
1 gang 20AX Non-Retractive 2 Way + Off Rocker	GR2WO	I R2WO BC-W	I R2WO SC-W	I R2WO SC-B	I R2WO SS-W	I R2WO SS-B
1 gang 10AX Retractive 2 Way + Off Rocker	GRR2W	I RR2W BC-W	I RR2W SC-W	I RR2W SC-B	I RR2W SS-W	I RR2W SS-B



Technical Insert Reference:	Polished Brass Insert White Surround Product Code:	Polished Brass Insert Black Surround Product Code:	Satin Brass Insert White Surround Product Code:	Satin Brass Insert Black Surround Product Code:	Antique Brass Insert Black Surround Product Code:
1 gang 10AX 2 way Rocker	GR21	I R21 PB-W	I R21 SB-W	I R21 SB-B	I R21 AB-B
1 gang 20AX 2 way Rocker	GR212	I R212 PB-W	I R212 SB-W	I R212 SB-B	I R212 AB-B
1 gang 20AX Double Pole Rocker	GDP	I DP PB-W	I DP SB-W	I DP SB-B	I DP AB-B
1 gang 20AX Intermediate Rocker	GR312	I R312 PB-W	I R312 SB-W	I R312 SB-B	I R312 AB-B
1 gang 10AX Push To Make/Break Retractive Rocker	GRRT	I RRT PB-W	I RRT SB-W	I RRT SB-B	I RRT AB-B
1 gang 20AX Non-Retractive 2 Way + Off Rocker	GR2WO	I R2WO PB-W	I R2WO SB-W	I R2WO SB-B	I R2WO AB-B
1 gang 10AX Retractive 2 Way + Off Rocker	GRR2W	I RR2W PB-W	I RR2W SB-W	I RR2W SB-B	I RR2W AB-B



Technical Insert Reference:	Pearl Oyster Insert White Surround Product Code:	Black Nickel Insert Black Surround Product Code:	White Plastic Insert White Surround Product Code:	Black Plastic Insert Black Surround Product Code:
1 gang 10AX 2 way Rocker	GR21	I R21 PO-W	I R21 WH-W	I R21 BL-B
1 gang 20AX 2 way Rocker	GR212	I R212 PO-W	I R212 WH-W	I R212 BL-B
1 gang 20AX Double Pole Rocker	GDP	I DP PO-W	I DP WH-W	I DP BL-B
1 gang 20AX Intermediate Rocker	GR312	I R312 PO-W	I R312 WH-W	I R312 BL-B
1 gang 10AX Push To Make/Break Retractive Rocker	GRRT	I RRT PO-W	I RRT WH-W	I RRT BL-B
1 gang 20AX Non-Retractive 2 Way + Off Rocker	GR2WO	I R2WO PO-W	I R2WO WH-W	I R2WO BL-B
1 gang 10AX Retractive 2 Way + Off Rocker	GRR2W	I RR2W PO-W	I RR2W WH-W	I RR2W BL-B

Hamilton GRID-IT Modules

20AX Double Pole Rocker Switch Modules

with Printed Names/Symbol

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-1

						
Technical Insert Reference:	Boiler White Insert White Surround Product Code:	Boiler Black Insert Black Surround Product Code:	Coffee Machine White Insert White Surround Product Code:	Coffee Machine Black Insert Black Surround Product Code:	Cooker Hood White Insert White Surround Product Code:	Cooker Hood Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	I DPBO WH-W	I DPBO BL-B	I DPCM WH-W	I DPCM BL-B	I DPCH WH-W	I DPCH BL-B

						
Technical Insert Reference:	Dish Washer White Insert White Surround Product Code:	Dish Washer Black Insert Black Surround Product Code:	Fan Symbol White Insert White Surround Product Code:	Fan Symbol Black Insert Black Surround Product Code:	Freezer White Insert White Surround Product Code:	Freezer Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	I DPDW WH-W	I DPDW BL-B	I DPFN WH-W	I DPFN BL-B	I DPFZ WH-W	I DPFZ BL-B

						
Technical Insert Reference:	Fridge White Insert White Surround Product Code:	Fridge Black Insert Black Surround Product Code:	Fridge Freezer White Insert White Surround Product Code:	Fridge Freezer Black Insert Black Surround Product Code:	Heater White Insert White Surround Product Code:	Heater Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	IDPFG WH-W	IDPFG BL-B	IDPFF WH-W	IDPFF BL-B	IDPHT WH-W	IDPHT BL-B

						
Technical Insert Reference:	Hob White Insert White Surround Product Code:	Hob Black Insert Black Surround Product Code:	Micro Wave White Insert White Surround Product Code:	Micro Wave Black Insert Black Surround Product Code:	Oven White Insert White Surround Product Code:	Oven Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	IDPHO WH-W	IDPHO BL-B	IDPMW WH-W	IDPMW BL-B	IDPOV WH-W	IDPOV BL-B




						
Technical Insert Reference:	Steam Oven White Insert White Surround Product Code:	Steam Oven Black Insert Black Surround Product Code:	Tumble Dryer White Insert White Surround Product Code:	Tumble Dryer Black Insert Black Surround Product Code:	Warming Drawer White Insert White Surround Product Code:	Warming Drawer Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	IDPSO WH-W	IDPSO BL-B	IDPTD WH-W	IDPTD BL-B	IDPDR WH-W	IDPDR BL-B

Hamilton GRID-IT Modules

20AX Double Pole Rocker Switch Modules

with Printed Names/Symbol

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-1

						
Technical Insert Reference:	Washer Dryer White Insert White Surround Product Code:	Washer Dryer Black Insert Black Surround Product Code:	Washing Machine White Insert White Surround Product Code:	Washing Machine Black Insert Black Surround Product Code:	Waste Disposal White Insert White Surround Product Code:	Waste Disposal Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	IDPWDRY WH-W	IDPWDRY BL-B	IDPWM WH-W	IDPWM BL-B	IDPWD WH-W	IDPWD BL-B

				
Technical Insert Reference:	Water Heater White Insert Black Surround Product Code:	Water Heater Black Insert Black Surround Product Code:	Wine Cooler White Insert Black Surround Product Code:	Wine Cooler Black Insert Black Surround Product Code:
1 gang 20AX Double Pole Rocker GDP	IDPWT WH-W	IDPWT BL-B	IDPWC WH-W	IDPWC BL-B

10AX Push to Make Rocker Switch Modules

with Printed Symbol

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-1

		
Technical Insert Reference:	Bell Push White Insert White Surround Product Code:	Bell Push Black Insert Black Surround Product Code:
1 gang 10AX Push to Make Retractive Rocker GRRT	IBP WH-W	IBP BL-B

20A Cable Outlet Modules

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 5733

		
Technical Insert Reference:	White Insert White Surround Product Code:	Black Insert Black Surround Product Code:
1 gang 20AX Cable Outlet GC20	ICO20 W	ICO20 B

13A Fuse Modules with Amber Neon Halo

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 5733
Replacement Fuses to BS 1362 Standard

					
Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:
1gang 13A Fuse with Amber Neon Halo GFN	IFN BC-A	IFN SC-A	IFN SS-A	IFN PB-A	IFN SB-A

					
Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:
1 gang 13A Fuse with Amber Neon Halo GFN	IFN AB-A	IFN PO-A	IFN BK-A	IFN WH-A	IFN BL-A

Hamilton® GRID-IT Modules

13A Fuse Modules with Red Neon Halo

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS 5733
 Replacement Fuses to BS 1362 Standard

Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:	
1 gang 13A Fuse with Red Neon Halo	GFN	I FN BC-R	I FN SC-R	I FN SS-R	I FN PB-R	I FN SB-R



Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:	
1 gang 13A Fuse with Red Neon Halo	GFN	I FN AB-R	I FN PO-R	I FN BK-R	I FN WH-R	I FN BL-R



13A Fuse Modules with Blue Neon Halo

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS 5733
 Replacement Fuses to BS 1362 Standard

Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:	
1 gang 13A Fuse with Blue Neon Halo	GFN	I FN BC-B	I FN SC-B	I FN SS-B	I FN PB-B	I FN SB-B



Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:	
1 gang 13A Fuse with Blue Neon Halo	GFN	I FN AB-B	I FN PO-B	I FN BK-B	I FN WH-B	I FN BL-B



13A Fuse Modules with Green Neon Halo

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS 5733
 Replacement Fuses to BS 1362 Standard

Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:	
1 gang 13A Fuse with Green Neon Halo	GFN	I FN BC-G	I FN SC-G	I FN SS-G	I FN PB-G	I FN SB-G



Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:	
1 gang 13A Fuse with Green Neon Halo	GFN	I FN AB-G	I FN PO-G	I FN BK-G	I FN WH-G	I FN BL-G



Hamilton® GRID-IT Modules

Neon Modules with Amber Neon Halo

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS 5733

Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:	
1 gang Amber Neon Halo Module	GN	I N BC-A	I N SC-A	I N SS-A	I N PB-A	I N SB-A



Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:	
1 gang Amber Neon Halo Module	GN	I N AB-A	I N PO-A	I N BK-A	I N WH-A	I N BL-A



Neon Modules with Red Neon Halo

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS 5733

Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:	
1 gang Red Neon Halo Module	GN	I N BC-R	I N SC-R	I N SS-R	I N PB-R	I N SB-R



Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:	
1 gang Red Neon Halo Module	GN	I N AB-R	I N PO-R	I N BK-R	I N WH-R	I N BL-R



Neon Modules with Blue Neon Halo

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS 5733

Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:	
1 gang Blue Neon Halo Module	GN	I N BC-B	I N SC-B	I N SS-B	I N PB-B	I N SB-B



Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:	
1 gang Blue Neon Halo Module	GN	I N AB-B	I N PO-B	I N BK-B	I N WH-B	I N BL-B



Hamilton GRID-IT Modules

Neon Modules with Green Neon Halo

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 5733

	Technical Insert Reference:	Bright Chrome Insert Product Code:	Satin Chrome Insert Product Code:	Satin Stainless Insert Product Code:	Polished Brass Insert Product Code:	Satin Brass Insert Product Code:
1 gang Green Neon Halo Module	GN	I N BC-G	I N SC-G	I N SS-G	I N PB-G	I N SB-G



	Technical Insert Reference:	Antique Brass Insert Product Code:	Pearl Oyster Insert Product Code:	Black Nickel Insert Product Code:	White Plastic Insert Product Code:	Black Plastic Insert Product Code:
1 gang Green Neon Halo Module	GN	I N AB-G	I N PO-G	I N BK-G	I N WH-G	I N BL-G



Neon Only Modules

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 5733

	Technical Insert Reference:	Amber Neon Product Code:	Red Neon Product Code:	Blue Neon Product Code:	Green Neon Product Code:
1 gang Neon Only Module	GNO	I NO A	I NO R	I NO B	I NO G



Hotel Maid Service Neon Modules

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 5733

	Technical Insert Reference:	'Maid Symbol' Green Neon Product Code:	'Crossed Bell Symbol' Red Neon Product Code:	'PLEASE CLEAN ROOM' Mounted Horizontally Green Neon Product Code:	'DO NOT DISTURB' Mounted Horizontally Red Neon Product Code:
1 gang Hotel Maid Service Neon Module	GNO	I NOMA G	I NOBE R	I NOPCR G	I NODND R



Key Switch Modules Supplied with Key

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-1

	Technical Insert Reference:	White Insert White Surround Product Code:	Black Insert Black Surround Product Code:
1 gang 20AX 2 way Key Switch	GK21	I K21 W	I K21 B
1 gang 20AX Double Pole Key Switch	GKDP	I KDP W	I KDP B



Key Switch Modules Printed 'EMG LTG TEST' Supplied with Key

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-1

	Technical Insert Reference:	'EMG LTG TEST' White Insert White Surround Product Code:	'EMG LTG TEST' Black Insert Black Surround Product Code:
1 gang 20AX Key Switch "EMG LTG TEST"	GKEL	I KEL W	I KEL B



Spare Key

Pack Quantity: 5

	Product Code:
Spare Key	I KEY



Hamilton GRID-IT Modules

Intermediate Push On/Off Switch Module

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 5733

	Technical Insert Reference:	White Insert Product Code:
1 gang 3A Intermediate Push On/Off Switch Module Tungsten Filament and Halogen Rating: Maximum 3A per gang	DIP	I DIP WH



400W Push On/Off Resistive Dimmer Module

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-2-1

Note: Tungsten Filament GU10 Lamps must be branded with a Fused Base.

Note: When using mains voltage halogen lamps - dimmers should be de-rated by 25%.

Note: When dimming LED lamps de-rate by 75% - please contact our Technical Department for compatibility.

	Technical Insert Reference:	White Insert Product Code:
1 gang 400W 2 Way Dimmer Tungsten Filament and Halogen Rating: Minimum 40W per gang Tungsten Filament Rating: Maximum 400W per gang Halogen Rating: Maximum 300W per gang	D40	I D40 WH



Trailing Edge Push On/Off Multi-Way Dimmer Modules

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS EN 60669-2-1

Note: Tungsten Filament GU10 Lamps must be branded with a Fused Base.

Note: When using mains voltage halogen lamps - dimmers should be de-rated by 25%.

Note: When using mains voltage halogen load transformers - maximum rating is 210VA.

Note: When dimming LED lamps de-rate by 75% - please contact our Technical Department for compatibility.

	Technical Insert Reference:	Bright Chrome Knob Product Code:	Satin Chrome Knob Product Code:	Satin Stainless Knob Product Code:	Polished Brass Knob Product Code:	Satin Brass Knob Product Code:	Antique Brass Knob Product Code:	Black Nickel Knob Product Code:
1 gang 250W/210VA Trailing Edge Multi-Way Dimmer	DTE	I DTE BC	I DTE SC	I DTE SS	I DTE PB	I DTE SB	I DTE AB	I DTE BK



Grid Dimmer Inlay Kits Consisting of Black and White Frame with Matching Metal Inlay, Dimmer Knob and Retaining Ring

	Technical Insert Reference:	Bright Chrome Product Code:	Satin Chrome Product Code:	Satin Stainless Product Code:	Polished Brass Product Code:	Satin Brass Product Code:	Antique Brass Product Code:	Black Nickel Product Code:	Pearl Oyster Product Code:
Grid Dimmer Inlay Kit		I DKIT BC	I DKIT SC	I DKIT SS	I DKIT PB	I DKIT SB	I DKIT AB	I DKIT BK	I DKIT PO









I DKIT SC
Satin Chrome
Knob and Insert

I DKIT PB
Polished Brass
Knob and Insert

Hamilton GRID-IT Modules

Trailing Edge Multi-Way Touch Master Dimmer Modules







Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS EN 60669-2-1
 Note: Tungsten Filament GU10 Lamps must be branded with a Fused Base.
 Note: When using mains voltage halogen lamps - dimmers should be de-rated by 25%.
 Note: When using mains voltage halogen load transformers - maximum rating is 210VA.
 Note: When dimming LED lamps de-rate by 75% - please contact our Technical Department for compatibility.

							
Technical Insert Reference:	Bright Chrome Insert White Surround Product Code:	Bright Chrome Insert Black Surround Product Code:	Satin Chrome Insert White Surround Product Code:	Satin Chrome Insert Black Surround Product Code:	Satin Stainless Insert White Surround Product Code:	Satin Stainless Insert Black Surround Product Code:	
1 gang 250W/210VA Trailing Edge Multi-way Touch Master Dimmer	DTM	IDTM BC-W	IDTM BC-B	IDTM SC-W	IDTM SC-B	IDTM SS-W	IDTM SS-B

							
Technical Insert Reference:	Polished Brass Insert White Surround Product Code:	Polished Brass Insert Black Surround Product Code:	Satin Brass Insert White Surround Product Code:	Satin Brass Insert Black Surround Product Code:	Antique Brass Insert Black Surround Product Code:	Black Nickel Insert Black Surround Product Code:	
1 gang 250W/210VA Trailing Edge Multi-way Touch Master Dimmer	DTM	IDTM PB-W	IDTM PB-B	IDTM SB-W	IDTM SB-B	IDTM AB-B	IDTM BK-B

Multi-Way Touch Slave Controller Modules

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm
 British Standard: BS EN 60669-2-1
 Note: To only be used with Touch Master Dimmers.
 Note: Tungsten Filament GU10 Lamps must be branded with a Fused Base.
 Note: When using mains voltage halogen lamps - dimmers should be de-rated by 25%.
 Note: When using mains voltage halogen load transformers - maximum rating is 210VA.

							
Technical Insert Reference:	Bright Chrome Insert White Surround Product Code:	Bright Chrome Insert Black Surround Product Code:	Satin Chrome Insert White Surround Product Code:	Satin Chrome Insert Black Surround Product Code:	Satin Stainless Insert White Surround Product Code:	Satin Stainless Insert Black Surround Product Code:	
1 gang Multi-Way Touch Slave Controller	DTS	IDTS BC-W	IDTS BC-B	IDTS SC-W	IDTS SC-B	IDTS SS-W	IDTS SS-B

							
Technical Insert Reference:	Polished Brass Insert White Surround Product Code:	Polished Brass Insert Black Surround Product Code:	Satin Brass Insert White Surround Product Code:	Satin Brass Insert Black Surround Product Code:	Antique Brass Insert Black Surround Product Code:	Black Nickel Insert Black Surround Product Code:	
1 gang Multi-Way Touch Slave Controller	DTS	IDTS PB-W	IDTS PB-B	IDTS SB-W	IDTS SB-B	IDTS AB-B	IDTS BK-B

Hamilton GRID-IT Modules

Blanking Modules

Pack Quantity: 5
 Minimum Wall Box Depth: 35 mm

						
Blanking Module	Bright Chrome Insert White Surround Product Code: IBMOD BC-W	Bright Chrome Insert Black Surround Product Code: IBMOD BC-B	Satin Chrome Insert White Surround Product Code: IBMOD SC-W	Satin Chrome Insert Black Surround Product Code: IBMOD SC-B	Satin Stainless Insert White Surround Product Code: IBMOD SS-W	Satin Stainless Insert Black Surround Product Code: IBMOD SS-B





						
Blanking Module	Polished Brass Insert White Surround Product Code: IBMOD PB-W	Polished Brass Insert Black Surround Product Code: IBMOD PB-B	Satin Brass Insert White Surround Product Code: IBMOD SB-W	Satin Brass Insert Black Surround Product Code: IBMOD SB-B	Antique Brass Insert Black Surround Product Code: IBMOD AB-B	Black Nickel Insert Black Surround Product Code: IBMOD BK-B

			
Blanking Module	Pearl Oyster Insert White Surround Product Code: IBMOD PO-W	White Plastic Insert White Surround Product Code: IBMOD WH-W	Black Plastic Insert Black Surround Product Code: IBMOD BL-B

Spare Module Grids










For Sheer, Hartland and Cheriton Front Plates

Pack Quantity: 5

				
Spare Insert Grid	1 gang Product Code: 1G-GRID	2 gang Product Code: 2G-GRID	3 gang Product Code: 3G-GRID	4 gang Product Code: 4G-GRID

Spare Plate Screws

Box Quantity: 50 Size: 5 x 3 mm

										
Dome Headed Slotted Screws for Rocker/Aperture Plates	PSGR WH	PSGR PB	PSGR SB	PSGR BC	PSGR SC	PSGR BC	PSGR PO	PSGR BK	PSGR PO	PSGR AB
Countersunk Slotted Screws for Switched Socket Plates	PSGS WH	PSGS PB	PSGS SB	PSGS BC	PSGS SC	PSGS BC	PSGS PO	PSGS BK	PSGS PO	PSGS AB


Spare Back Box Screws

Bright Zinc Passivated

		
Countersunk Slotted Screws For Back Box	SGBOX25 Box of 50 Size: 25 x 3.5 mm Product Code:	SGBOX50 Box of 50 Size: 50 x 3.5 mm Product Code:

Spare Module Grid Screws


Bright Zinc Passivated

	
Countersunk Cross-Slotted Screws For Grid Insert	SGINS Box of 50 Size: 4 x 2.5 mm Product Code:

Hamilton GRID-IT Modules

1 gang 13A Socket Insert Modules with attached Fixing Grids

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 1363

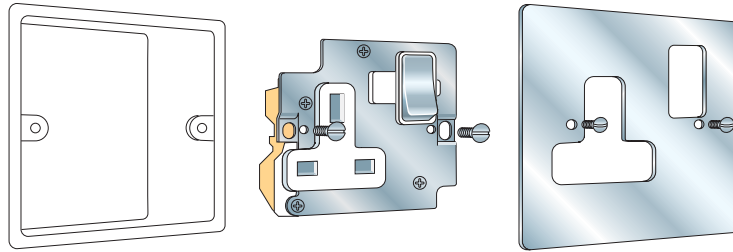

Standard Wall Box with 60.3mm Fixing

Insert Sockets supplied with frames and fixing screws.

Surface plates supplied with fixing screws.

Technical Insert Reference:	Bright Chrome Insert White Surround Product Code:	Bright Chrome Insert Black Surround Product Code:	Satin Chrome Insert White Surround Product Code:	Satin Chrome Insert Black Surround Product Code:	Satin Stainless Insert White Surround Product Code:	
1 gang 13A Double Pole Switched Socket	GSS1	I SS1 BC-W	I SS1 BC-B	I SS1 SC-W	I SS1 SC-B	I SS1 SS-W


Technical Insert Reference:	Satin Stainless Insert Black Surround Product Code:	Polished Brass Insert White Surround Product Code:	Polished Brass Insert Black Surround Product Code:	Satin Brass Insert White Surround Product Code:	Satin Brass Insert Black Surround Product Code:	
1 gang 13A Double Pole Switched Socket	GSS1	I SS1 SS-B	I SS1 PB-W	I SS1 PB-B	I SS1 SB-W	I SS1 SB-B

Technical Insert Reference:	Antique Brass Insert Black Surround Product Code:	Pearl Oyster Insert White Surround Product Code:	Black Nickel Insert Black Surround Product Code:	White Plastic Insert White Surround Product Code:	Black Plastic Insert Black Surround Product Code:	
1 gang 13A Double Pole Switched Socket	GSS1	I SS1 AB-B	I SS1 PO-W	I SS1 BK-B	I SS1 WH-W	I SS1 BL-B

Hamilton GRID-IT Modules

2 gang 13A Socket Insert Modules with attached Fixing Grids

Pack Quantity: 5
Minimum Wall Box Depth: 35 mm
British Standard: BS 1363



Technical Insert Reference:	Bright Chrome Insert White Surround Product Code:	Bright Chrome Insert Black Surround Product Code:	Satin Chrome Insert White Surround Product Code:	
2 gang 13A Double Pole Switched Socket	GSS2	I SS2 BC-W	I SS2 BC-B	I SS2 SC-W



Technical Insert Reference:	Satin Chrome Insert Black Surround Product Code:	Satin Stainless Insert White Surround Product Code:	Satin Stainless Insert Black Surround Product Code:	
2 gang 13A Double Pole Switched Socket	GSS2	I SS2 SC-B	I SS2 SS-W	I SS2 SS-B



Technical Insert Reference:	Polished Brass Insert White Surround Product Code:	Polished Brass Insert Black Surround Product Code:	Satin Brass Insert White Surround Product Code:	
2 gang 13A Double Pole Switched Socket	GSS2	I SS2 PB-W	I SS2 PB-B	I SS2 SB-W



Technical Insert Reference:	Satin Brass Insert Black Surround Product Code:	Antique Brass Insert Black Surround Product Code:	Pearl Oyster Insert White Surround Product Code:	
2 gang 13A Double Pole Switched Socket	GSS2	I SS2 SB-B	I SS2 AB-B	I SS2 PO-W



Technical Insert Reference:	Black Nickel Insert Black Surround Product Code:	White Plastic Insert White Surround Product Code:	Black Plastic Insert Black Surround Product Code:	
2 gang 13A Double Pole Switched Socket	GSS2	I SS2 BK-B	I SS2 WH-W	I SS2 BL-B

Victorian GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



1 gang Aperture Grid Fix Plate
Nominal Plate Size: 88 x 88 mm
Product Code



2 gang Aperture Grid Fix Plate
Nominal Plate Size: 88 x 88 mm
Product Code



3 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 86 mm
Product Code



4 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 86 mm
Product Code




6 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 146 mm
Product Code

Plate Finish	1 gang Aperture Grid Fix Plate Nominal Plate Size: 88 x 88 mm Product Code	2 gang Aperture Grid Fix Plate Nominal Plate Size: 88 x 88 mm Product Code	3 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 86 mm Product Code	4 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 86 mm Product Code	6 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 146 mm Product Code
Bright Chrome 	95 1GP	95 2GP	95 3GP	95 4GP	95 6GP
Satin Chrome 	96 1GP	96 2GP	96 3GP	96 4GP	96 6GP
Polished Brass 	92 1GP	92 2GP	92 3GP	92 4GP	92 6GP
Satin Brass 	94 1GP	94 2GP	94 3GP	94 4GP	94 6GP

Georgian GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



1 gang Aperture Grid Fix Plate
Nominal Plate Size: 88 x 88 mm
Product Code



2 gang Aperture Grid Fix Plate
Nominal Plate Size: 88 x 88 mm
Product Code



3 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 86 mm
Product Code



4 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 86 mm
Product Code



6 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 146 mm
Product Code


Plate Finish	1 gang Aperture Grid Fix Plate Nominal Plate Size: 88 x 88 mm Product Code	2 gang Aperture Grid Fix Plate Nominal Plate Size: 88 x 88 mm Product Code	3 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 86 mm Product Code	4 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 86 mm Product Code	6 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 146 mm Product Code
Polished Brass 	90 1GP	90 2GP	90 3GP	90 4GP	90 6GP

Victorian GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



8 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 146 mm
Product Code



9 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 210 mm
Product Code



12 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 210 mm
Product Code



1 gang 13A Aperture Grid Fix Plate (Grid fitted to insert)
Nominal Plate Size: 88 x 88 mm
Product Code




2 gang 13A Aperture Grid Fix Plate (Grid fitted to insert)
Nominal Plate Size: 146 x 86 mm
Product Code

Plate Finish	8 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 146 mm Product Code	9 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 210 mm Product Code	12 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 210 mm Product Code	1 gang 13A Aperture Grid Fix Plate (Grid fitted to insert) Nominal Plate Size: 88 x 88 mm Product Code	2 gang 13A Aperture Grid Fix Plate (Grid fitted to insert) Nominal Plate Size: 146 x 86 mm Product Code
Bright Chrome 	95 8GP	95 9GP	95 12GP	95 SS1GP	95 SS2GP
Satin Chrome 	96 8GP	96 9GP	96 12GP	96 SS1GP	96 SS2GP
Polished Brass 	92 8GP	92 9GP	92 12GP	92 SS1GP	92 SS2GP
Satin Brass 	94 8GP	94 9GP	94 12GP	94 SS1GP	94 SS2GP

Georgian GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



8 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 146 mm
Product Code



9 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 210 mm
Product Code



12 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 210 mm
Product Code



1 gang 13A Aperture Grid Fix Plate (Grid fitted to insert)
Nominal Plate Size: 88 x 88 mm
Product Code



2 gang 13A Aperture Grid Fix Plate (Grid fitted to insert)
Nominal Plate Size: 146 x 86 mm
Product Code

Plate Finish	8 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 146 mm Product Code	9 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 210 mm Product Code	12 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 210 mm Product Code	1 gang 13A Aperture Grid Fix Plate (Grid fitted to insert) Nominal Plate Size: 88 x 88 mm Product Code	2 gang 13A Aperture Grid Fix Plate (Grid fitted to insert) Nominal Plate Size: 146 x 86 mm Product Code
Polished Brass 	90 8GP	90 9GP	90 12GP	90 SS1GP	90 SS2GP



GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the Grid Fix insert fitted - please see the GRID-IT section for our complete range of inserts.

1 gang Aperture Grid Fix Plate Nominal Plate Size: 88 x 88 mm Product Code	2 gang Aperture Grid Fix Plate Nominal Plate Size: 88 x 88 mm Product Code	3 gang Aperture Grid Fix Plate Nominal Plate Size: 144 x 85 mm Product Code	4 gang Aperture Grid Fix Plate Nominal Plate Size: 144 x 85 mm Product Code	6 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 146 mm Product Code

Plate Finish	70 1GP	70 2GP	70 3GP	70 4GP	70 6GP
Gloss White 					
Bright Chrome 	77 1GP	77 2GP	77 3GP	77 4GP	77 6GP
Satin Chrome 	76 1GP	76 2GP	76 3GP	76 4GP	76 6GP
Polished Brass 	71 1GP	71 2GP	71 3GP	71 4GP	71 6GP
Satin Brass 	72 1GP	72 2GP	72 3GP	72 4GP	72 6GP
Antique Brass 	79 1GP	79 2GP	79 3GP	79 4GP	79 6GP
Bright Stainless 	73 1GP	73 2GP	73 3GP	73 4GP	73 6GP
Satin Stainless Lacquered 	L74 1GP	L74 2GP	L74 3GP	L74 4GP	L74 6GP
Black Nickel 	78 1GP	78 2GP	78 3GP	78 4GP	78 6GP
Pearl Oyster 	7P 1GP	7P 2GP	7P 3GP	7P 4GP	7P 6GP



GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the Grid Fix insert fitted - please see the GRID-IT section for our complete range of inserts.


8 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 146 mm Product Code	9 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 210 mm Product Code	12 gang Aperture Grid Fix Plate Nominal Plate Size: 146 x 210 mm Product Code	1 gang 13A Aperture Grid Fix Plate (Grid supplied with Insert) Nominal Plate Size: 88 x 88 mm Product Code	2 gang 13A Aperture Grid Fix Plate (Grid supplied with Insert) Nominal Plate Size: 144 x 85 mm Product Code

Plate Finish	70 8GP	70 9GP	70 12GP	70 SS1GP	70 SS2GP
Gloss White 					
Bright Chrome 	77 8GP	77 9GP	77 12GP	77 SS1GP	77 SS2GP
Satin Chrome 	76 8GP	76 9GP	76 12GP	76 SS1GP	76 SS2GP
Polished Brass 	71 8GP	71 9GP	71 12GP	71 SS1GP	71 SS2GP
Satin Brass 	72 8GP	72 9GP	72 12GP	72 SS1GP	72 SS2GP
Antique Brass 	79 8GP	79 9GP	79 12GP	79 SS1GP	79 SS2GP
Bright Stainless 	73 8GP	73 9GP	73 12GP	73 SS1GP	73 SS2GP
Satin Stainless Lacquered 	L74 8GP	L74 9GP	L74 12GP	L74 SS1GP	L74 SS2GP
Black Nickel 	78 8GP	78 9GP	78 12GP	78 SS1GP	78 SS2GP
Pearl Oyster 	7P 8GP	7P 9GP	7P 12GP	7P SS1GP	7P SS2GP

Hamilton® Hartland CFX®

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth dependant on GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.

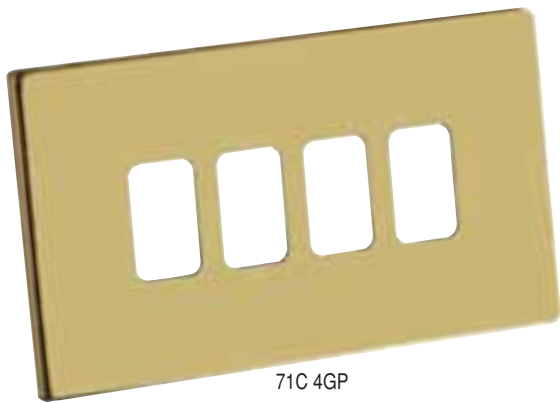

1 gang Aperture Grid Fix Plate

Nom. Plate Size:
86 x 86 mm

Product Code



2 gang Aperture Grid Fix Plate

Nom. Plate Size:
86 x 86 mm

Product Code



3 gang Aperture Grid Fix Plate

Nom. Plate Size:
145 x 86 mm

Product Code



4 gang Aperture Grid Fix Plate

Nom. Plate Size:
145 x 86 mm

Product Code

Plate Finish

Bright Chrome



77C 1GP

77C 2GP

77C 3GP

77C 4GP

Polished Brass



71C 1GP

71C 2GP

71C 3GP

71C 4GP

Satin Brass



72C 1GP

72C 2GP

72C 3GP

72C 4GP

Antique Brass



79C 1GP

79C 2GP

79C 3GP

79C 4GP

Satin Stainless Effect



74C 1GP

74C 2GP

74C 3GP

74C 4GP

Black Nickel



78C 1GP

78C 2GP

78C 3GP

78C 4GP

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.








Plate Colour 7WC 2GP	1 gang Aperture Grid Fix Nom. Plate Size: 86 x 86 mm Product Code	2 gang Aperture Grid Fix Nom. Plate Size: 86 x 86 mm Product Code	3 gang Aperture Grid Fix Nom. Plate Size: 145 x 86 mm Product Code	4 gang Aperture Grid Fix Nom. Plate Size: 145 x 86 mm Product Code
White Plastic 	7WC 1GP	7WC 2GP	7WC 3GP	7WC 4GP
Black Plastic 	7BC 1GP	7BC 2GP	7BC 3GP	7BC 4GP
Red Plastic 	7RC 1GP	7RC 2GP	7RC 3GP	7RC 4GP


Concealed Fixing Blank Plates



LRX BPD BC-N



Single Blank Plate
Nom. Plate Size:
91 x 91 mm
Product Code



Double Blank Plate
Nom. Plate Size:
150 x 91 mm
Product Code

Frame Finish	Plate Finish	Single Blank Plate Nom. Plate Size: 91 x 91 mm Product Code	Double Blank Plate Nom. Plate Size: 150 x 91 mm Product Code
Bright Chrome	Piano Black	LRX BPS BC-N	LRX BPD BC-N

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts..




LRX 2GP BC-N



1 gang Aperture Grid Fix Plate
Nom. Plate Size:
91 x 91 mm
Product Code



2 gang Aperture Grid Fix Plate
Nom. Plate Size:
91 x 91 mm
Product Code



3 gang Aperture Grid Fix Plate
Nom. Plate Size:
150 x 91 mm
Product Code



4 gang Aperture Grid Fix Plate
Nom. Plate Size:
150 x 91 mm
Product Code

Frame Finish	Plate Finish	1 gang Aperture Grid Fix Plate Nom. Plate Size: 91 x 91 mm Product Code	2 gang Aperture Grid Fix Plate Nom. Plate Size: 91 x 91 mm Product Code	3 gang Aperture Grid Fix Plate Nom. Plate Size: 150 x 91 mm Product Code	4 gang Aperture Grid Fix Plate Nom. Plate Size: 150 x 91 mm Product Code
Bright Chrome	Piano Black	LRX 1GP BC-N	LRX 2GP BC-N	LRX 3GP BC-N	LRX 4GP BC-N

Hamilton® Linea-Rondo cfx®







Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



LRX 4GP SN-SS



Frame Finish	Plate Finish	1 gang Aperture Grid Fix Plate	2 gang Aperture Grid Fix Plate	3 gang Aperture Grid Fix Plate	4 gang Aperture Grid Fix Plate
		Nom. Plate Size: 91 x 91 mm Product Code	Nom. Plate Size: 91 x 91 mm Product Code	Nom. Plate Size: 150 x 91 mm Product Code	Nom. Plate Size: 150 x 91 mm Product Code
Bright Chrome 	Bright Steel Satin Steel Polished Brass Black Nickel Piano Black	LRX 1GP BC-BS LRX 1GP BC-SS LRX 1GP BC-PB LRX 1GP BC-BK LRX 1GP BC-N	LRX 2GP BC-BS LRX 2GP BC-SS LRX 2GP BC-PB LRX 2GP BC-BK LRX 2GP BC-N	LRX 3GP BC-BS LRX 3GP BC-SS LRX 3GP BC-PB LRX 3GP BC-BK LRX 3GP BC-N	LRX 4GP BC-BS LRX 4GP BC-SS LRX 4GP BC-PB LRX 4GP BC-BK LRX 4GP BC-N
Polished Brass 	Polished Brass Satin Brass Antique Brass Bright Steel Satin Steel	LRX 1GP PB-PB LRX 1GP PB-SB LRX 1GP PB-AB LRX 1GP PB-BS LRX 1GP PB-SS	LRX 2GP PB-PB LRX 2GP PB-SB LRX 2GP PB-AB LRX 2GP PB-BS LRX 2GP PB-SS	LRX 3GP PB-PB LRX 3GP PB-SB LRX 3GP PB-AB LRX 3GP PB-BS LRX 3GP PB-SS	LRX 4GP PB-PB LRX 4GP PB-SB LRX 4GP PB-AB LRX 4GP PB-BS LRX 4GP PB-SS
Satin Brass 	Satin Brass Satin Steel	LRX 1GP SB-SB LRX 1GP SB-SS	LRX 2GP SB-SB LRX 2GP SB-SS	LRX 3GP SB-SB LRX 3GP SB-SS	LRX 4GP SB-SB LRX 4GP SB-SS
Antique Brass 	Antique Brass Satin Brass	LRX 1GP AB-AB LRX 1GP AB-SB	LRX 2GP AB-AB LRX 2GP AB-SB	LRX 3GP AB-AB LRX 3GP AB-SB	LRX 4GP AB-AB LRX 4GP AB-SB
Satin Nickel 	Bright Steel Satin Steel	LRX 1GP SN-BS LRX 1GP SN-SS	LRX 2GP SN-BS LRX 2GP SN-SS	LRX 3GP SN-BS LRX 3GP SN-SS	LRX 4GP SN-BS LRX 4GP SN-SS
Black Nickel 	Black Nickel Bright Steel Polished Brass	LRX 1GP BK-BK LRX 1GP BK-BS LRX 1GP BK-PB	LRX 2GP BK-BK LRX 2GP BK-BS LRX 2GP BK-PB	LRX 3GP BK-BK LRX 3GP BK-BS LRX 3GP BK-PB	LRX 4GP BK-BK LRX 4GP BK-BS LRX 4GP BK-PB

Hamilton® Linea-Duo CFX®

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



LD 2GP PB-AB



1 gang Aperture Grid Fix Plate

Nom. Plate Size:
86 x 86 mm
Product Code




2 gang Aperture Grid Fix Plate

Nom. Plate Size:
86 x 86 mm
Product Code



3 gang Aperture Grid Fix Plate

Nom. Plate Size:
145 x 86 mm
Product Code



4 gang Aperture Grid Fix Plate

Nom. Plate Size:
145 x 86 mm
Product Code

Frame Finish

Plate Finish

Bright Chrome



Bright Steel
Satin Steel
Polished Brass
Black Nickel
Piano Black

LD 1GP BC-BS
LD 1GP BC-SS
LD 1GP BC-PB
LD 1GP BC-BK
LD 1GP BC-N

LD 2GP BC-BS
LD 2GP BC-SS
LD 2GP BC-PB
LD 2GP BC-BK
LD 2GP BC-N

LD 3GP BC-BS
LD 3GP BC-SS
LD 3GP BC-PB
LD 3GP BC-BK
LD 3GP BC-N

LD 4GP BC-BS
LD 4GP BC-SS
LD 4GP BC-PB
LD 4GP BC-BK
LD 4GP BC-N

Polished Brass



Polished Brass
Satin Brass
Antique Brass
Bright Steel
Satin Steel

LD 1GP PB-PB
LD 1GP PB-SB
LD 1GP PB-AB
LD 1GP PB-BS
LD 1GP PB-SS

LD 2GP PB-PB
LD 2GP PB-SB
LD 2GP PB-AB
LD 2GP PB-BS
LD 2GP PB-SS

LD 3GP PB-PB
LD 3GP PB-SB
LD 3GP PB-AB
LD 3GP PB-BS
LD 3GP PB-SS

LD 4GP PB-PB
LD 4GP PB-SB
LD 4GP PB-AB
LD 4GP PB-BS
LD 4GP PB-SS

Satin Brass



Satin Brass
Satin Steel

LD 1GP SB-SB
LD 1GP SB-SS

LD 2GP SB-SB
LD 2GP SB-SS

LD 3GP SB-SB
LD 3GP SB-SS

LD 4GP SB-SB
LD 4GP SB-SS

Antique Brass



Antique Brass
Satin Brass

LD 1GP AB-AB
LD 1GP AB-SB

LD 2GP AB-AB
LD 2GP AB-SB

LD 3GP AB-AB
LD 3GP AB-SB

LD 4GP AB-AB
LD 4GP AB-SB

Satin Nickel



Bright Steel
Satin Steel

LD 1GP SN-BS
LD 1GP SN-SS

LD 2GP SN-BS
LD 2GP SN-SS

LD 3GP SN-BS
LD 3GP SN-SS

LD 4GP SN-BS
LD 4GP SN-SS

Black Nickel



Black Nickel
Bright Steel
Polished Brass

LD 1GP BK-BK
LD 1GP BK-BS
LD 1GP BK-PB

LD 2GP BK-BK
LD 2GP BK-BS
LD 2GP BK-PB

LD 3GP BK-BK
LD 3GP BK-BS
LD 3GP BK-PB

LD 4GP BK-BK
LD 4GP BK-BS
LD 4GP BK-PB

Hamilton® Linea-Scala CFX®

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



LSX 4GP SN-SS



**1 gang
Aperture
Grid Fix**

Nom. Plate Size:
91 x 91 mm
Product Code




**2 gang
Aperture
Grid Fix**

Nom. Plate Size:
91 x 91 mm
Product Code





**3 gang
Aperture
Grid Fix**

Nom. Plate Size:
150 x 91 mm
Product Code



**4 gang
Aperture
Grid Fix**


Nom. Plate Size:
150 x 91 mm
Product Code

Frame Finish	Plate Finish	1 gang Aperture Grid Fix Nom. Plate Size: 91 x 91 mm Product Code	2 gang Aperture Grid Fix Nom. Plate Size: 91 x 91 mm Product Code	3 gang Aperture Grid Fix Nom. Plate Size: 150 x 91 mm Product Code	4 gang Aperture Grid Fix Nom. Plate Size: 150 x 91 mm Product Code
Bright Chrome 	Bright Steel Satin Steel Polished Brass Black Nickel Piano Black	LSX 1GP BC-BS LSX 1GP BC-SS LSX 1GP BC-PB LSX 1GP BC-BK LSX 1GP BC-N	LSX 2GP BC-BS LSX 2GP BC-SS LSX 2GP BC-PB LSX 2GP BC-BK LSX 2GP BC-N	LSX 3GP BC-BS LSX 3GP BC-SS LSX 3GP BC-PB LSX 3GP BC-BK LSX 3GP BC-N	LSX 4GP BC-BS LSX 4GP BC-SS LSX 4GP BC-PB LSX 4GP BC-BK LSX 4GP BC-N
Polished Brass 	Polished Brass Satin Brass Antique Brass Bright Steel Satin Steel	LSX 1GP PB-PB LSX 1GP PB-SB LSX 1GP PB-AB LSX 1GP PB-BS LSX 1GP PB-SS	LSX 2GP PB-PB LSX 2GP PB-SB LSX 2GP PB-AB LSX 2GP PB-BS LSX 2GP PB-SS	LSX 3GP PB-PB LSX 3GP PB-SB LSX 3GP PB-AB LSX 3GP PB-BS LSX 3GP PB-SS	LSX 4GP PB-PB LSX 4GP PB-SB LSX 4GP PB-AB LSX 4GP PB-BS LSX 4GP PB-SS
Satin Brass 	Satin Brass Satin Steel	LSX 1GP SB-SB LSX 1GP SB-SS	LSX 2GP SB-SB LSX 2GP SB-SS	LSX 3GP SB-SB LSX 3GP SB-SS	LSX 4GP SB-SB LSX 4GP SB-SS
Antique Brass 	Antique Brass Satin Brass	LSX 1GP AB-AB LSX 1GP AB-SB	LSX 2GP AB-AB LSX 2GP AB-SB	LSX 3GP AB-AB LSX 3GP AB-SB	LSX 4GP AB-AB LSX 4GP AB-SB
Satin Nickel 	Bright Steel Satin Steel	LSX 1GP SN-BS LSX 1GP SN-SS	LSX 2GP SN-BS LSX 2GP SN-SS	LSX 3GP SN-BS LSX 3GP SN-SS	LSX 4GP SN-BS LSX 4GP SN-SS
Black Nickel 	Black Nickel Bright Steel Polished Brass	LSX 1GP BK-BK LSX 1GP BK-BS LSX 1GP BK-PB	LSX 2GP BK-BK LSX 2GP BK-BS LSX 2GP BK-PB	LSX 3GP BK-BK LSX 3GP BK-BS LSX 3GP BK-PB	LSX 4GP BK-BK LSX 4GP BK-BS LSX 4GP BK-PB


Hamilton® Linea-Perlina CFX®

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth dependant on GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.

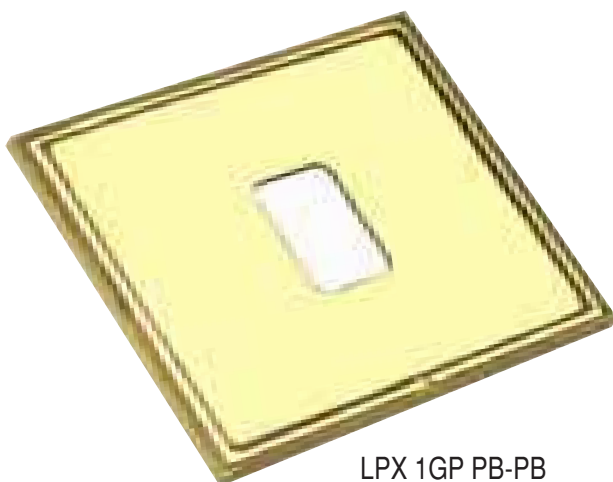


LPX 1GP PB-PB



1 gang Aperture Grid Fix Plate

Nom. Plate Size:
91 x 91 mm


Product Code



2 gang Aperture Grid Fix Plate

Nom. Plate Size:
91 x 91 mm


Product Code



3 gang Aperture Grid Fix Plate

Nom. Plate Size:
150 x 91 mm

Product Code



4 gang Aperture Grid Fix Plate

Nom. Plate Size:
150 x 91 mm


Product Code

Frame Finish

Plate Finish

Polished Brass

Polished Brass
Satin Brass
Antique Brass



LPX 1GP PB-PB
LPX 1GP PB-SB
LPX 1GP PB-AB


LPX 2GP PB-PB
LPX 2GP PB-SB
LPX 2GP PB-AB

LPX 3GP PB-PB
LPX 3GP PB-SB
LPX 3GP PB-AB

LPX 4GP PB-PB
LPX 4GP PB-SB
LPX 4GP PB-AB

Antique Brass

Antique Brass
Polished Brass
Satin Brass




LPX 1GP AB-AB
LPX 1GP AB-PB
LPX 1GP AB-SB

LPX 2GP AB-AB
LPX 2GP AB-PB
LPX 2GP AB-SB

LPX 3GP AB-AB
LPX 3GP AB-PB
LPX 3GP AB-SB

LPX 4GP AB-AB
LPX 4GP AB-PB
LPX 4GP AB-SB




Hamilton® Linea-Georgian CFX®

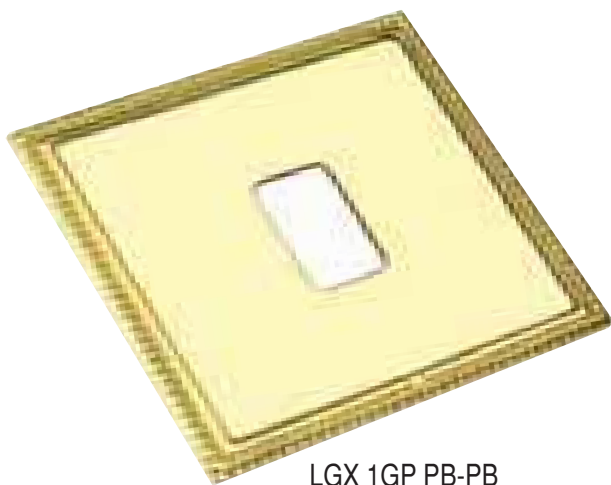

LGX 1GP PB-PB

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth dependant on GRID-IT insert fitted - please see the GRI-IT section for our complete range of inserts.



1 gang Aperture Grid Fix Plate

Nom. Plate Size:
95 x 95 mm

Product Code

2 gang Aperture Grid Fix Plate

Nom. Plate Size:
95 x 95 mm

Product Code

3 gang Aperture Grid Fix Plate

Nom. Plate Size:
154 x 95 mm

Product Code

4 gang Aperture Grid Fix Plate

Nom. Plate Size:
154 x 95 mm

Product Code

Frame Finish

Plate Finish

Polished Brass

Polished Brass

Satin Brass

Antique Brass



LGX 1GP PB-PB
LGX 1GP PB-SB
LGX 1GP PB-AB

LGX 2GP PB-PB
LGX 2GP PB-SB
LGX 2GP PB-AB

LGX 3GP PB-PB
LGX 3GP PB-SB
LGX 3GP PB-AB

LGX 4GP PB-PB
LGX 4GP PB-SB
LGX 4GP PB-AB

Antique Brass

Antique Brass

Polished Brass

Satin Brass



LGX 1GP AB-AB
LGX 1GP AB-PB
LGX 1GP AB-SB

LGX 2GP AB-AB
LGX 2GP AB-PB
LGX 2GP AB-SB

LGX 3GP AB-AB
LGX 3GP AB-PB
LGX 3GP AB-SB




LGX 4GP AB-AB
LGX 4GP AB-PB
LGX 4GP AB-SB

Hamilton® Sheer CFX®

Concealed Fixing GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth dependant on GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.



Plate Finish	 1 gang Aperture Grid Fix Plate Norm. Plate Size: 86 x 86 mm Product Code	 2 gang Aperture Grid Fix Plate Norm. Plate Size: 86 x 86 mm Product Code	 3 gang Aperture Grid Fix Plate Norm. Plate Size: 145 x 86 mm Product Code	 4 gang Aperture Grid Fix Plate Norm. Plate Size: 145 x 86 mm Product Code
Bright Chrome 	87C 1GP	87C 2GP	87C 3GP	87C 4GP
Polished Brass 	81C 1GP	81C 2GP	81C 3GP	81C 4GP
Satin Brass 	82C 1GP	82C 2GP	82C 3GP	82C 4GP
Antique Brass 	89C 1GP	89C 2GP	89C 3GP	89C 4GP
Satin Stainless 	84C 1GP	84C 2GP	84C 3GP	84C 4GP
Black Nickel 	88C 1GP	88C 2GP	88C 3GP	88C 4GP

GRID-IT Grid Fix Plates complete with Fixing Grid

Minimum Wall Box Depth is dependent on the Grid Fix insert fitted - please see the GRID-IT section for our complete range of inserts.



88 6GP



1 gang Aperture Grid Fix Plate
Nominal Plate Size: 86 x 86 mm
Product Code



2 gang Aperture Grid Fix Plate
Nominal Plate Size: 86 x 86 mm
Product Code













3 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 86 mm
Product Code



4 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 86 mm
Product Code



6 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 146 mm
Product Code

Plate Finish	1 gang Aperture Grid Fix Plate	2 gang Aperture Grid Fix Plate	3 gang Aperture Grid Fix Plate	4 gang Aperture Grid Fix Plate	6 gang Aperture Grid Fix Plate
Gloss White 	80 1GP	80 2GP	80 3GP	80 4GP	80 6GP
Bright Chrome 	87 1GP	87 2GP	87 3GP	87 4GP	87 6GP
Satin Chrome 	86 1GP	86 2GP	86 3GP	86 4GP	86 6GP
Polished Brass 	81 1GP	81 2GP	81 3GP	81 4GP	81 6GP
Satin Brass 	82 1GP	82 2GP	82 3GP	82 4GP	82 6GP
Antique Brass 	89 1GP	89 2GP	89 3GP	89 4GP	89 6GP
Bright Stainless 	83 1GP	83 2GP	83 3GP	83 4GP	83 6GP
Satin Stainless Lacquered 	L84 1GP	L84 2GP	L84 3GP	L84 4GP	L84 6GP
Black Nickel 	88 1GP	88 2GP	88 3GP	88 4GP	88 6GP
Pearl Oyster 	8P 1GP	8P 2GP	8P 3GP	8P 4GP	8P 6GP

GRID-IT Grid Fix Plates complete with Fixing Grid


Minimum Wall Box Depth is dependent on the Grid Fix insert fitted - please see the GRID-IT section for our complete range of inserts.




82 9GP



8 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 146 mm
Product Code



9 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 210 mm
Product Code













12 gang Aperture Grid Fix Plate
Nominal Plate Size: 146 x 210 mm
Product Code




1 gang 13A Aperture Grid Fix Plate (Grid supplied with Insert)
Nominal Plate Size: 86 x 86 mm
Product Code




2 gang 13A Aperture Grid Fix Plate (Grid supplied with Insert)
Nominal Plate Size: 146 x 86 mm
Product Code

Plate Finish	8 gang Aperture Grid Fix Plate	9 gang Aperture Grid Fix Plate	12 gang Aperture Grid Fix Plate	1 gang 13A Aperture Grid Fix Plate (Grid supplied with Insert)	2 gang 13A Aperture Grid Fix Plate (Grid supplied with Insert)
Gloss White 	80 8GP	80 9GP	80 12GP	80 SS1GP	80 SS2GP
Bright Chrome 	87 8GP	87 9GP	87 12GP	87 SS1GP	87 SS2GP
Satin Chrome 	86 8GP	86 9GP	86 12GP	86 SS1GP	86 SS2GP
Polished Brass 	81 8GP	81 9GP	81 12GP	81 SS1GP	81 SS2GP
Satin Brass 	82 8GP	82 9GP	82 12GP	82 SS1GP	82 SS2GP
Antique Brass 	89 8GP	89 9GP	89 12GP	89 SS1GP	89 SS2GP
Bright Stainless 	83 8GP	83 9GP	83 12GP	83 SS1GP	83 SS2GP
Satin Stainless Lacquered 	L84 8GP	L84 9GP	L84 12GP	L84 SS1GP	L84 SS2GP
Black Nickel 	88 8GP	88 9GP	88 12GP	88 SS1GP	88 SS2GP
Pearl Oyster 	8P 8GP	8P 9GP	8P 12GP	8P SS1GP	8P SS2GP


Hamilton[®] Perception CFX[®]

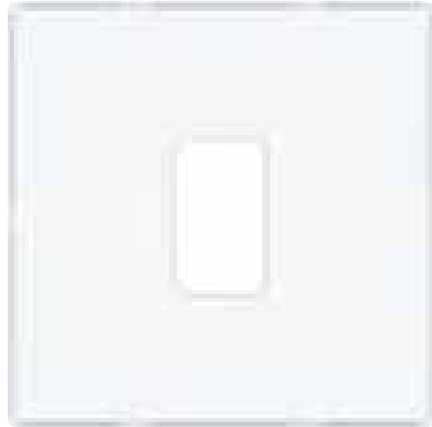

PC 1GP

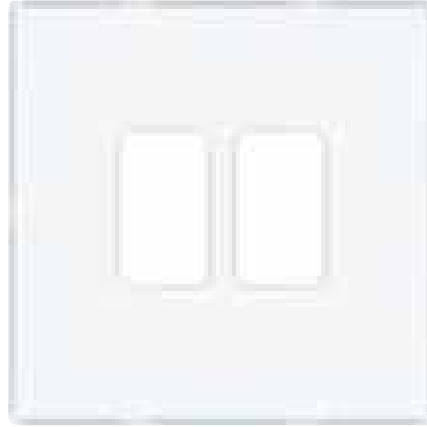






PC 2GP

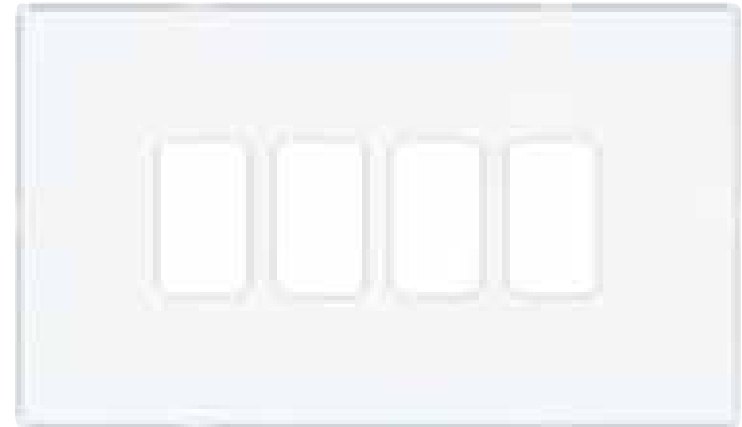

PC 4GP

Concealed Fixing GRID-FIX Transparent Plates complete with Fixing Grid

Minimum Wall Box Depth is dependant on GRID-IT insert fitted - please see the GRID-IT section for our complete range of inserts.

	 1 gang Aperture Grid Fix Plate Nom. Plate Size: 86 x 86 mm Product Code	 2 gang Aperture Grid Fix Plate Nom. Plate Size: 86 x 86 mm Product Code	 3 gang Aperture Grid Fix Plate Nom. Plate Size: 146 x 86 mm Product Code	 4 gang Aperture Grid Fix Plate Nom. Plate Size: 146 x 86 mm Product Code
Transparent Plate				
GRID-FIX Plates	PC 1GP	PC 2GP	PC 3GP	PC 4GP
				

Hamilton Technical Specification

ROCKER SWITCHES/KEY SWITCHES

CATEGORY:

10AX ROCKER SWITCH

Current Rating: 10AX
Max Load: 10 Amp inductive

Technical Insert Ref: Description:

R21	1 gang 10AX 2 way Rocker
R22	2 gang 10AX 2 way Rocker
R23	3 gang 10AX 2 way Rocker
R24	4 gang 10AX 2 way Rocker
R26	6 gang 10AX 2 way Rocker
R31	1 gang 10AX Intermediate Rocker
R32	2 gang 10AX Intermediate Rocker
RRT	1 gang 10AX Push to Make Retractive Rocker
GRRT	1 gang 10AX PTM/PTB Retractive Rocker

GRID-IT 10AX ROCKER SWITCH MODULES

GRR2W	1 gang 10AX Retractive 2 way and Off Rocker
GR21	1 gang 10AX 2 way Rocker
GRRT	1 gang 10AX PTM/PTB Retractive Rocker

GRID-IT 20AX ROCKER SWITCH MODULES

Current Rating: 20AX
Max Load: 20 Amp inductive

GR2WO	1 gang 20AX Non-Retractive 2 way & Off Rocker
GR212	1 gang 20AX 2 way Rocker
GR312	1 gang 20AX Intermediate Rocker

20AX ROCKER SWITCH

Current Rating: 20AX
Max Load: 20 Amp inductive

Technical Insert Ref: Description:

R212	1 gang 20AX 2 way Rocker
R222	2 gang 20AX 2 way Rocker
R232	3 gang 20AX 2 way Rocker
R242	4 gang 20AX 2 way Rocker
R312	1 gang 20AX Intermediate Rocker
R322	2 gang 20AX Intermediate Rocker

20AX KEY SWITCH

K21	1 gang 20AX 2 way Key Switch
KEL	1 gang 20AX 2 way Key Switch "EMG LTG TEST"

GRID-IT 20AX KEY SWITCH MODULE

GK21	1 gang 20AX 2 way Key Switch
GKEL	1 gang 20AX 2 way Key Switch "EMG LTG TEST"

Note: For Double Pole Key Switch please see the Double Pole Switch page.

TECHNICAL SPECIFICATION:

Voltage: 220/250V AC
IP Rating: IP2XD
Switched Poles: Single
Contact Gap Minimum: 3mm
Product Class 1: Must be earthed
GRID-IT Product Class 1: Face plate must be earthed

Ambient Operating Temperature: -5 to +40 C
Location: Internal Use Only
Max Installation Altitude: 2000m

STANDARDS:

BS EN ISO Standard: BS EN 60669-1

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity 10AX	5	4	1	1	1
Earth Terminal Capacity 10AX	5	4	3	1	1
Terminal Capacity 20AX	5	4	2	2	1
Earth Terminal Capacity 20AX	6	5	3	2	1

Fixing Centres:

2 WAY ROCKER

INTERMEDIATE ROCKER


PUSH TO MAKE ROCKER

KEY SWITCH


60.3mm



120.6mm



GRID-IT SWITCH INSERTS Fits 1 Grid-IT aperture

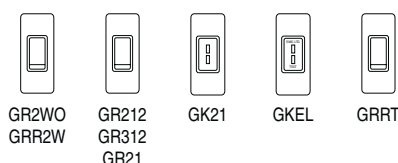

Hamilton Technical Specification

DOUBLE POLE ROCKER SWITCHES/KEY SWITCHES

CATEGORY:

20AX DOUBLE POLE ROCKER SWITCH

Current Rating: 20AX
Max Load: 20 Amp inductive

Technical Insert Ref: Description:

DP 1 gang 20AX Double Pole Rocker
 DPN 1 gang 20AX Double Pole Rocker + Neon
 DPNC 1 gang 20AX Double Pole Rocker + Neon
 + Cable Outlet

45 AMP DOUBLE POLE ROCKER SWITCH

Current Rating: 45 Amp
Max Load: 45 Amp

Technical Insert Ref: Description:

45 1 gang 45A Double Pole Red Rocker
 45N 1 gang 45A Double Pole Red Rocker + Neon
 45V 1 gang 45A Double Pole Red Rocker + Neon,
 Vertically Mounted

GRID-IT 20AX DOUBLE POLE ROCKER SWITCH MODULE

GDP 1 gang 20AX Double Pole Rocker

GRID-IT 20AX DP KEY SWITCH MODULE

GKDP 20AX Double Pole Key Switch

45 AMP ROCKER SWITCH WITH 13AMP SOCKET

Current Rating: Switch 45 Amp/Socket 13 Amp
Max Load: Switch 45 Amp/Socket 13 Amp

Technical Insert Ref: Description:

45SS1 1 gang 45A Double Pole Red Rocker +
 Neon + 13A Switched Socket

TECHNICAL SPECIFICATION:

Voltage: 220/250V AC
IP Rating: IP2XD
Switched Poles: Double
Contact Gap Minimum: 3mm
Product Class 1: Must be earthed
GRID-IT Product Class 1: Face plate must
 be earthed
Ambient Operating Temperature: -5 to +40 C

Location: Internal Use Only
Max Installation Altitude: 2000m

STANDARDS:

BS EN ISO Standard:
 20AX/45Amp Double Pole Rocker BS EN 60669-1
 Double Pole Rocker with Socket BS 4177


TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²	10mm ²	16mm ²
20AX Terminal Capacity			3	2	1		
20AX Earth Terminal Capacity	6	5	3	2	1		
45Amp Terminal Capacity					3	2	1
45Amp Earth Terminal Capacity					3	2	1
GDP/GKDP Terminal Capacity	5	4	2	1	1		
GDP/GKDP Earth Terminal Capacity	6	5	3	2	1		


Fixing Centres:

60.3mm
DPNC Cable Outlet
Size: Min 0.75mm²
 Max 2.5mm²


20AMP DP ROCKER SWITCH




45AMP DP ROCKER SWITCH



GRID-IT MODULE Fits 1 Grid-IT aperture




120.6mm



45V
 Vertically mounted

DP ROCKER WITH SOCKET



45SS1

Hamilton Technical Specification

SWITCHED SOCKETS

CATEGORY:

SWITCHED SOCKETS

Technical Insert Ref: Description:

SS1	1 gang 13A Double Pole Switched Socket
SS2	2 gang 13A Double Pole Switched Socket

GRID-IT SWITCHED SOCKETS MODULES

Technical Insert Ref: Description:

GSS1	1 gang 13A Double Pole Switched Socket
GSS2	2 gang 13A Double Pole Switched Socket

TECHNICAL SPECIFICATION:

Current Rating:	13 Amp
Voltage:	220/250V AC
IP Rating:	IP2XD
Max Load:	13 Amp
Switched Poles:	Double
Contact Gap Minimum:	3mm
Product Class 1:	Must be earthed
GRID-IT Product Class 1:	Face plate must be earthed

Ambient Operating Temperature:	-5 to +40 C
Location:	Internal Use Only
Max Installation Altitude:	2000m

STANDARDS:

BS EN ISO Standard:	BS 1363-2 Inc. amendment 1,2,3
ASTA Licence No:	1046 (Box fix only)

TERMINAL CAPACITY:

	2.5mm ²	4mm ²	6mm ² Multi-Strand	10mm ²
Terminal Capacity	4	3	2	1
Earth Terminal Capacity	4	3	2	1

Fixing Centres:


13A SWITCHED SOCKETS

60.3mm



SS1

120.6mm



SS2

Fixing Centres:


GRID-IT SWITCHED SOCKETS MODULES

60.3mm grid to wall box
49.2mm plate to grid



GSS1

120.6mm grid to wall box
106.5mm plate to grid



GSS2

Hamilton Technical Specification

CONNECTION UNITS

CATEGORY:

SWITCHED FUSED CONNECTION UNIT

Technical Insert Ref: Description:

SP	1 gang 13A Double Pole Fused Spur
SPN	1 gang 13A DP Fused Spur + Neon
SPNC	1 gang 13A DP Fused Spur + Neon + Cable Outlet

13A FUSE WITH RED NEON HALO

FN	1 gang 13A Fuse with Red Neon Halo
----	------------------------------------

GRID-IT 13A FUSE WITH NEON HALO MODULE

GFN	13A Fuse with Neon Halo
-----	-------------------------

CABLE OUTLET

Current Rating: 20 Amp
Max Load: 20 Amp
Switched Poles: None
Contact Gap Min: None

Technical Insert Ref: Description:

CO	Cable Outlet
----	--------------

GRID-IT CABLE OUTLET MODULE

GC20	Cable Outlet
------	--------------

UNSWITCHED CONNECTION UNIT

Switched Poles: None
Contact Gap Min: None

Technical Insert Ref: Description:

FO	1 gang 13A Fuse Only
FOC	1 gang 13A Fuse + Cable Outlet

TECHNICAL SPECIFICATION:

Current Rating: 13 Amp
Voltage: 220/250V AC
Max Load: 13 Amp
IP Rating: IP2XD
Switched Poles (SP, SPN, SPNC): Double
Contact Gap Minimum: 3mm
Product Class 1: Must be earthed
Grid-IT Product Class 1: Face plate must be earthed
Ambient Operating Temperature: -5 to +40 C

Cable Outlet Size Flexible: Min 0.75mm²
 Max 2.5mm²
Location: Internal Use Only
Max Installation Altitude: 2000m

STANDARDS:

BS EN ISO Standard:
 Switched Fuse/Unswitched BS 1363-4
 Fuse with halo BS 5733
 Fuse with halo + fuselink BS 5733 and BS1362
 Cable outlet BS 5733

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Switched/Fuse + Halo Terminal Capacity			3	2	1
Switched/Fuse + Halo Earth Terminal Capacity	6	5	3	2	1
Cable Outlet Terminal Capacity	5	4	2	2	
Cable Outlet Earth Terminal Capacity	6	5	3	2	1
FO/FOC Terminal Capacity	5	4	3	1	1
FO/FOC Earth Terminal Capacity	6	5	3	2	1

Fixing Centres:





SWITCHED FUSE

FUSE WITH HALO


CABLE OUTLET

FUSE UNIT

60.3mm



Fits one Grid-IT aperture



Hamilton Technical Specification

LEADING EDGE DIMMER INFORMATION

NOTES FOR DIMMERS

Note A	Tungsten filament GU10 lamps must be branded with a fuse base.
Note B	When using mains voltage halogen lamps - dimmers should be de-rated by 25%.
Note C	When using mains voltage halogen load transformers - maximum rating is 210VA.
Note D	To only be used with Touch Master Dimmers.
Note E	When dimming LED lamps de-rated by 75% - please contact our Technical Department for compatibility.

Leading Edge Resistive Dimmers - METAL PLATES								
Number of dimmer switches per plate	Nominal plate size mm	Dimmer type	Max plate load W (Watts)	Lamp type				
				Tungsten Filament including halogen		Linea Halogen	GU10 LED	
				Min	Max	Max	Min	Max
1	88x88	1 x 40	400	40	400	300	10	100
2	88x88	2 x 40	600	40	300	300	10	100
3	88x146	3 x 40	1200	40	400	300	10	100
4	88x146	4 x 40	1200	40	300	250	10	100
6	150x150	6 x 40	1800	40	300	250	10	100
8	150x150	8 x 40	1800	40	300	250	10	100
9	150x210	9 x 40	2250	40	250	250	10	100
12	150x210	12 x 40	2250	40	200	150	10	100
12	210x280	12 x 40	3600	40	300	200	10	100
16	210x280	16 x 40	3600	40	225	200	10	100
1	88x88	1 x 60	600	100	600	450	15	150
1	88x146	1 x 1K	1000	150	1000	750	25	250

Leading Edge Resistive Dimmers - WOOD PLATES								
Number of dimmer switches per plate	Nominal plate size mm	Dimmer type	Max plate load W (Watts)	Lamp type				
				Tungsten Filament including halogen		Linea Halogen	GU10 LED	
				Min	Max	Max	Min	Max
1	88x88	1 x 40	400	40	400	300	10	100
2	88x146	2 x 40	600	40	300	300	10	100
3	88x146	3 x 40	900	40	300	300	10	100
4	88x146	4 x 40	1000	40	250	200	10	100
6	150x150	6 x 40	1200	40	200	200	10	100
9	150x210	9 x 40	1800	40	200	200	10	100

Leading Edge Resistive Dimmers - PLASTIC PLATES								
Number of dimmer switches per plate	Nominal plate size mm	Dimmer type	Max plate load W (Watts)	Lamp type				
				Tungsten Filament including halogen		Linea Halogen	GU10 LED	
				Min	Max	Max	Min	Max
1	88x88	1 x 40	400	40	400	300	10	100
2	88x88	2 x 40	600	40	300	300	10	100
3	88x146	3 x 40	900	40	300	300	10	100
4	88x146	4 x 40	1000	40	250	250	10	100

Hamilton Technical Specification

LEADING EDGE INDUCTIVE PUSH ON/OFF DIMMERS

CATEGORY:

200VA INDUCTIVE DIMMER

See Notes for Dimmers: Note E

Wattage: 200VA (low voltage) per gang
Current Rating: 0.8 Amp
Max Load: 200VA (low voltage) per gang
Min Load: 25VA

Technical Insert Ref: Description:

1X2V 1 gang 200VA 2 way
 2X2V 2 gang 200VA 2 way

GRID-IT 200VA INDUCTIVE DIMMER MODULE

See Notes for Dimmers: Note E

1X2V 1 gang 200VA 2 way

300VA INDUCTIVE DIMMER

See Notes for Dimmers: Note E

Wattage: 300VA (low voltage)
Current Rating: 1.25 Amp
Max Load: 300VA (low voltage)
Min Load: 50VA

Technical Insert Ref: Description:

1X3V 1gang 300VA 2 way

TECHNICAL SPECIFICATION:




Voltage: 220/250V AC
IP Rating: IP2XD
Switched Poles: Single
Contact Gap Minimum: None

Product Class 1: Face plate must be earthed
Ambient Operating Temperature: -5 to +40 C
Location: Internal Use Only
Max Installation Altitude: 2000m

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
200VA Terminal Capacity	2	2			
200VA Earth Terminal Capacity	5	4	3	1	1
300VA Terminal Capacity	2	2			
300VA Earth Terminal Capacity	5	4	3	1	1

LEADING EDGE TECHNOLOGY DIMMERS for use with low voltage toroidal transformers and some LED lamps.

Fixing Centres:	200VA INDUCTIVE DIMMER	300VA INDUCTIVE DIMMER	GRID-IT INDUCTIVE DIMMER MODULE
60.3mm	 <p>1X2V 2X2V</p>	 <p>1X3V</p>	 <p>1X2V</p>

Note: It is recommended to contact the manufacturer of the transformer to confirm that it is dimmable and is considered to be an inductive load.

Hamilton Technical Specification

LEADING EDGE PUSH ON/OFF RESISTIVE DIMMERS

CATEGORY:

400W PUSH ON/OFF RESISTIVE DIMMER

See Notes for Dimmers: Note A,B,E

Wattage: 400W
Current Rating: 1.66 Amp
Max Load: 400W Resistive per gang

Technical Insert Ref: Description:

1X40	1 gang 400W 2 Way
2X40	2 gang 400W 2 Way, max 300W per gang
3X40	3 gang 400W 2 Way
4X40	4 gang 400W 2 Way, max 300W per gang
WD2X40	2 gang 400W 2 way, max 300W per gang
W3X40	3 gang 400W 2 way, max 300W per gang
W4X40	4 gang 400W 2 way, max 250W per gang
P3X40	3 gang 400W 2 way, max 300W per gang
P4X40	4 gang 400W 2 way, max 250W per gang

GRID-IT 400W PUSH ON/OFF RESISTIVE DIMMER MODULE

See Notes for Dimmers: Note A,B,E

D40	1 gang 400W 2 way Switched Poles: not applicable* Contact Gap Minimum: 3mm**
-----	--

600W PUSH ON/OFF RESISTIVE DIMMER

See Notes for Dimmers: Note A,B,E

Wattage: 600W
Current Rating: 2.5 Amp
Max Load: 600W Resistive per gang

Technical Insert Ref: Description:

1X60	1 gang 600W 2 Way
WD1X60	1 gang 600W 2 Way

1KW PUSH ON/OFF RESISTIVE DIMMER

See Notes for Dimmers: Note A,B,E

Wattage: 1KW
Current Rating: 4.16 Amp
Max Load: 1KW Resistive per gang

Technical Insert Ref: Description:

1X1K	1 gang 1000W 2 Way
------	--------------------

TECHNICAL SPECIFICATION:

Voltage: 220/250V AC
IP Rating: IP2XD
Switched Poles: Single*
Contact Gap Minimum: N/A**
Product Class 1: Face plate must be earthed
Ambient Operating Temperature: -5 to +40 C



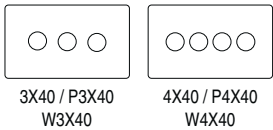



Location: Internal Use Only
Max Installation Altitude: 2000m

STANDARDS:

BS EN ISO Standard: 400W/600W Resistive Dimmer BS EN 60669-2-1

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	2	2			
Earth Terminal Capacity	5	4	3	1	1

Fixing Centres:	400W PUSH ON/OFF DIMMER	600W PUSH ON/OFF DIMMER	1KW PUSH ON/OFF DIMMER	GRID-IT 400W PUSH ON/OFF DIMMER MODULE
60.3mm	 <p>1X40 2X40</p>	 <p>1X60</p>		
120.6mm	 <p>3X40 / P3X40 / W3X40 4X40 / P4X40 / W4X40</p>		 <p>1X1K</p>	
	 <p>WD2X40 Woods range</p>			
Fits one Grid-IT aperture				 <p>D40</p>

Hamilton Technical Specification

TRAILING EDGE DIMMER INFORMATION

NOTES FOR DIMMERS

Note A	Tungsten filament GU10 lamps must be branded with a fuse base.
Note B	When using mains voltage halogen lamps - dimmers should be de-rated by 25%.
Note C	When using mains voltage halogen load transformers - maximum rating is 210VA.
Note D	To only be used with Touch Master Dimmers.
Note E	When dimming LED lamps de-rated by 75% - please contact our Technical Department for compatibility.

Trailing Edge Resistive Dimmers - METAL PLATES								
Number of dimmer switches per plate	Nominal plate size mm	Dimmer type	Max plate load W (Watts)	Lamp type				
				Tungsten Filament including Halogen		Linea Halogen	GU10 LED	
				Min	Max	Max	Min	Max
1	88x88	1XTE, 1XTM	250	25	250	200	7	62
2	88x88	2XTE, 2XTM	500	25	250	200	7	62
3	88x146	3XTE, 3XTM	750	25	250	200	7	62
4	88x146	4XTE, 4XTM	1000	25	250	200	7	62
6	150x150	6XTE, 6XTM	1500	25	250	200	7	62
8	150x150	8XTE, 8XTM	1800	25	225	200	7	62
9	150x210	9XTE, 9XTM	2250	25	250	200	7	62
12	150x210	12XTE, 12XTM	2250	25	200	200	7	62
12	210x280	12XTE, 12XTM	3000	25	250	200	7	62
16	210x280	16XTE, 16XTM	3600	25	225	200	7	62

Trailing Edge Resistive Dimmers - WOOD PLATES								
Number of dimmer switches per plate	Nominal plate size mm	Dimmer type	Max plate load W (Watts)	Lamp type				
				Tungsten Filament including Halogen		Linea Halogen	GU10 LED	
				Min	Max	Max	Min	Max
1	88x88	1XTE	250	25	250	200	7	62
2	88x88	2XTE	400	25	200	200	7	62
3	88x146	3XTE	750	25	250	150	7	62
4	88x146	4XTE	800	25	200	150	7	62
6	150x150	6XTE	1200	25	200	150	7	62
8	150x150	8XTE	1600	25	200	150	7	62
9	150x210	9XTE	1800	25	200	150	7	62
12	150x210	12XTE	2250	25	200	150	7	62

Trailing Edge Resistive Dimmers - PLASTIC PLATES								
Number of dimmer switches per plate	Nominal plate size mm	Dimmer type	Max plate load W (Watts)	Lamp type				
				Tungsten Filament including Halogen		Linea Halogen	GU10 LED	
				Min	Max	Max	Min	Max
1	88x88	1XTE, 1XTM	250	25	250	200	7	62
2	88x88	2XTE, 2XTM	500	25	250	200	7	62
3	88x146	3XTE, 3XTM	750	25	250	150	7	62
4	88x146	4XTE, 4XTM	1000	25	250	150	7	62

Hamilton Technical Specification

TRAILING EDGE PUSH ON/OFF DIMMERS

CATEGORY:

TRAILING EDGE DIMMER

See Notes for Dimmers: Note A,B, C, E

Technical Insert Ref: Description:

1XTE	1 gang 250W/210VA Multi-Way Dimmer
2XTE	2 gang 250W/210VA Multi-Way Dimmer
3XTE	3 gang 250W/210VA Multi-Way Dimmer
4XTE	4 gang 250W/210VA Multi-Way Dimmer
W2XTE	2 gang 250W/210VA Multi-Way Dimmer max 200W per gang
W4XTE	4 gang 250W/210VA Multi-Way Dimmer max 200W per gang

GRID-IT TRAILING EDGE DIMMER MODULE

See Notes for Dimmers: Note A,B, C, E

Technical Insert Ref: Description:

DTE	1 gang 250W/210VA Multi-Way Dimmer Module
-----	--

TECHNICAL SPECIFICATION:

Wattage:	250W Resistive 210VA Inductive
Current Rating:	1.1 Amp per gang
Max Load:	250W Resistive 210VA Inductive
Minimum Load:	25W/25VA
Voltage:	220/250V AC
IP Rating:	IP2XD
Switched Poles:	Single

Contact Gap Minimum:	None
Product Class 1:	Face plate must be earthed
Ambient Operating Temperature:	-5 to +40 C
Location:	Internal Use Only
Max Installation Altitude:	2000m

STANDARDS:






BS EN ISO Standard:	BS EN 60669-2-1
----------------------------	-----------------

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	2	2			
Earth Terminal Capacity	5	4	3	1	1

TRAILING EDGE TECHNOLOGY DIMMERS. Are suitable for control of both resistive and inductive loads. When used for dimming low voltage electronic halogen transformers it must be noted that the dimmer controls the primary side of the transformer.

Fixing Centres: TRAILING EDGE DIMMER GRID-IT TRAILING EDGE DIMMER MODULES

60.3mm	 1XTE	 2XTE W2XTE	Fits one Grid-IT aperture	 DTE
120.6mm	 3XTE	 4XTE W4XTE		

Note: For multi-way switching a push to make retractive switch should be installed in the other positions. (Note: standard two way switches will not work with this product).

Hamilton Technical Specification

TRAILING EDGE TOUCH DIMMERS

CATEGORY:

TRAILING EDGE TOUCH MASTER MULTI-WAY DIMMER

See Notes for Dimmers: Note A,B,C,E

Technical Insert Ref: Description:

1XTM	1 gang 250W/210VA Multi-Way Touch Master
2XTM	2 gang 250W/210VA Multi-Way Touch Master
3XTM	3 gang 250W/210VA Multi-Way Touch Master
4XTM	4 gang 250W/210VA Multi-Way Touch Master

GRID-IT TOUCH MASTER MULTI-WAY DIMMER MODULE

See Notes for Dimmers: Note A,B,C,E

DTM	1 gang Multi-Way Touch Master Module
-----	--------------------------------------

TOUCH SLAVE CONTROLLER

See Notes for Dimmers: Note A,B,C,D

Technical Insert Ref: Description:

1XTS	1 gang 250W/VA Multi-Way Touch Slave
2XTS	2 gang 250W/VA Multi-Way Touch Slave
3XTS	3 gang 250W/VA Multi-Way Touch Slave
4XTS	4 gang 250W/VA Multi-Way Touch Slave

GRID-IT TOUCH SLAVE CONTROLLER MODULE

See Notes for Dimmers: Note A,B,C,D

DTS	1 gang Multi-Way Touch Slave Controller Module
-----	--

Touch slave controllers to be used only with touch master dimmers.

TECHNICAL SPECIFICATION:

Wattage:	250W Resistive 210VA Inductive
Current Rating:	1.1 Amps
Max Load:	250W Resistive 210VA Inductive
Minimum Load:	25W/VA
Voltage:	220/250V AC
IP Rating:	IP2XD
Product Class 1:	Face plate must be earthed

Ambient Operating Temperature:	-5 to +40 C
Location:	Internal Use Only
Max Installation Altitude:	2000m

STANDARDS:

BS EN ISO Standard:	BS EN 60669-2-1
----------------------------	-----------------

TERMINAL CAPACITY:



	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	2	2			
Earth Terminal Capacity	5	4	3	1	1

Fixing Centres:



TOUCH MASTER DIMMER

TOUCH SLAVE CONTROLLER

60.3mm



120.6mm



GRID-IT TOUCH MASTER DIMMER MODULE

GRID-IT TOUCH SLAVE CONTROLLER MODULE

Fits 1 Grid-IT aperture



Hamilton Technical Specification

PUSH ON/OFF SWITCHES AND BALLAST CONTROLLER

CATEGORY:

WHITE PLASTIC PUSH ON/OFF SWITCH

Current Rating:	5 Amps
Voltage:	230/240V AC
Technical Insert Ref:	Description:
1X5A	1 gang 5A Push On/Off Switch
2X5A	2 gang 5A Push On/Off Switch
3X5A	3 gang 5A Push On/Off Switch
4X5A	4 gang 5A Push On/Off Switch

GRID-IT PUSH ON/OFF SWITCH MODULES

Current Rating:	3 Amps
Technical Insert Ref:	Description:
DIP	3A Intermediate Push On/Off Module
Current Rating:	6 Amps
DPS	6A 2 way Push On/Off Switch Module

GRID-IT HIGH FREQUENCY BALLAST CONTROL MODULE

Current Rating:	1-10V
Technical Insert Ref:	Description:
DHF	1-10DC High Frequency Ballast Control Module (No Off)

Note: Normally used in conjunction with Hamilton 10 or 20amp rocker switch. The 1-10v module will not switch mains voltage. It is designed to control a 1-10volt signal only.

TECHNICAL SPECIFICATION:

Voltage:	220/250V AC
IP Rating:	IP2XD
Contact Gap Minimum:	3mm
Product Class 1:	Face plate must be earthed
Ambient Operating Temperature:	-5 to +40 C





Location:	Internal Use Only
Max Installation Altitude:	2000m

STANDARDS:

BS EN ISO Standard:	BS EN 60669-1
Push on/off switch	

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	2	2			
Earth Terminal Capacity	5	4	3	1	1

Fixing Centres:	PUSH ON/OFF SWITCH	GRID-IT PUSH ON/OFF SWITCH MODULE	GRID-IT HIGH FREQUENCY BALLAST CONTROL MODULE
60.3mm	 <p>1X5A 2X5A</p>	<p>Fits 1 Grid-IT aperture</p>  <p>DIP /DPS</p>	 <p>DHF</p>
120.6mm	 <p>3X5A 4X5A</p>		

Hamilton Technical Specification

GRID-IT NEON AND NEON HALO MODULES

CATEGORY:

GRID-IT NEON HALO MODULES

Technical Insert Ref:	Description:
GN	Neon Modules

GRID-IT NEON ONLY MODULES

Technical Insert Ref:	Description:
GNO	Neon Only Modules

TECHNICAL SPECIFICATION:

Voltage:	220/250V AC
IP Rating:	IP2XD
Product Class 1:	Face plate must be earthed
Ambient Operating Temperature:	-5 to +40 C
Location:	Internal Use Only
Max Installation Altitude:	2000m

STANDARDS:

BS EN ISO Standard:	BS 5733
----------------------------	---------

TERMINAL CAPACITY:

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	5	4	2	2	1
Earth Terminal Capacity	6	5	3	2	1

GRID-IT NEON HALO MODULES

Fits 1 Grid-IT aperture



GRID-IT NEON ONLY MODULES







Hamilton Technical Specification

LARGE PLATES DIMENSIONS

Note: Large plastic not available in Perception CFX®, Hartland Colours CFX®. White Plastic.

Note: You can mix 'n' match dimmers as long as you don't go over the maximum wattage for the plate.

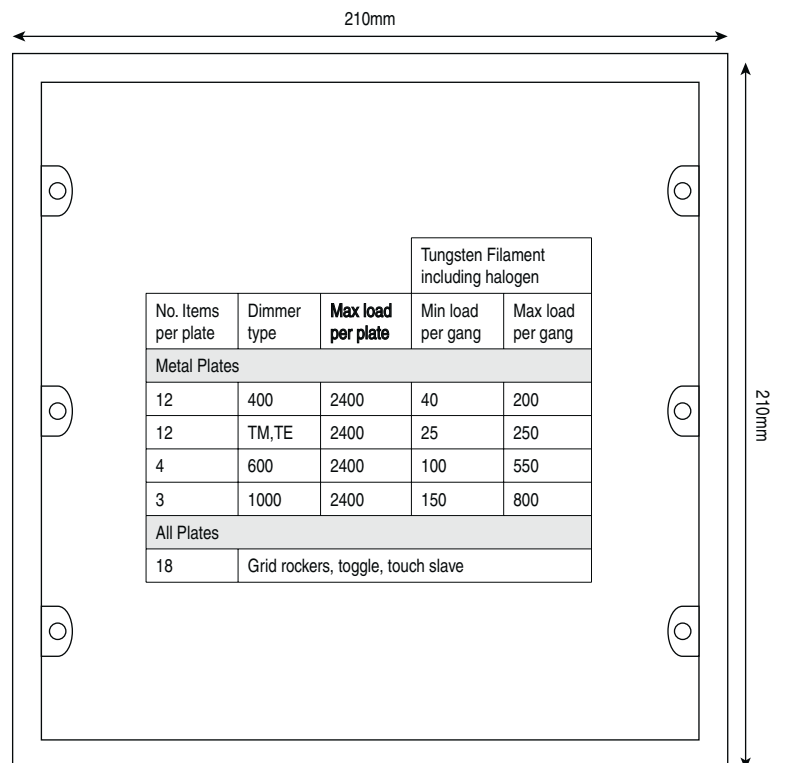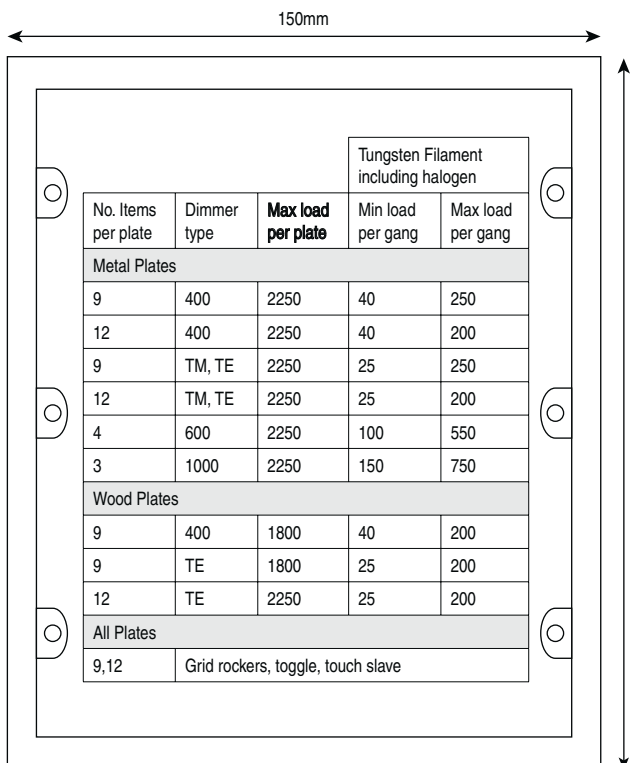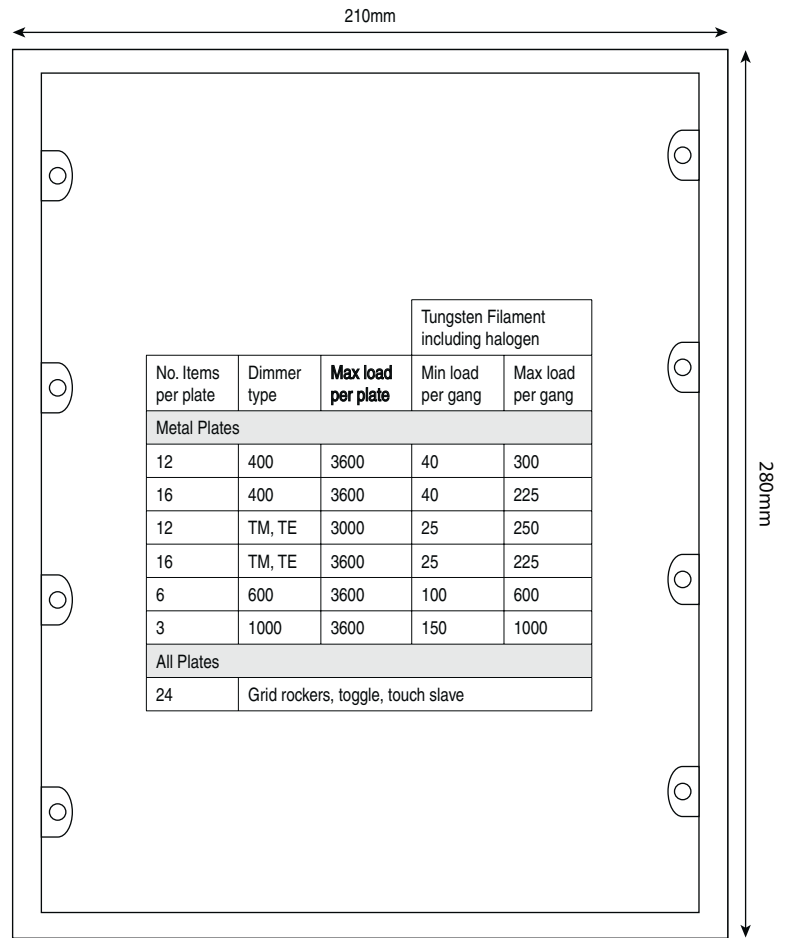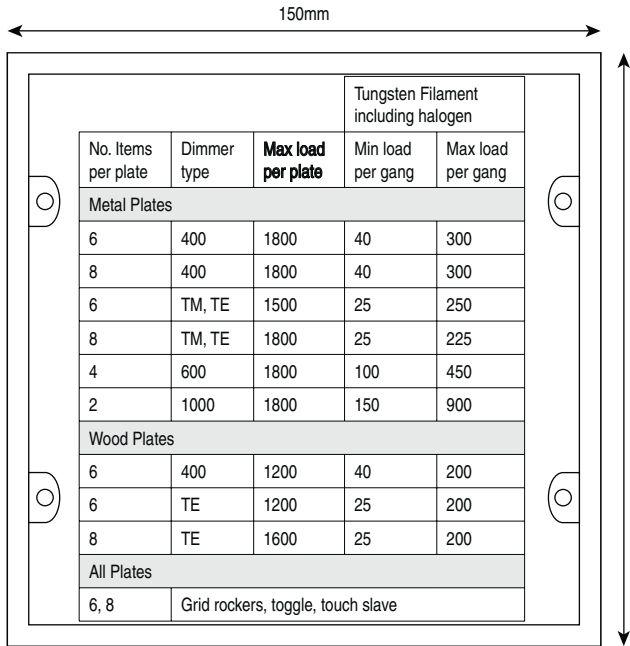


See dimmer information for Linea Halogen and GU10 LED

Head Office and Showroom:

R. Hamilton & Co. Ltd.,
Quarry Industrial Estate,
Mere,
Wiltshire BA12 6LA
Tel: +44 (0)1747 860088
Fax: +44 (0)1747 861032
Email: info@hamilton-litestat.com
www.hamilton-litestat.com


Please contact to arrange a personal viewing of our extensive range of accessories.

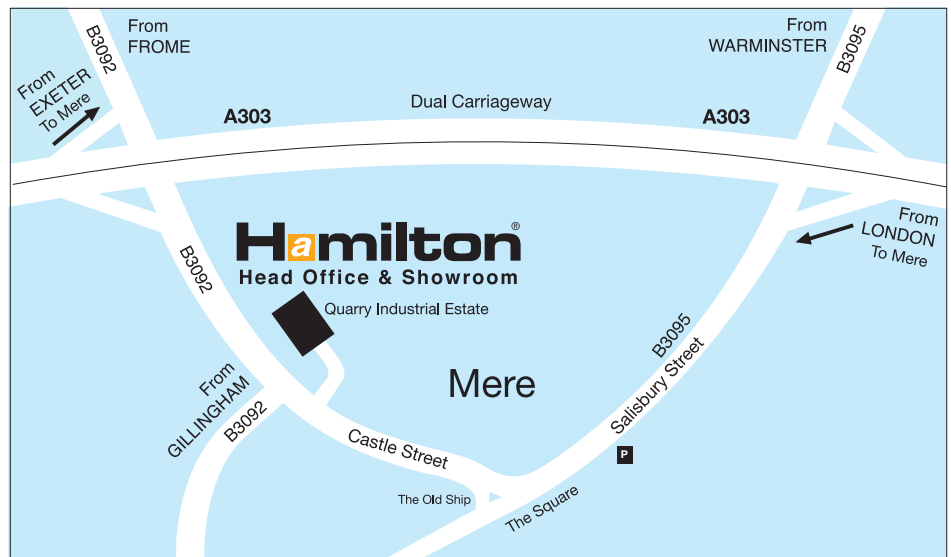

Bristol Showroom:

R. Hamilton & Co. Ltd,
Unit 10,
Carrick Business Centre,
7-10 Bonville Road,
Brislington,
Bristol BS4 5NZ

Please contact to arrange a personal viewing of our extensive range of accessories.

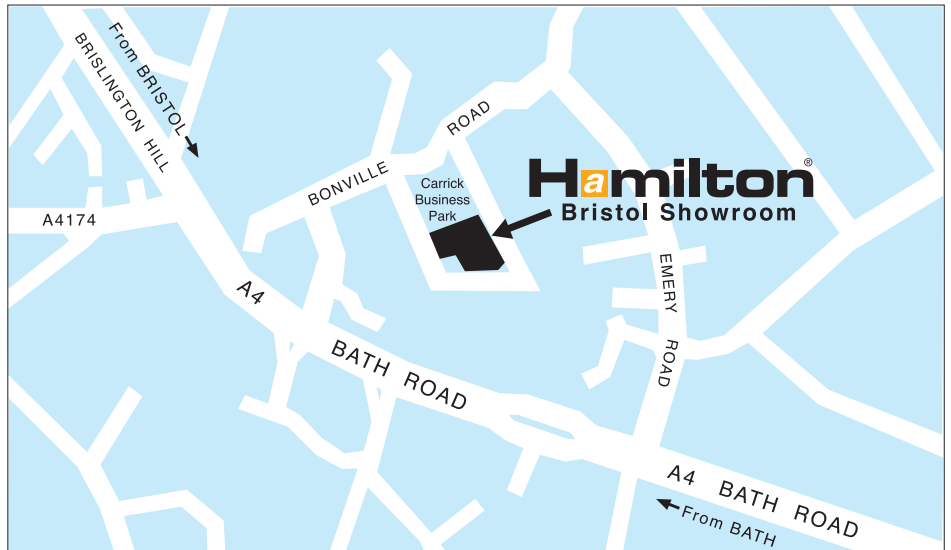

London Showroom:

R. Hamilton & Co. Ltd,
Product Galleries Location,
Lower Ground Floor J8,
The Building Centre,
26 Store Street,
London WC1E 7BT
Tel: +44 (0)207 692 4000

Opening Hours:
Monday to Friday:
9.30 am - 6.00 pm
Saturday: 10.00 am - 5.00 pm
Closed on Sundays and all Bank Holidays.



The Hamilton® Collection

excellence and elegance...

All products listed conform to current British or European standards and the product information is correct at the time of going to press.

It is the policy of the company to improve products as part of our development programme.
Therefore, we reserve the right to alter designs and dimensions without prior notice.

Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.



R Hamilton & Co Ltd
Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK
Tel: +44 (0)1747 860088 • Fax: +44 (0)1747 861032
Email: info@hamilton-litestat.com
www.hamilton-litestat.com