

## HC2012 Bollard



### HC2012 Bollard Product Specifications:

- Stainless steel bollard with cast stainless steel cap.
- 316 grade stainless steel.
- Pipe is 114mm dia with a 3mm thickness
- 900mm overground level and 300mm underground level.
- Powder coat finish, as we manufacture all our products in house we can arrange any colour combination you require, see our colour palette section on page 109.
- Fixed and removable versions with retention socket available.
- DDA compliant for visually impaired.

**Fitting:** Fixed bollard is fixed underground level in concrete, removable bollard comes complete with stainless steel flip lid retention socket.

### Concrete Foundations:

*Fixed Bollard:* 500 x 500 x 300mm.  
*Removable Bollard:* 500 x 500 x 300mm (hardcore for drainage is recommended under the socket before the concrete).

### Options Available:

- Stainless steel flip lid socket or flush socket available.
- Ram Raid.
- Other lengths available on request.
- Also available with Galvanised Steel pipe Ref HC2012G.

### Specifications:

#### HC2012 Stainless Steel

Pipe (Dia)	114 mm
Wall Thickness	3 mm
Overground	900 mm
Underground	300 mm

#### HC2012G Galvanised Steel


Pipe (Dia)	114 mm
Wall Thickness	5 mm
Overground	900 mm
Underground	300 mm



Stainless steel flush socket.



Stainless steel flip lid socket.

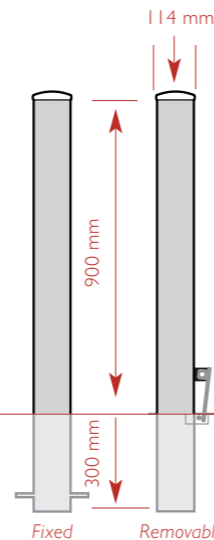

NEW

## HC2013 Bollard



### HC2013 Bollard Product Specifications:

- Stainless steel bollard with cast stainless steel cap.
- 316 grade stainless steel.
- Pipe is 114mm dia with a 3mm thickness
- 900mm overground level and 300mm underground level.
- Brushed Finish.
- Fixed and removable versions with retention socket available.

**Fitting:** Fixed bollard is fixed underground level in concrete, removable bollard comes complete with stainless steel flip lid retention socket.

### Concrete Foundations:


*Fixed Bollard:* 500 x 500 x 300mm.  
*Removable Bollard:* 500 x 500 x 300mm (hardcore for drainage is recommended under the socket before the concrete).

### Options Available:

- Stainless steel flip lid socket or flush socket available.
- Ram Raid.
- Other lengths available on request.

### HC 2013 Specifications:

Pipe (Dia)	114 mm
Wall Thickness	3 mm
Overground	900 mm
Underground	300 mm

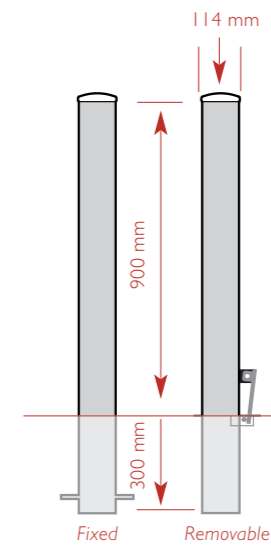

Stainless steel flush socket.



Stainless steel flip lid socket.