

Glace - Round

Glace 3K HE Rnd

4068351



Range features

- Super slim architectural design provides ultra modern minimalism with cutting-edge LED technology
- Utilises low power super efficient LED array providing perfect homogenous light distribution
- Superior fixture lumens
- Aesthetic architectural form
- Wall and ceiling mounting
- 50,000 hrs life at 70% of the original output L70
- Integral LED emergency options
- DALI dimming versions as standard
- Integral diffuser



PRODUCT OVERVIEW

Ordering number	4068351
Technology	LED
Average life (Rated) (h)	50,000+
Dimmable	No
EAN code	5026524683517
Mount	Wall and Ceiling
Housing	Aluminium
LOR (%)	100
Colour temperature (K)	3000
Luminous flux (lm)	965
Voltage (V)	230-240V
Colour	Opal (Opaque finish)
Included lamp	Integrated LED
IP rating	20
IK rating	02

Glace - Round

Glace 3K HE Rnd

4068351

DATA TABLE

General data

Technology	LED
Ordering number	4068351
Average life (Rated) (h)	50,000+
Dimmable	No
EAN code	5026524683517
Mount	Wall and Ceiling
Long description	Super slim architectural design provides ultra modern minimalism with cutting-edge LED technology. Utilises low power super efficient LED array providing perfect homogenous light distribution. Superior fixture lumens. Aesthetic architectural form. Wall and ceiling mounting. 50,000 hrs life at 70% of the original output L70. Integral LED emergency options. DALI dimming versions as standard. Integral diffuser
Product name	Glace 3K HE Rnd
Control gear availability	Yes
Environment	Interior
Housing	Aluminium
Sales pack quantity	1

Optical data

LOR (%)	100
Colour temperature (K)	3000
Luminous flux (lm)	965

Electrical data

Efficacy (Rated) (lm/w)	64.3
Total power consumption (W)	15
Voltage (V)	230-240V
Drive current (mA)	500
Total number of lamps	1

Glace - Round

Glace 3K HE Rnd

4068351

Physical data

Weight (kg)	2.00
Colour	Opal (Opaque finish)
Lamp included	Yes
Included lamp	Integrated LED
IP rating	20
IK rating	02
Cutout shape	Round
Diameter (mm)	400
Recessed depth (mm)	54
Diffuser finish	Light Opal
Diffuser material	TMMA acrylic
Emergency	No
Single package dimensions (L x W x H) (cm)	43.00 x 41.50 x 5.50
Outer package dimensions (L x W x H) (cm)	43.00 x 41.50 x 5.50

Glace - Round

Glace 3K HE Rnd


4068351

PHOTOMETRY


0.5	6.24	E(0°) E(C0)	80.9°	458 1
1.0	12.49	E(0°) E(C0)	80.9°	115 0
1.5	18.73	E(0°) E(C0)	80.9°	51 0
2.0	24.97	E(0°) E(C0)	80.9°	29 0
2.5	31.22	E(0°) E(C0)	80.9°	18 0
3.0	37.46	E(0°) E(C0)	80.9°	13 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 161.8°)

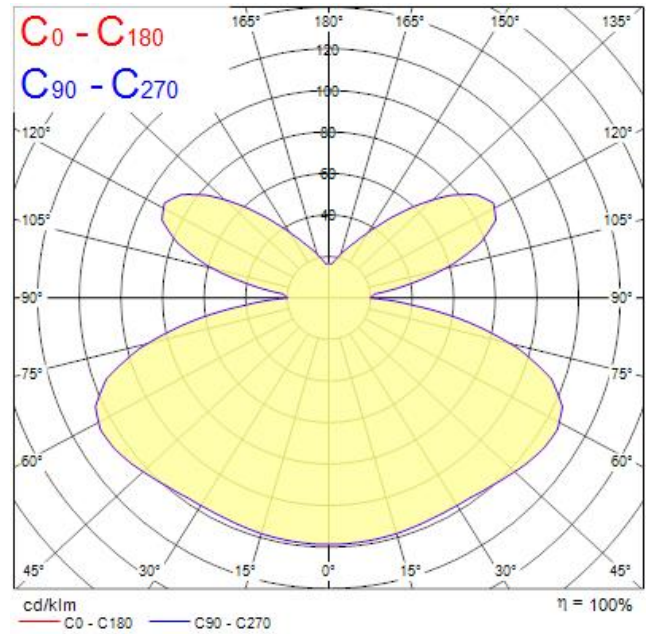

TECHNICAL DRAWINGS



ENERGY LABEL

Glace - Round

Glace 3K HE Rnd

4068351

