

LumiFix LED Kit

LumiFix LED CWH

3036700



Range features

- Low profile CREE LED Kit
- Rated voltage: 220-240V (24VDC)
- Power consumption KIT 6W
- High efficacy and low power consumption
- Easy installation Plug and Play
- Light source included
-
- The Kit includes:
- 4x 300mm single strips
- 4x 10pc Cree high brightness SMD LEDs per strip
- 4x rigid connectors and 5x mounting hangers
- 1x DC24V CE LED driver
- 1x bendable DC cable and 1x end-cap



PRODUCT OVERVIEW

Ordering number	3036700
Technology	LED
EAN code	8711971367000
Certifications	F-mark, MM-mark
Mount	Ceiling surface
Beam angle(°)	120°
Voltage (V)	220-240
Lamps	4 x 40pc Cree high brightness SMD LEDs per strip (
Included lamp	Integrated LED
IP rating	20

LumiFix LED Kit

LumiFix LED CWH

3036700

DATA TABLE

General data

Technology	LED
Ordering number	3036700
EAN code	8711971367000
E-number FI	4270011
E-number SE	7558440
Certifications	F-mark, MM-mark
Mount	Ceiling surface
Long description	Low profile CREE LED Kit. Rated voltage: 220-240V (24VDC). Power consumption KIT 6W. High efficacy and low power consumption. Easy installation Plug and Play. Light source included. . The Kit includes: 4x 300mm single strips. 4x 10pc Cree high brightness SMD LEDs per strip. 4x rigid connectors and 5x mounting hangers. 1x DC24V CE LED driver. 1x bendable DC cable and 1x end-cap
Product name	LumiFix LED CWH
Environment	Interior
Sales pack quantity	1

Optical data

Beam angle(°)	120°
Distribution type	Symmetric

Electrical data

Voltage (V)	220-240
T Class max (°C)	-1
T Class min (°C)	-1
Electrical protection	Class II
Lamps	4 x 40pc Cree high brightness SMD LEDs per strip (
Transformer availability	Included
Transformer mounting	Integral
Total number of lamps	1

Physical data


Weight (kg)	0.20
Lamp included	Yes
Included lamp	Integrated LED
Width (mm)	8
Length (mm)	1200
IP rating	20
Single package dimensions (L x W x H) (cm)	31.00 x 7.00 x 4.00
Outer package dimensions (L x W x H) (cm)	31.00 x 7.00 x 4.00

LumiFix LED Kit

LumiFix LED CWH

3036700


PHOTOMETRY

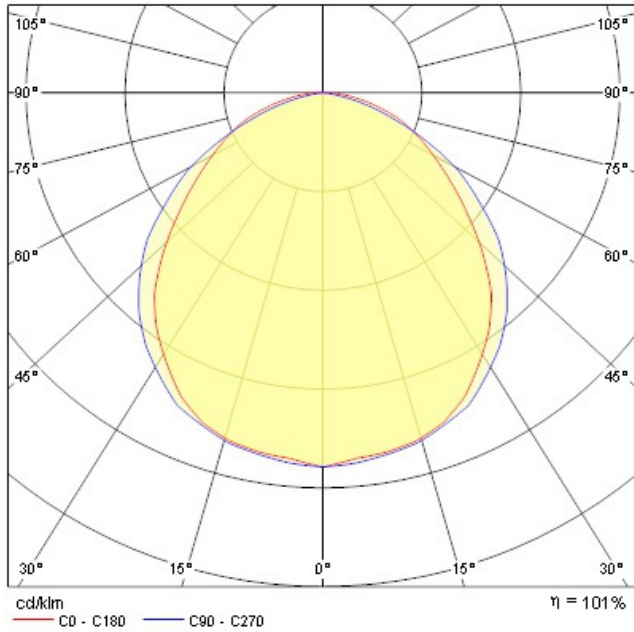

0.5	1.46 1.20	E(0°) E(C90) E(C0)	103 9 14
1.0	2.91 2.39	E(0°) E(C90) E(C0)	26 2 3
1.5	4.37 3.59	E(0°) E(C90) E(C0)	11 1 2
2.0	5.82 4.78	E(0°) E(C90) E(C0)	6 1 1
2.5	7.28 5.98	E(0°) E(C90) E(C0)	4 0 1
3.0	8.73 7.18	E(0°) E(C90) E(C0)	3 0 0

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 100.2°)
 — C90 - C270 (Half beam angle: 111.0°)

TECHNICAL DRAWINGS

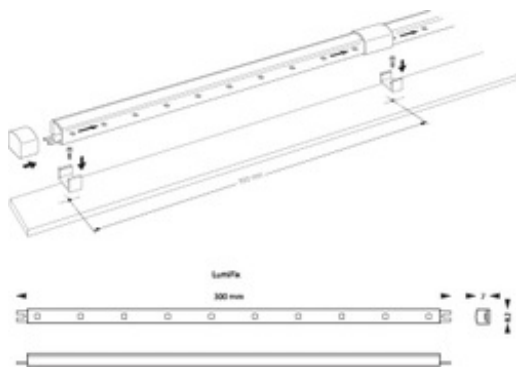

ENERGY LABEL

LumiFix LED Kit

LumiFix LED CWH

3036700

