

BLIS5

DATA SHEET



GENERAL
IP65



CLASE I




IK08


The BLIS5 luminaire is an indoor or outdoor floodlight for large areas and sports applications.

Thanks to the state-of-the-art LEDs it incorporates and the various optical distribution options, it meets the highest performance standards and provides exceptional visibility and uniformity.


Distributions



Symmetric Distribution (PR)



Asymmetric Distribution (AR)



Narrow Distribution (CR)







Dimensions (mm)

PR

AR

CR

48 LED

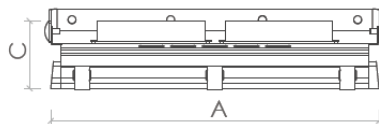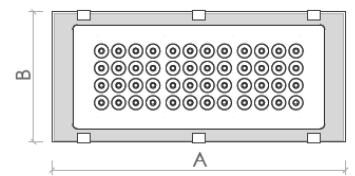

A	B	C	Kg
635	280	150	14,5

Characteristics

Material Die cast aluminium body, tempered transparent glass 5mm thickness, Louvres and diffusers. Matt satin aluminium reflector, silicon gasket, electronic ballast 230V. Rules: fittings manufactured according to the EN / IEC 60598-1:2008 rules.

Finish Colour slate grey (RAL 7015)

Enclosure 5mm thick tempered glass and aluminum clips. Laminated tempered glass available as option

Distribution Options

- Symmetric Distribution
- Asymmetric Distribution
- Narrow Distribution

Electrical Specification CI => Electrical class 1
Power Supply => 220V-240V (50Hz - 60Hz)
Power Factor > 0,97

General Sealing In accordance to EN 60529 the luminaire is sealed to IP65.

Impact Rating In accordance to EN 62262, the luminaire has an impact rating of IK08.

Operating Temperature -30°C a 45°C

Weight 14.5kg

LED Characteristics

Light Source Luminaire designed for LED technology, with a lumen range of between 43,103 to 47025 with a color temperature of 4000 K or 5000 K. RA>80

LED Life 50,000 at L80B50

Performance Characteristics

Code	Watts	°K	Delivered Lumens
8044PR4420EL	420W	4000	46103
8044PR5420EL	420W	5000	47025

Code	Watts	°K	Delivered Lumens
8044AR4420EL	420W	4000	45450
8044AR5420EL	420W	5000	46359

Code	Watts	°K	Delivered Lumens
8044CR4420EL	420W	4000	43572
8044CR5420EL	420W	5000	44444

www.holophane.co.uk



T +44 (0) 1908 649292

F +44 (0) 1908 367618

F Intl +44 (0) 1908 363789

E info@holophane.co.uk

Holophane Europe Limited
Bond Avenue, Milton Keynes,
Buckinghamshire MK1 1JG
United Kingdom