


MINI CORNICHE

Ceiling Recessed Encastré plafond

IP65
IK 05

available colors:
 .06 grey



Body made of extruded, corrosion resistant, aluminium alloy. A4 stainless steel screws. Mounting springs suitable for false ceilings with thickness from 1 to 15 mm. 5mm thick extra-clear flat tempered glass cover. Protection with anodizing treatment, epoxy powder base coating and polyester painting. External power supply by 24V DC transformer Product supplied with one power supply cable 0.5m in length. Gore valve to prevent condensation inside the product.


Corps en aluminium extrudé résistant à la corrosion. Vis en acier inox A4. Ressorts de fixation réglables et adaptés aux faux plafonds d'épaisseur de 1 à 15mm. Diffuseur en verre trempé plat extra clair de 5mm d'épaisseur. Protection de l'ensemble par traitement d'anodisation, avec primaire époxy et peinture polyester. Alimentation déportée, courant continu de 24 V DC. Appareil livré avec 0,5m de câble. Valve en Gore évitant la formation de condensation à l'intérieur du produit.



PALAZZO DI VARIGNANA HOTEL SPA & RESORT
PROJECT - ZACCHIROLI ARCHITETTI ASSOCIATI



18 LED
24V DC
600 mm

POWER SUPPLY TO BE ORDERED SEPARATELY

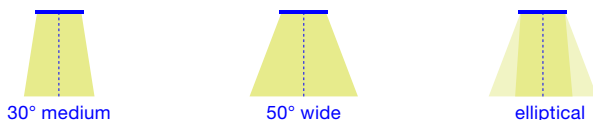



84 92 5X3
18W LED
24V DC
power supply excluded
Class III

A A+ A++





84 92 5X8
18W LED
24V DC
power supply excluded
Class III

A A+ A++



84 92 5X7
18W LED
24V DC
power supply excluded
Class III

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (2250 lm)
6 = 4000K (2520 lm)

Other versions available
ON REQUEST:
9 = 2700K (2250 lm)
7 = 5000K (2520 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue

18 LED Dynamic
max. 500mA
600 mm

POWER SUPPLY TO BE ORDERED SEPARATELY



84 92 5X3
29W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 92 5X8
29W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 92 5X7
29W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

How to create the product code?


Dynamic versions available:
0 = RGB

other versions available
ON REQUEST:
8 = Dynamic White

Control systems for dynamic light p. 374

Systèmes de contrôle pour lumière dynamique p. 374

Technical data



ACCESSORIES

89 17 006
Connector Micro Paguro IP68
max. 2 x 0,75 mm² Ø 4,8 - 6 mm
Connecteur Micro Gel IP68
max 2 x 0,75mm² Ø 4,8 - 6mm

ACCESSORIES 24V DC

89 56 072
Power supply unit IP67 24V DC 70W
Alimentation IP67 24V DC 70W


89 56 073
Power supply unit IP20 24V DC 100W
Alimentation IP20 24V DC 100W

89 56 108
Power supply unit IP20 24V DC 150W
Alimentation IP20 24V DC 150W

89 56 074
Power supply unit IP67 24V DC 150W
Alimentation IP67 24V DC 150W

89 56 075
Power supply unit IP20 24V DC 200W
Alimentation IP20 24V DC 200W

89 56 076
Power supply unit IP20 24V DC 480W
Alimentation IP20 24V DC 480W

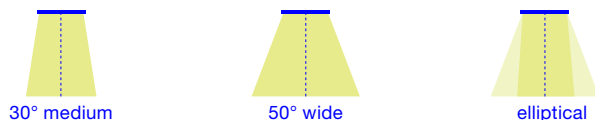



36 LED
24V DC
1200 mm

POWER SUPPLY TO BE ORDERED SEPARATELY





84 92 6X3
36W LED
24V DC
power supply excluded
Class III

A A+ A++





84 92 6X8
36W LED
24V DC
power supply excluded
Class III

A A+ A++



84 92 6X7
36W LED
24V DC
power supply excluded
Class III

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (4500 lm)
6 = 4000K (5040 lm)
Other versions available ON REQUEST:
9 = 2700K (4500 lm)
7 = 5000K (5040 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue

36 LED Dynamic
max. 500mA
1200 mm

POWER SUPPLY TO BE ORDERED SEPARATELY



84 92 6X3
58W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 92 6X8
58W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 92 6X7
58W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III


A A+ A++

How to create the product code?

Dynamic versions available:
0 = RGB
other versions available ON REQUEST:
8 = Dynamic White

Control systems for dynamic light p. 374
Systèmes de contrôle pour lumière dynamique p. 374

Technical data



ACCESSORIES

89 17 006
Connector Micro Paguro IP68
max. 2 x 0,75 mm² Ø 4,8 - 6 mm
Connecteur Micro Gel IP68
max 2 x 0,75mm² Ø 4,8 - 6mm

ACCESSORIES 24V DC

89 56 072
Power supply unit IP67 24V DC 70W
Alimentation IP67 24V DC 70W


89 56 073
Power supply unit IP20 24V DC 100W
Alimentation IP20 24V DC 100W

89 56 108
Power supply unit IP20 24V DC 150W
Alimentation IP20 24V DC 150W

89 56 074
Power supply unit IP67 24V DC 150W
Alimentation IP67 24V DC 150W

89 56 075
Power supply unit IP20 24V DC 200W
Alimentation IP20 24V DC 200W

89 56 076
Power supply unit IP20 24V DC 480W
Alimentation IP20 24V DC 480W



diffuse

MID POWER LED
24V DC

POWER SUPPLY TO BE ORDERED SEPARATELY

600 mm
Sandblasted glass
Verre sablé

84 92 5X6
10W LED
24V DC
power supply excluded
Class III


A A+



How to create
the product code?

WHITE versions available:
1 = 3000K (788 lm)
6 = 4000K (788 lm)

Technical data



MID POWER LED
24V DC

POWER SUPPLY TO BE ORDERED SEPARATELY

1200 mm
Sandblasted glass
Verre sablé

84 92 6X6
20W LED
24V DC
power supply excluded
Class III


A A+



How to create
the product code?

WHITE versions available:
1 = 3000K (1680 lm)
6 = 4000K (1680 lm)

Technical data



ACCESSORIES

89 17 006

Connector Micro Paguro IP68
max. 2 x 0,75 mm² Ø 4,8 - 6 mm
Connecteur Micro Gel IP68
max 2 x 0,75mm² Ø 4,8 - 6mm



ACCESSORIES 24V DC

89 56 072

Power supply unit IP67 24V DC 70W
Alimentation IP67 24V DC 70W



89 56 073

Power supply unit IP20 24V DC 100W
Alimentation IP20 24V DC 100W



89 56 108

Power supply unit IP20 24V DC 150W
Alimentation IP20 24V DC 150W



89 56 074

Power supply unit IP67 24V DC 150W
Alimentation IP67 24V DC 150W



89 56 075

Power supply unit IP20 24V DC 200W
Alimentation IP20 24V DC 200W



89 56 076

Power supply unit IP20 24V DC 480W
Alimentation IP20 24V DC 480W

