

MINI ONE

Applique

230V
IP65
IK 07

available colors:

- .02 white
- .06 grey
- .08 antrachite
- .09 bronze




Body and fixing plate made of die-cast aluminium alloy, corrosion resistant. Protection with anodizing treatment, epoxy powder base coating and polyester painting. 5mm thick extra-clear flat tempered glass cover. Product with no visible screws and completely hidden fixing plate. Cable input \varnothing 1-13 mm.

Corps et base en aluminium moulé sous pression, résistant à la corrosion. Protection de l'ensemble par traitement d'anodisation avec primaire époxy et peinture polyester. Diffuseur en verre trempé plat extra clair de 5mm d'épaisseur. Sans vis apparentes platine de fixation murale totalement invisible. Entrée de câble \varnothing 1-13mm.



CENTRO DIREZIONALE
MILANO, ITALIA

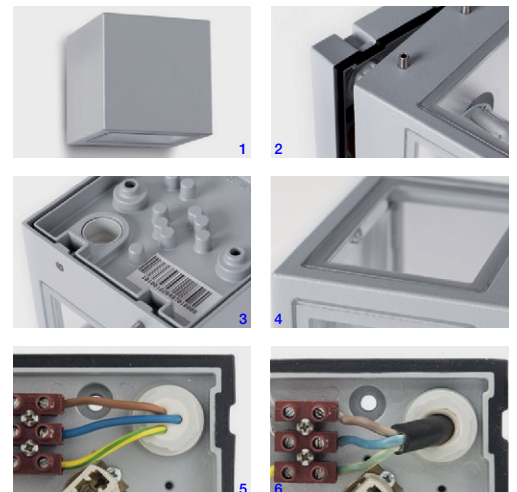

- 1 No visible screws with closing dowels
 - 2 Wall fixing plate hidden in the body
 - 3 IP 65 protection rate with IP 66 integral cable gland
 - 4 Extra-clear glass (maximum transmission of light)
 - 5 Installation of the cable gland with multipolar cables
 - 6 Installation of the cable gland with unipolar cables
- 1 Sans vis apparentes
 - 2 Platine de fixation murale dissimulée dans le corps.
 - 3 Degré de protection IP 65 avec passe-câble intégré IP 66
 - 4 Verre extra-clair (transmission maximale de la lumière)
 - 5 Installation du passe-câble avec câbles multipaires
 - 6 Installation du passe-câble avec câble

1 LED
230V



1 Opening
Transparent Glass
POWER SUPPLY INCLUDED

1 Lens



10 09 6X6
1,5W LED
220-240V 0/50/60Hz
power supply included
Class I



A A+ A++



2 Openings
Transparent Glass

10 09 6X1
1,5W LED
220-240V 50/60Hz
power supply included
Class I

A A+ A++



2 Lenses

1 lens + 1 Opening

How to create the product code?

WHITE versions available:
1 = 3000K (165 lm)
6 = 4000K (190 lm)

Other versions available
ON REQUEST:
9 = 2700K (165 lm)
7 = 5000K (190 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue


2 LED
230V

POWER SUPPLY INCLUDED



10 09 6X7
3W LED
220-240V 0/50/60Hz
power supply included
Class I



A A+ A++



4 Openings
Transparent Glass

10 09 6X2
3W LED
220-240V 50/60Hz
power supply included
Class I



A A+ A++



4 Lenses

10 09 6X5
3W LED
220-240V 50/60Hz
power supply included
Class I

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (330 lm)
6 = 4000K (380 lm)

Other versions available
ON REQUEST:
9 = 2700K (330 lm)
7 = 5000K (380 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue



4 LED
230V

POWER SUPPLY INCLUDED





10 09 6X8
6W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



10 09 6X4
6W LED
220-240V 50/60Hz
power supply included
Class I

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (660 lm)
6 = 4000K (760 lm)

Other versions available
ON REQUEST:
9 = 2700K (660 lm)
7 = 5000K (760 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue



1 LED
230V






POWER SUPPLY INCLUDED



10 11 6X1
4W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



2 Openings
Sandblasted Glass




1 LED
230V

POWER SUPPLY INCLUDED



10 11 6X2
4W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



4 Openings
Sandblasted Glass



1 LED
230V

POWER SUPPLY INCLUDED



10 11 6X4
4W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (550 lm)
6 = 4000K (590 lm)

How to create the product code?

WHITE versions available:
1 = 3000K (330 lm)
6 = 4000K (380 lm)

How to create the product code?

WHITE versions available:
1 = 3000K (660 lm)
6 = 4000K (760 lm)

Technical data

