

MINI SPRING

UPDATE 2015

Floodlight
Projecteur

Design by
LUNDBERGDESIGN

IP65
IK 06

available colors:

- .06 grey
- .09 bronze
- .08 antrachite





LEADER IN LIGHTING SOLUTIONS
An **AcuityBrands** Company

Body and closing flange made in corrosion resistant and painted die cast aluminium. Protection with anodizing treatment, epoxy powder base coating and polyester painting. 5mm thick extra-clear flat tempered glass. A4 stainless steel screws. Product supplied with 1m cable.

Corps et cadre de fermeture en aluminium moulé sous pression résistant à la corrosion. Protection de l'ensemble par traitement d'anodisation, avec primaire époxy et peinture polyester. Diffuseur en verre trempé plat extra-clair de 5mm d'épaisseur. Vis en acier inoxydable A4. Appareil livré avec 1m de câble.



BIÈVRES MAIRIE EGLISE
FRANCE

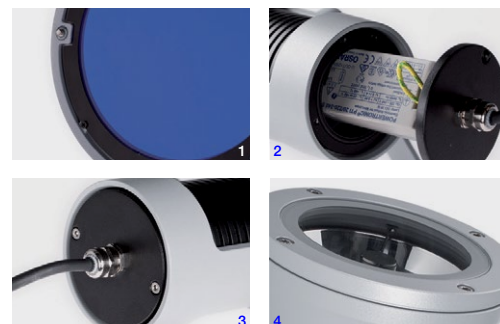


- 1 Internal holder for coloured, sandblasted and elliptical filters
- 2 Integral power supply unit (RGB versions excluded)
- 3 Product supplied with 0,5 m cable
- 4 Extra-clear glass (for maximum light transmission)

- 1 Joint d'étanchéité avec porte filtres, verre sablé ou elliptiques
- 2 Alimentation intégrée (sauf versions RGB)
- 3 Appareil livré avec 0,5 m de câble
- 4 Verre extra-clair (transmission optimale de la lumière)



COB LED 230V

POWER SUPPLY INCLUDED

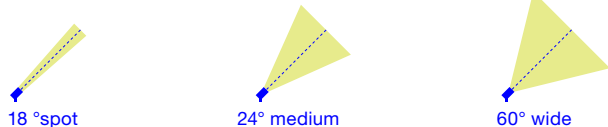



88 14 5X1
18W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++





88 14 5X3
18W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



88 14 5X8
18W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (2000 lm)
6 = 4000K (2200 lm)

COB LED DYNAMIC RGBW max. 500mA

POWER SUPPLY TO BE ORDERED SEPARATELY



88 14 501
24W LED RGBW
max. 500mA
4 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

88 14 503
24W LED RGBW
max. 500mA
4 channels + 1 channel NTC
power supply excluded
Class III


A A+ A++

88 14 508
24W LED RGBW
max. 500mA
4 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

Control systems for dynamic light p. 374
Systèmes de contrôle pour lumière dynamique p. 374

Technical data

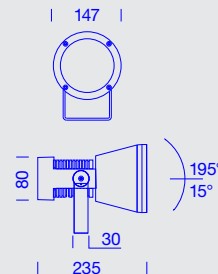

ACCESSORIES

89 18 670
Ellipsoidal filter
Filtre Elliptique

89 18 675
Sandblasted filter
Filtre Sablé

89 05 015 .01
Visor shield
Visière

89 05 085 .01
Tube shield
Canon de lumière

89 51 040
Connection to the pole 60 mm Ø
Collier de fixation pour mât de diamètre 60 mm

89 51 045
Connection to the pole Ø 102 mm
Collier de fixation pour mât de diamètre 102 mm

89 51 050
Connection to the pole Ø 114 mm
Collier de fixation pour mât de diamètre 114 mm

89 17 007
IP68 Gel Connector
max. 3 x 1,5 mm² Ø 7 - 12 mm
Connecteur rapide IP68
Ø 7 - 12 mm max. 3 x 1,5mm²

89 17 004
IP68 Gel Connector
max. 3 x 4 mm² Ø 9,5 - 12 mm
Connecteur gel IP68
max. 3 x 4 mm² Ø 9,5 - 12 mm

90 05 600
Spike for floodlight
Piquet pour Projecteur



DREUX BEFFROI CHAPELLE
FRANCE



6 LED 230V

POWER SUPPLY INCLUDED





84 23 2X1
10W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++





84 23 2X3
10W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



84 23 2X8
10W LED
220-240V 0/50/60Hz
power supply included
Class I

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (990 lm)
6 = 4000K (1140 lm)

Other versions available
ON REQUEST:
9 = 2700K (990 lm)
7 = 5000K (1140 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue

6 LED DYNAMIC max. 500mA

POWER SUPPLY TO BE ORDERED SEPARATELY



84 23 2X1
10W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 23 2X3
10W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 23 2X8
10W LED
max. 500mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++


How to create the product code?

Dynamic versions available:
0 = RGB

other versions available
ON REQUEST:
8 = Dynamic White

Control systems for dynamic light p. 374
Systèmes de contrôle pour lumière dynamique p. 374

Technical data

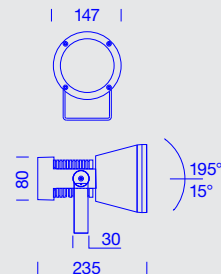

ACCESSORIES

89 18 670
Ellipsoidal filter
Filtre Elliptique

89 18 675
Sandblasted filter
Filtre Sablé

89 05 015 .01
Visor shield
Visière

89 05 085 .01
Tube shield
Canon de lumière

89 51 040
Connection to the pole Ø 60 mm
Collier de fixation pour mât de diamètre 60 mm

89 51 045
Connection to the pole Ø 102 mm
Collier de fixation pour mât de diamètre 102 mm

89 51 050
Connection to the pole Ø 114 mm
Collier de fixation pour mât de diamètre 114 mm

89 17 007
IP68 Gel Connector
max. 3 x 1,5 mm² Ø 7 - 12 mm
Connecteur rapide IP68
Ø 7 - 12 mm max. 3 x 1,5mm²

89 17 004
IP68 Gel Connector
max. 3 x 4 mm² Ø 9,5 - 12 mm
Connecteur gel IP68
max. 3 x 4 mm² Ø 9,5 - 12 mm

90 05 600
Spike for floodlight
Piquet pour Projecteur



LE SALMANAZAR
SCÈNE DE CRÉATION ET DE DIFFUSION D'ÉPERNAY

saison 13/14



9 LED 230V

POWER SUPPLY AND NTC INCLUDED





84 23 3X1
20,5W LED
220-240V 0/50/60Hz
power supply included
NTC included
Class I

A A+ A++





84 23 3X3
20,5W LED
220-240V 0/50/60Hz
power supply included
NTC included
Class I

A A+ A++



84 23 3X8
20,5W LED
220-240V 0/50/60Hz
power supply included
NTC included
Class I

A A+ A++



How to create the product code?

WHITE versions available:
1 = 3000K (1980 lm)
6 = 4000K (2250 lm)
Other versions available
ON REQUEST:
9 = 2700K (1980 lm)
7 = 5000K (2250 lm)
4 = Amber
2 = Red
3 = Green
5 = Blue

9 LED DYNAMIC max. 700mA

POWER SUPPLY TO BE ORDERED SEPARATELY



84 23 3X1
20,5W LED
max. 700mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 23 3X3
20,5W LED
max. 700mA
3 channels + 1 channel NTC
power supply excluded
Class III

A A+ A++

84 23 3X8
20,5W LED
max. 700mA
3 channels + 1 channel NTC
power supply excluded
Class III


A A+ A++

How to create the product code?

Dynamic versions available:
0 = RGB
other versions available
ON REQUEST:
8 = Dynamic White

Control systems for dynamic light p. 374
Systèmes de contrôle pour lumière dynamique p. 374

Technical data

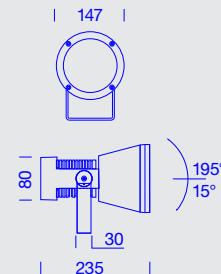

ACCESSORIES

89 18 670
Ellipsoidal filter
Filtre Elliptique

89 18 675
Sandblasted filter
Filtre Sablé

89 05 015 .01
Visor shield
Visière

89 05 085 .01
Tube shield
Canon de lumière

89 51 040
Connection to the pole Ø 60 mm
Collier de fixation pour mât de diamètre 60 mm

89 51 045
Connection to the pole Ø 102 mm
Collier de fixation pour mât de diamètre 102 mm

89 51 050
Connection to the pole Ø 114 mm
Collier de fixation pour mât de diamètre 114 mm

89 17 007
IP68 Gel Connector
max. 3 x 1,5 mm² Ø 7 - 12 mm
Connecteur rapide IP68
Ø 7 - 12 mm max. 3 x 1,5mm²

89 17 004
IP68 Gel Connector
max. 3 x 4 mm² Ø 9,5 - 12 mm
Connecteur gel IP68
max. 3 x 4 mm² Ø 9,5 - 12 mm

90 05 600
Spike for floodlight
Piquet pour Projecteur