


SLIM

Famiglia di paletti dal design elegante e pulito, dallo spessore di soli 36 mm, SLIM è un paletto dalle forme discrete che può essere installato anche a ridosso di pareti e muri, senza creare ingombro. Un insieme di rettangoli compongono il paletto, con il diffusore in vetro sullo stesso piano del corpo completamente a filo. Disponibile in due altezze e con emissione mono e bidirezionale, risulta adatto per camminamenti e vialetti di parchi e giardini.

Family of stalks from clean, elegant design and a thickness of just 36 mm, SLIM is a stalk in discrete forms that can also be installed close to different walls, with no encumbrance. A set of rectangles composes the wicket, with glass diffuser on the same plane of the body completely flush. Available in two heights and with mono and bi-directional emission, it is suitable for walkways and paths of parks and gardens.



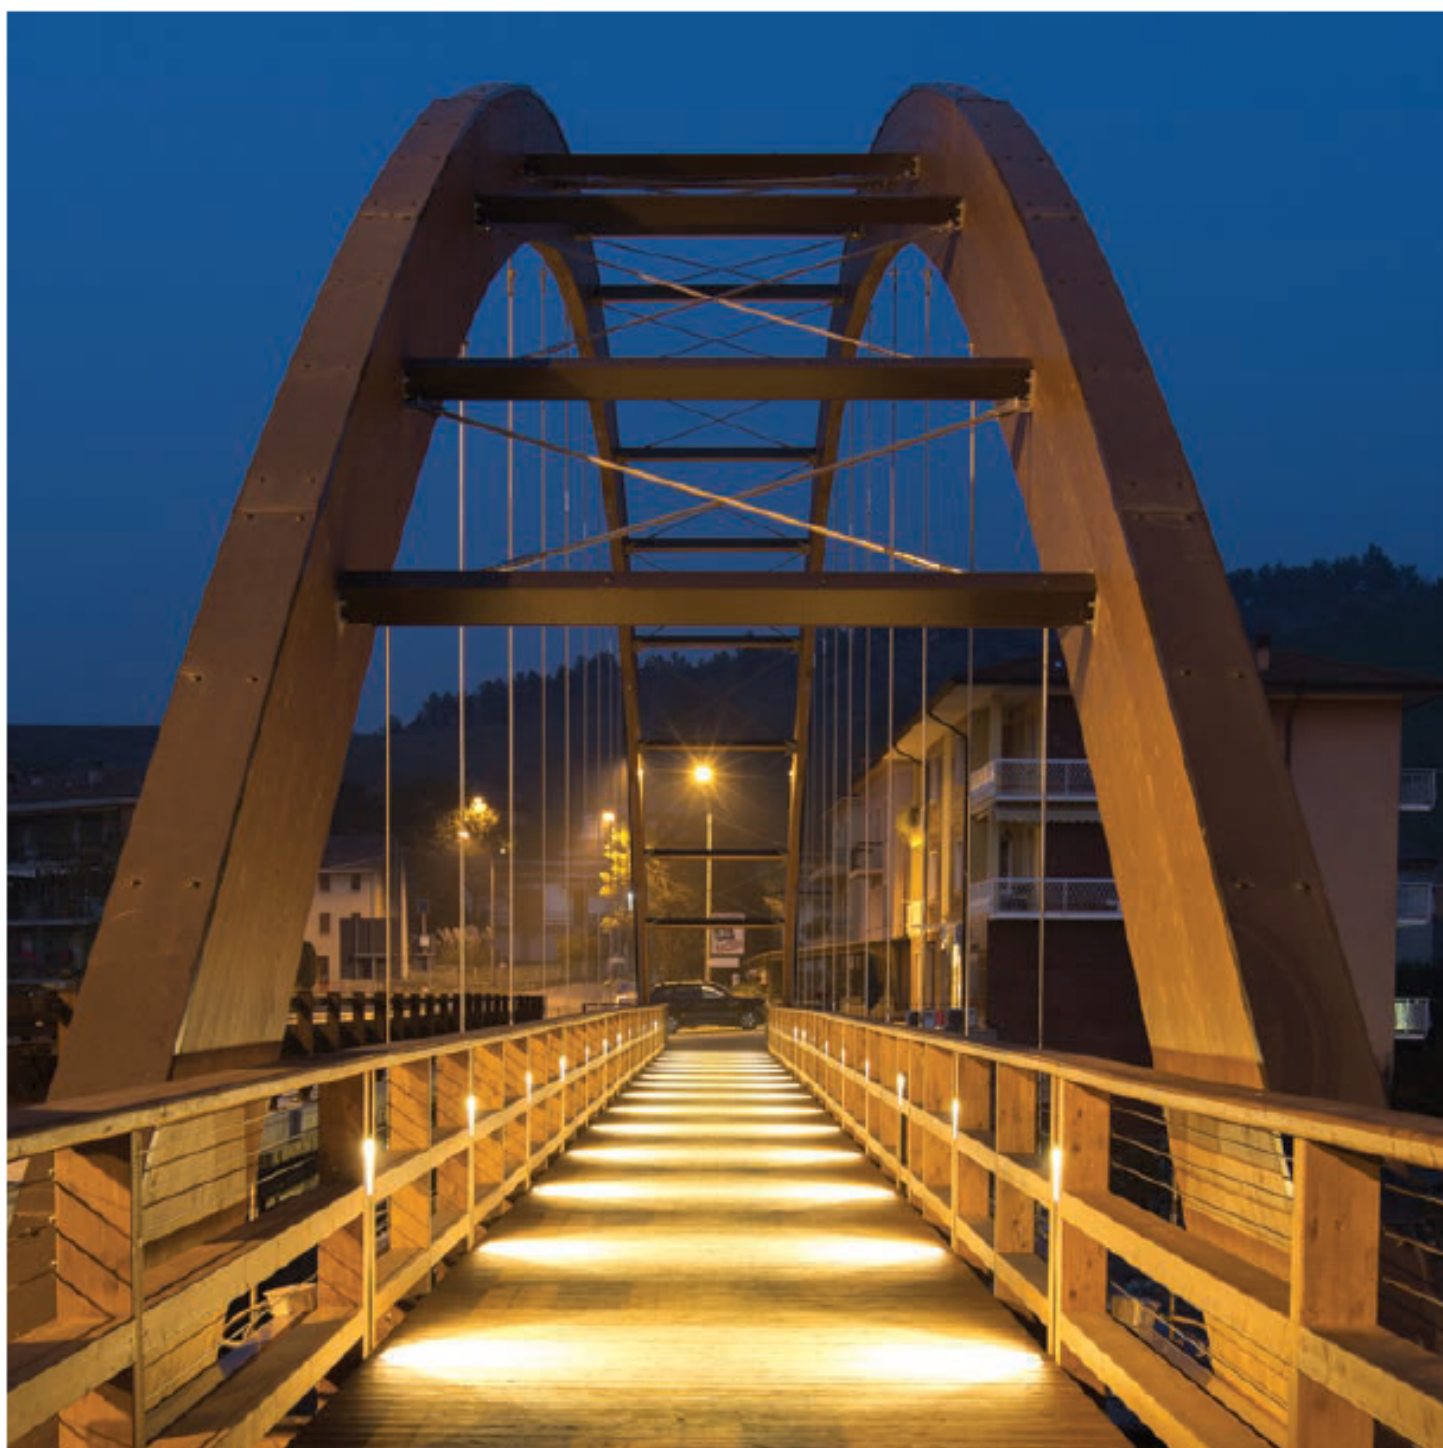

INFORMAZIONI TECNICHE

Corpo in lega di alluminio estruso verniciato e resistente alla corrosione. Protezione con trattamento di anodizzazione, fondo con polveri epossidiche e verniciatura poliestere. Flangia di fissaggio a pavimento completamente a scomparsa. Valvola in Gore per impedire la formazione di condensa all'interno del prodotto.

TECHNICAL INFORMATION

Body made of extruded, corrosion resistant, aluminium alloy. Protection with anodizing treatment, epoxy powder base coating and polyester painting. Completely hidden ground fixing flange. Gore valve to prevent condensation inside the product.

WHITE
COB LED
230V




SINGLE
EMISSION

50 00 611
LED 3000K COB CRI>80
8W / 1000 lm LED data
8,8W / 700 lm Real data
220-240V 0/50/60Hz
1 opening
Height 500 mm
A / A+ / A++



817
cd/klm

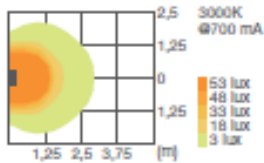

2,5 3000K
@700 mA
53 lux
48 lux
33 lux
18 lux
3 lux




DOUBLE
EMISSION

50 00 612
LED 3000K COB CRI>80
8W / 1000 lm LED data
8,8W / 650 lm Real data
220-240V 0/50/60Hz
2 openings
Height 500 mm
A / A+ / A++



431
cd/klm

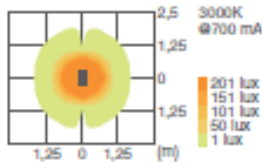

2,5 3000K
@700 mA
201 lux
151 lux
101 lux
50 lux
1 lux


PRODUCT INFORMATION

IP65
IK 08
5 mm thick extra-clear flat
tempered glass
Cable input Ø 5,5+10 mm

AVAILABLE COLOURS

■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA



WHITE
COB LED
230V




SINGLE
EMISSION

50 10 611
LED 3000K COB CRI>80
8W / 1000 lm LED data
8,8W / 700 lm Real data
220-240V 0/50/60Hz
power supply included
Height 800 mm
A / A+ / A++



817
cd/klm

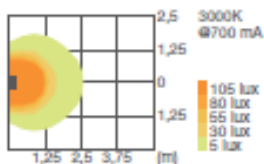

2,5 3000K
@700 mA
105 lux
80 lux
55 lux
30 lux
5 lux




DOUBLE
EMISSION

50 10 612
LED 3000K COB CRI>80
8W / 1000 lm LED data
8,8W / 650 lm Real data
220-240V 0/50/60Hz
power supply included
Height 800 mm
A / A+ / A++



431
cd/klm

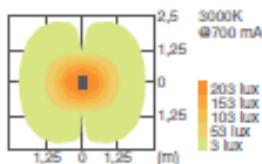

2,5 3000K
@700 mA
203 lux
153 lux
103 lux
53 lux
3 lux


PRODUCT INFORMATION

IP65
IK 08
5 mm thick extra-clear flat
tempered glass
Cable input Ø 5,5+10 mm

AVAILABLE COLOURS

■ .06 grey
■ .08 anthracite
Other colours on request

TECHNICAL DATA



Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)
Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

INFO

Ulteriori versioni sono
disponibili consultando
www.platek.eu

More versions are available on
www.platek.eu

LED
LED COLOURS
TEMPERATURE
4000K

Other LED colours
available on request

COLORS

FINISHES

■ .01 black
■ .02 white
■ .07 cortan
■ .09 bronzo

ACCESSORI (per maggiori dettagli consultare pagina 321)
ACCESSORIES (for further details please refer to page 321)



FIXING
page 341
89 50 025 - T16 rod



More details at:
platek.eu/SLIM