


# S1719S Interguard Maintenance Keyswitch



Wall Mounting Stainless Steel two position keyswitch. Designed for use with Interguard door interlock systems as the maintenance switch.


- Brushed Stainless Steel
- Supplied with 38mm deep galvanised mounting box for flush fitting
- IP Rated
- Customised versions available on request
- Surface mount using S0610

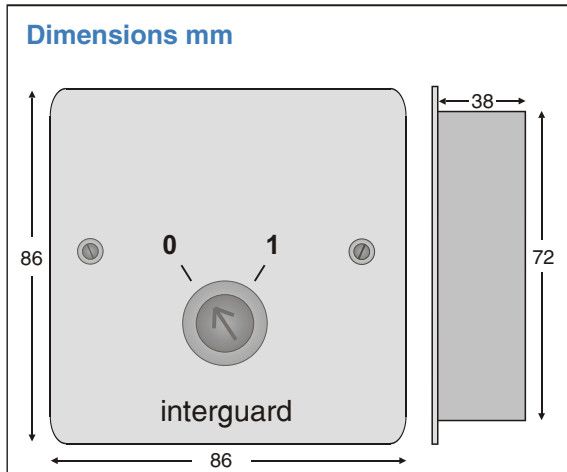

| Specification          | S1709S  |
|------------------------|---|
| Led Current            | N/A   |
| Switch Contacts        | DPCO 2A@ 30vdc  |
| Visual Indication      | N/A   |
| Integral Sounder Level | N/A   |
| Tamper                 | N/A   |
| Material               | 304 Grade Stainless Steel   |
| Facia Dimensions       | 86mm x 86mm x 2mm   |
| Weight                 | 0.28kg  |
| IP Rating              | IP54 - To maintain the IP rating a suitable sealant or gasket for the rear of the plate is required |
| Approvals              | CE and RoHs compliant   |



## Related Products

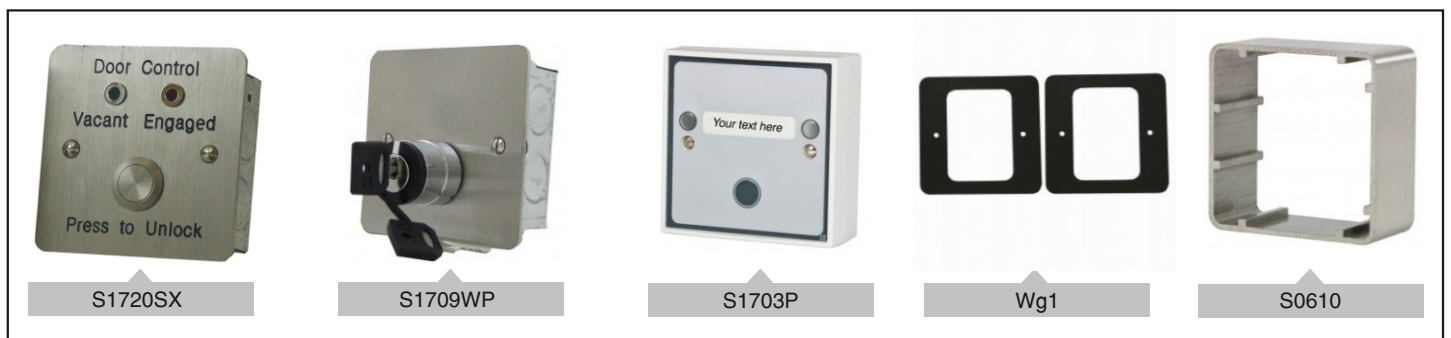

**Hoyles Electronic Developments Ltd**

T. 01744 886600

F. 01744 886607

E. sales@hoyles.com

W. www.hoyles.com

