




Jasper Morrison urinal, rim flushing, Fully Concealed

Illustrated

- E6215** Jasper Morrison bowl urinal rim flushing, back inlet and concealed waste
- E6227** Urinal syphon connector with 75mm water seal, and 40mm outlet
- K7106** Urinal Connecting set
- A4188** Sensorflow 21 Electronic urinal flushing valve with concealing plate, mains

Configuration options

- A4189** Sensorflow 21 Electronic urinal flushing valve with concealing plate, link
- S6120** Urinal division Vitreous China with hanger and screw
- A4187** Sensorflow 21 urinal flush, battery, square panel mounted housing

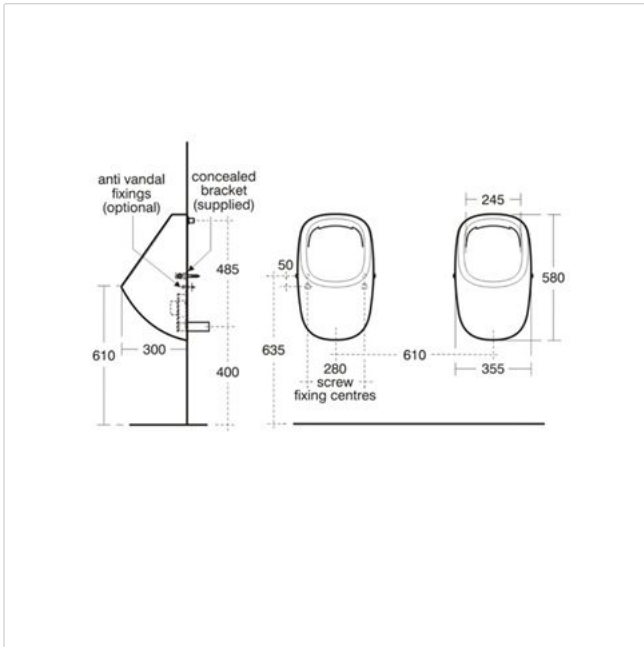

Material

Vitreous China

Standards

Vitreous china to BS 3402

Weights

- E6215 17.00KG
- E6227 0.50KG
- K7106 0.09KG
- A4188 1.90KG

Colours

White (01)

Special Notes

Please click the [Specify this] button and then configure the bowl by adding one of the Sensorflow 21 electronic urinal flushing products.
Mains versions can power up to 5 link flushing valves or the battery versions can be independent. Please refer to Sensorflow 21 compact urinal flushing device pages.
Then add as many urinals assembly types: mains/linked/battery, as needed in the room schedule.
Not suitable for flushing from a cistern and nominal working mains water pressure needed is 3.0 bar

Designer

Jasper Morrison



Frequently used applications

- | | |
|--------------------|--------|
| Hotels | Office |
| Public Building | Retail |
| Sports and Leisure | |

Accreditations

WRAS



Email: info@idealspec.co.uk
Tel: 0870 122 8822
Fax: 0870 122 8282
Web: www.idealspec.co.uk

