

Composure

Interface®




303003 Solitude




303002 Diffuse



303008 Isolation

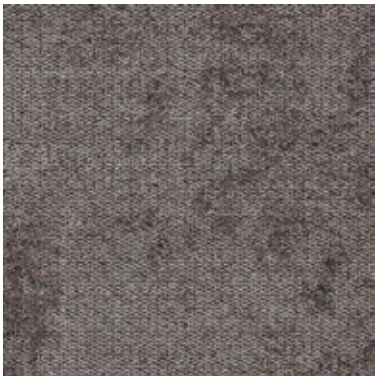

303020 Secure

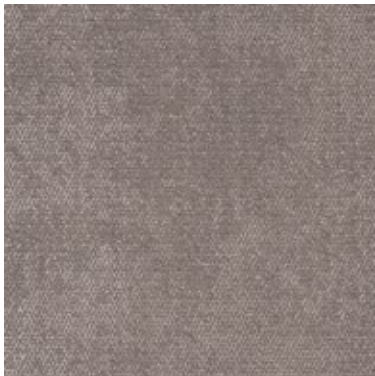

303005 Serene




303011 Soothe



303007 Transcribe




303016 Reserved

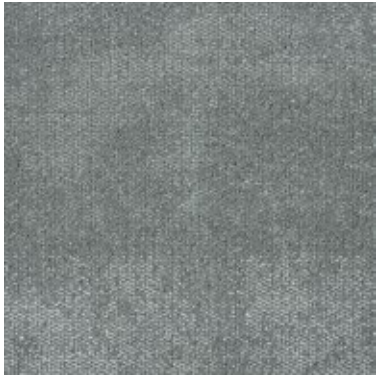

303018 Regard



303009 Content

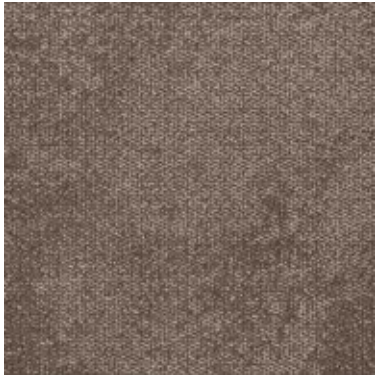


303010 Ponder




303014 Comtemplate



303021 Deliberate

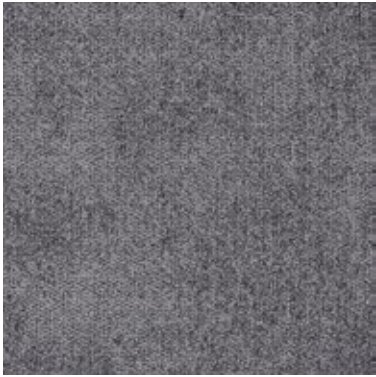

303017 Seclusion

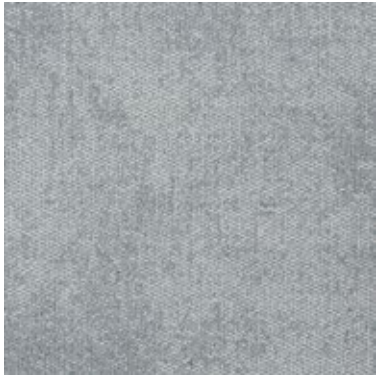


303019 Patience



303012 Retreat



303013 Temperate

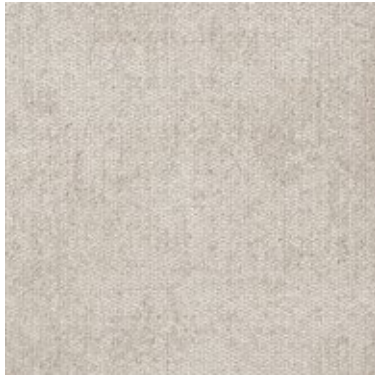

303015 Harmonious



303011 Soothe & 303015 Harmonious

Installed: Non Directional



303019 Patience

Installed: Non Directional



303017 Seclusion

Installed: Non Directional



303008 Isolation

Installed: Non Directional

Technical Specifications

Product Definition		Tufted Patterned Structured Loop Tile
Konstruktion		Tuftgemusterte strukturierte Schlingenqualität
Descripción		Moqueta modular tufting bucle estructurado con diseño
Description		Dalle de moquette à velours tufté bouclé structuré à motifs
Type		Getufte gedessineerde gestructureerde bouclé
Descrizione		Bouclè tufted strutturato
Pile Material		100% Solution Dyed Nylon, contains recycled content
Polfasematerial		100% Solution Dyed Polyamid, enthält recycelte Anteile
Composición Fibra		100% Poliamida tintada en masa, con contenido reciclado
Composition		100% Polyamide teint masse, contenant des éléments recyclés
Poolmateriaal		100% Solution Dyed Nylon, bevat gerecycled material
Fibra		100% Poliammide tinta in massa, contiene ugualmente materiale riciclato
Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra /		570 g/m² ± 5%
Poids de fibre / Poolinzetgewicht / Peso Felpa		
Total Weight / Gesamtgewicht / Peso Total / Poids total		4356 g/m² ± 5%
/		Totaalgewicht / Peso Totale
Pile Height / Polschichtdicke / Altura Fibra /		2,6 mm ± 0,3 mm
Hauteur de la fibre / Poolhoogte / Altezza Felpa		
Total Thickness / Gesamtdicke / Espesor Total /		6,4 mm ± 0,5 mm
Epaisseur totale / Totale dikte / Altezza Totale		
Gauge/Ends 10 cm / Teilung x 10 cm / Galga x10 cm /		1/12 – 47,2
Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm		
Tufts per m² / Noppenzahl/m² / Puntadas m² / Densité du tuft par m² /		160.480 ± 5%
Aantal noppen per m² / Densità Punti		
Backing Type / Rückenkonstruktion / Soporte /		Graphlex®
Sous-couche / Ruguitvoering / Sottofondo		
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico /		Heavy Contract (EN 1307)
Classement d'usage et de confort /Gebruiksintensiteit / Resistenza all'usura		Class 33 / LC1
Radiant Panel /Schwerentflammbarkeit / Clasificación Al Fuego /		(EN ISO 9239-1)
Classement feu / De Radiant Panel Test / Valutazione delle proprietà ignifughe		Euroclass Cfl s1 (EN 13501-1)
Dimensional Stability / Dimensionsstabilität / Estabilidad Dimensional /		≤ 0,2% (EN 986)
Stabilité dimensionnelle / Dimensionele stabiliteit / Test Stabilità dimensionale		
Impact Sound Insulation (ΔL_w) / Trittschallverbesserungsmaß /		ΔL _w 25 dB (EN ISO 10140-3)
Impacto Aislamiento Acústico / Réduction du bruit d'impact /		
Contactgeluid absorptie / Isolamento all'impatto acustico		α _w 0,20
Rating of Sound Absorption / Gewichteter Schallabsorptionskoeffizient/		(EN ISO 11654)
Clasificación de Absorción de Sonido / Coefficient d'absorption acoustique /		
Waarde geluidsabsorptie / Valutazione dell'assorbimento acustico		
Sound Absorption / Schallabsorptionsgrad / Absorción de Sonido /		
Absorption acoustique / Geluidsabsorptie / Assorbimento acustico		
125Hz	250Hz	500Hz
0,01	0,05	0,08
		1000Hz
		0,22
		2000Hz
		0,34
		4000Hz
		0,44
		α _s
Style	30345	4m² - 16 tiles per box (50 x 50 cm ± 0,2%)

EN 14041

CE

DOP: 1037/120955

textile floor covering

EN 1307

↶

↷

↵

↴

Non Directional

33

W

Cfl-s1

DS

<10³q

25dB

0,2dB

≥7

↵↴

≥2,4

Interface European Manufacturing BV reserve the right to change or modify specifications.

Interface European Manufacturing BV behält sich das Recht vor, Produktspezifikationen zu ändern oder entsprechend anzupassen.

Interface European Manufacturing BV se reserva el derecho a modificar las especificaciones arriba referenciadas.

Interface European Manufacturing BV se réserve la possibilité de modifier les caractéristiques ci-dessus.

Interface European Manufacturing BV behoudt zich het recht voor de specificaties te allen tijde aan te passen.

Interface European Manufacturing BV si riserva il diritto di modificare le proprie specifiche tecniche senza preavviso.

For full environment data, visit:
www.interface.com/eds

Visit our design blog at:
www.designwithpurposeblog.com

Light Values

Product	Colour No	Colour Name	L Value*	Y Value*
Composure	303002	Diffuse	31.0	6.6
	303003	Solitude	24.2	4.2
	303005	Serene	43.4	13.5
	303007	Transcribe	35.5	8.8
	303008	Isolation	50.1	18.5
	303009	Content	35.8	8.9
	303010	Ponder	37.9	10.1
	303011	Soothe	57.7	25.7
	303012	Retreat	46.5	15.7
	303013	Temperate	50.7	19.0
	303014	Contemplate	56.0	23.9
	303015	Harmonious	67.0	36.6
	303016	Reserved	37.9	10.1
	303017	Seclusion	43.0	13.2
	303018	Regard	41.6	12.2
	303019	Patience	59.4	27.5
	303020	Secure	37.3	9.7
	303021	Deliberate	37.0	9.6

- * **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493
- Lichtreflexionswerte:** L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493
- Valores de Reflectancia de Luz:** Valor L= L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493
- Valeurs concernant la lumière:** Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur , Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493
- Licht waarden:** L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493
- Indici di riflettanza alla luce:** Indice L= L secondo CIE L*a*b* colour space, IndiceY= Indice di riflettanza alla luce secondo la norma BS 8493

Environmental Data Sheet

Construction			
Yarn system	BCF Solution Dyed Nylon (PA6.6)		
Backing system	Graphlex®		
Recycled Content	Total	Pre Consumer	Post Consumer
Yarn average	20,52%	19,69%	0,83%
Product average	51,82%	51,72%	0,10%
Recycled content can be subject to differences between colours. See details for individual colours on next page.			
Carbon Footprint	Global Warming Potential (kgs CO2 equivalents/sq meter)		
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:	8.3 kg CO ₂ eq./m²	
	Delivery and installation:	0.32 kg CO ₂ eq./m²	
	Use (10 years):	2 kg CO ₂ eq./m²	
	End of life (waste to energy):	4.6 kg CO ₂ eq./m²	
	TOTAL (10 years' lifetime):	15.22 kg CO ₂ eq./m²	
CO ₂ compensation	Carbon neutral Cool Carpet® is standard		
Manufacturing			
Location	Scherpenzeel, NL		
	Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990		
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Non directional - 1 to 2% installation waste		
	For reference: 2 metre wide broadloom typically generates 7-10 % installation waste		
	* In a rectangular building, installed before walls.		
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
	Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles		
	Waste-to-Energy: Can be incinerated in appropriate waste to energy plant		
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour.		
	GUT PRODIS certificate : Applied for		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
	See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)		
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product is covered by the Environmental Product Declaration EPD-IFF-2011711-E		

Recycled content – colour level						
Colourway	Total Recycled Content	Pre consumer recycled content	Post consumer recycled content	Total yarn recycled content	Yarn pre-consumer	Yarn post-consumer
303002 Diffuse	51,50%	51,50%	0,00%	21,06%	21,06%	0,00%
303003 Solitude	51,70%	51,70%	0,00%	23,05%	23,05%	0,00%
303005 Serene	51,40%	51,40%	0,00%	20,73%	20,73%	0,00%
303007 Transcribe	52,13%	51,98%	0,15%	20,30%	19,10%	1,20%
303008 Isolation	51,35%	51,35%	0,00%	20,22%	20,22%	0,00%
303009 Content	52,46%	52,46%	0,00%	22,88%	22,88%	0,00%
303010 Ponder	52,41%	52,41%	0,00%	22,51%	22,51%	0,00%
303011 Soothe	51,28%	51,13%	0,15%	19,68%	18,48%	1,20%
303012 Retreat	52,22%	52,22%	0,00%	20,98%	20,98%	0,00%
303013 Temperate	51,49%	51,49%	0,00%	21,35%	21,35%	0,00%
303014 Comtemplate	51,40%	51,40%	0,00%	20,64%	20,64%	0,00%
303015 Harmonious	50,33%	49,34%	0,99%	12,17%	4,37%	7,80%
303016 Reserved	52,15%	52,15%	0,00%	20,41%	20,41%	1,20%
303017 Seclusion	52,14%	51,98%	0,15%	20,32%	19,12%	1,20%
303018 Regard	51,96%	51,80%	0,15%	18,89%	17,69%	1,20%
303019 Patience	51,25%	51,10%	0,15%	19,43%	18,23%	1,20%
303020 Secure	52,27%	52,11%	0,15%	21,35%	20,15%	1,20%
303021 Deliberate	52,36%	52,36%	0,00%	22,05%	22,05%	0,00%



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want



Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.