




Interface® | Infuse



SPECIFICATION

Product definition	Tufted Patterned Structured Loop Tile	Style number	33345
Pile Material	100% BCF Solution Dyed Nylon contains pre-consumer recycled content	Wear Classification	EN 1307 33 Heavy Contract
Pile Yarn Weight	587g/m ² ± 10%	Radiant panel	(EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501)
Effective pile yarn weight	425g/m ² ± 10%	Hot Metal Nut Castor Chair Rating	≥ 2,4 (EN 985)
Total Weight	4482 g/m ² ± 5%	Dimensional Stability	≤ 0,2% (ISO 2551 / EN 986)
Pile Height	3.4 mm ± 0.5 mm	Vertical Electrical Resistance	5 x 10 ⁵ Ω >< 1 x 10 ⁹ Ω Computerguard (ISO 10965)
Total Thickness	6.8 mm ± 0.5 mm	Colour Fastness - Light	≥ 7 (ISO 105/B02)
Gauge/Ends per 10cm	1/10 - 39.4	Tiles per Box	16 - 4m ² (50 x 50 cm ± 0,2%)
Tufts per m2	173,360 ± 7.5%		
Backing Type	Graphlex®		

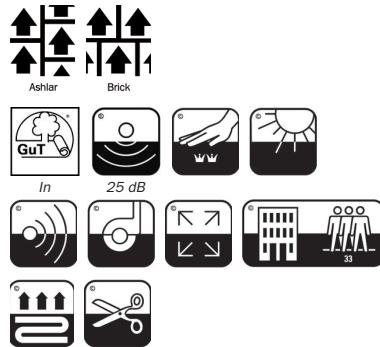

 06
 0336-CPD-8538


Cfl-s1


DS



≤10⁹Ω

EN 1307



Mission Zero:
 our promise to eliminate
 any negative impact our company
 may have on the environment
 by the year 2020.

www.interface.com

Interface Europe Ltd reserve the right to change or modify specifications