

# Interface® | Net Effect B702

## SPECIFICATION

|                                |   |                                       |   |
|--------------------------------|---|---------------------------------------|---|
| <b>Product definition</b>      | Tufted Patterned Structured Loop Tile   | <b>Style number</b>                   | <b>32135</b>  |
| <b>Pile Material</b>           | 100% Recycled BCF Solution Dyed Nylon contains pre and post-consumer recycled content | <b>Wear Classification</b>            | EN 1307 33 Heavy Contract   |
| <b>Pile Yarn Weight</b>        | 610g/m <sup>2</sup> ± 5%  | <b>Radiant panel</b>                  | (EN ISO 9239/1) Euroclass Cfl S1<br>(EN ISO 13501)                          |
| <b>Total Weight</b>            | 4583g/m <sup>2</sup> ± 5%   | <b>Hot Metal Nut</b>                  | Pass, low radius of effects of ignition (BS 4790)                           |
| <b>Pile Height</b>             | 3.0 mm ± 0.3 mm   | <b>Castor Chair Rating</b>            | ≥ 2.4 (EN 985)  |
| <b>Total Thickness</b>         | 7.1 mm ± 0.5 mm   | <b>Dimensional Stability</b>          | ≤ 0.2% (ISO 2551/EN 986)  |
| <b>Gauge/Ends per 10cm</b>     | 1/10 - 39.4   | <b>Vertical Electrical Resistance</b> | 5 x 10 <sup>5</sup> Ω >> 1 x 10 <sup>9</sup> Ω<br>Computerguard (ISO 10965) |
| <b>Tufts per m<sup>2</sup></b> | 169,420 ± 5%  | <b>Colour Fastness - Light</b>        | ≥ 7 (ISO 105/B02)   |
| <b>Backing Type</b>            | Graphlex®   | <b>Tiles per Box</b>                  | 16 - 4m <sup>2</sup> (25 cm x 100 cm ± 0.2%)                                |

**CE**  
06  
0336-CPD-8538


Cfl-s1

DB

EA4BBAC2

26 dB

EN 1307

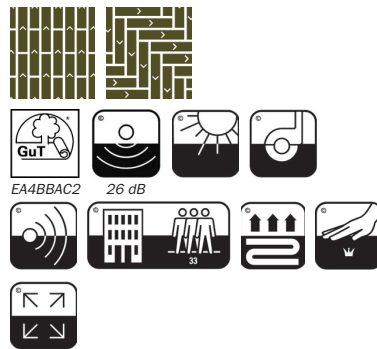

**Mission Zero:**  
our promise to eliminate  
any negative impact our company  
may have on the environment  
by the year 2020.

[www.interface.com](http://www.interface.com)

Interface Europe Ltd reserve the right to change or modify specifications