



Palette 2000

Interface®

Palette 2000



542133 Mythology, 542132 Fable, 542129 Fandango, 542136 Peony

Installed: Monolithic



542116 Teal, 542126 Peony, 542122 Chilli, 542135 Zest, 542118 Sunflower

Installed: Monolithic



542126 Peony, 542114 Windsor, 542139 Spring, 542113 Electric, 542120 Umber

Installed: Monolithic

Product Definition	Fusion Bonded Plain Level Cut Tile
Konstruktion	Gemusteter Fusion-Bonded-Velours
Descripción	Moqueta modular de pelo cortado unido por fusión con diseño nivelado
Description	Dalle en velours coupé nappé collé à motifs
Type	Fusion bonded gedessineerde velour
Descrizione	Velluto fusion bonded

Pile Material	100% Nylon
Polfasermaterial	100% Polyamid
Composición Fibra	100% poliamida
Composition	100% Polyamide
Poolmateriaal	100% nylon
Fibra	100% poliammide


Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinzetgewicht / Peso Felpa	950g/m ² ± 10%
Total Weight / Gesamtgewicht / Peso Total Poids total / Totaalgewicht / Peso Totale	4000g/m ² ± 10%
Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa	4,8 mm ± 0,3mm
Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale	8,1 mm ± 10%
Tufts per m² / Noppenzahl/m ² / Puntadas m ² / Densité du tuft par m ² / Aantal noppen per m ² / Densità Punti	272,000 ± 10%
Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo	PVC (with high pre-consumer recycled content)
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura	Heavy Contract (EN 1307) Class 33 / LC3

Style	54211
4m ² - 16 tiles per box (50 x 50 cm ± 0,2%)	

Radiant Panel / Schwerentflammbarkeit	(EN ISO 9239/1) Euroclass Bfl s1 (EN ISO 13501)
Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)

Dimensional Stability / Dimensionsstabilität	Estabilidad Dimensional / Stabilité dimensionnelle	≤ 0,2% (EN 986 / EN 986)
Estabilidad Dimensional / Stabilité dimensionnelle	Dimensioneale stabiliteit / Test Stabilità dimensionale	

Sound Absorption					
125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.00	0.02	0.07	0.21	0.39	0.48

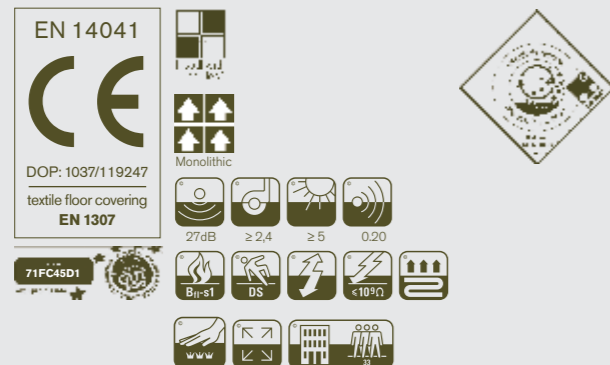

Light Value

Product	Colour No	Colour Name	L Value*	Y Value*
Palette 2000	542101	Pebble	51.41	19.63
	542102	Frost	44.57	14.24
	542103	Steel	40.79	11.73
	542104	Spelter	34.71	8.35
	542105	Concrete	28.13	5.51
	542106	Shadow	27.54	5.29
	542107	Ebony	13.39	1.63
	542108	Hurricane	29.78	6.15
	542109	Meteor	27.33	5.21
	542110	Cosmic	23.23	3.87
	542111	Reflection	32.16	7.15
	542112	Cobalt	26.58	4.95
	542113	Electric	17.98	2.51
	542114	Windsor	16.05	2.11
	542115	Hawaii	38.46	10.35
	542116	Teal	25.80	4.68
	542117	Abyss	28.90	5.80
	542118	Sunflower	51.73	19.90
	542119	Mango	40.69	11.67
	542120	Umber	32.81	7.45
	542121	Jaffa	41.48	12.17
	542122	Chilli	25.93	4.72
	542123	Maple	24.68	4.31
	542124	Crimson	19.56	2.88
	542125	Lipstick	20.94	3.23
	542126	Peony	25.99	4.74
	542127	Plush	18.24	2.57
	542128	Plum	23.51	3.95
	542129	Fandango	18.13	2.55
	542130	Sangria	15.38	1.98
	542131	Thistle	22.75	3.73
	542132	Fable	17.99	2.52
	542133	Mythology	20.50	3.12
	542134	Canary	71.03	42.23
	542135	Zest	58.82	26.83
	542136	Turf	27.38	5.23
	542137	Khaki	18.24	2.57
	542138	Gooseberry	60.39	28.56
	542139	Spring	43.97	13.82
	542140	Kiwi	47.79	16.63
	542141	Brulee	57.63	25.58
	542142	Spa	46.28	15.48
	542143	Aquarium	28.19	5.53
	542144	Pearl	57.64	25.58
	542145	Latte	40.98	11.85
	542146	Espresso	17.00	2.30
	542147	Malt	47.25	16.21
	542148	Henna	36.53	9.29
	542149	Mink	24.83	4.36
	542150	Arabica	17.91	2.50

* **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493

Lichtreflexionswerte: L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

Valores de Reflectancia de Luz: Valor L= L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

Valeurs concernant la lumière: Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

Licht waarden: L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493

Indici di riflettanza alla luce: Indice L= L secondo CIE L*a*b* colour space, Indice Y= Indici di riflettanza alla luce secondo la norma BS 8493

Environmental Data Sheet

Construction			
Yarn system	100% Nylon PA 6,6		
Backing system	Reinforced PVC backing with high recycled content		
Recycled Content	Total	Pre consumer	Post consumer
Product average	42.5%	42.5%	0.0%
Yarn	0.0%	0.0%	0.0%
Recycled content is the same for all colourways in the Palette collection.			
Carbon Footprint			
Global Warming Potential (kgs CO ₂ equivalents/sq meter)			
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:	25 kg CO ₂ eq./m ²	
	Delivery and installation:	0,9 kg CO ₂ eq./m ²	
	Use (10 years):	3.22 kg CO ₂ eq./m ²	
	End of life (waste to energy):	9.88 kg CO ₂ eq./m ²	
	TOTAL (10 years' lifetime):	39 kg CO ₂ eq./m ²	
CO ₂ compensation	Carbon neutral Cool Carpet® is optional		
Manufacturing			
Location	Yorkshire, UK		
Factory is certified according to ISO 14001 and ISO 9001			
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Monolithic - 3-4% installation waste		
	For reference: 2 metre wide broadloom typically generates 7-10 % installation waste		
	* In a rectangular building, installed before walls.		
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
Waste-to-Energy: Can be incinerated in appropriate waste to energy plant			
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour. Certificate no. 71FC45D1		
CRI (Carpet and Rug Institute)	Compliant to the requirements of the Green Label Plus programme.		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product has a type III Environmental Product Declaration, EPD-12CA64879.116.1		


Environmental Data Sheet

Recycled content – colour level						
Colourway	Total recycled content	Pre consumer recycled content	Post consumer recycled content	Yarn recycled content	Yarn pre consumer recycled content	Yarn post consumer recycled content
542101 Pebble	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542102 Frost	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542103 Steel	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542104 Spelter	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542105 Concrete	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542106 Shadow	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542107 Ebony	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542108 Hurricane	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542109 Meteor	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542110 Cosmic	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542111 Reflection	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542112 Cobalt	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542113 Electric	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542114 Windsor	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542115 Hawaii	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542116 Teal	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542117 Abyss	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542118 Sunflower	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542119 Mango	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542120 Umber	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542121 Jaffa	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542122 Chilli	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542123 Maple	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542124 Crimson	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542125 Lipstick	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542126 Peony	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542127 Plush	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542128 Plum	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542129 Fandango	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542130 Sangria	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542131 Thistle	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542132 Fable	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542133 Mythology	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542134 Canary	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542135 Zest	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542136 Turf	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542137 Khaki	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542138 Gooseberry	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542139 Spring	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542140 Kiwi	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542141 Brulee	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542142 Spa	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542143 Aquarium	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542144 Pearl	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542145 Latte	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542146 Espresso	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542147 Malt	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542148 Henna	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542149 Mink	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%
542150 Arabica	42,5%	42,5%	0,0%	0,0%	0,0%	0,0%



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want

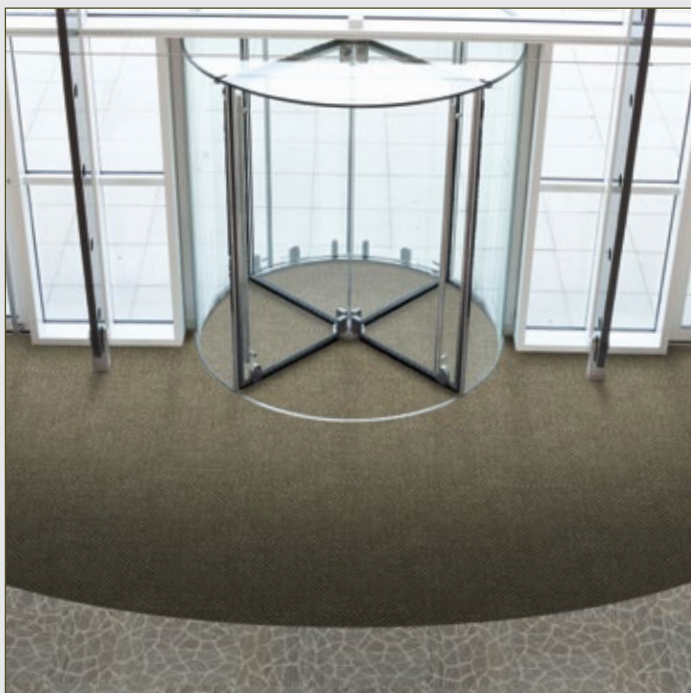

Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.