


# Polichrome





7598 Permanent Green, 7596 Spring, 7595 Gooseberry, 7558 Obsidian,  
7602 Obsidian Strait

Installed: Monolithic

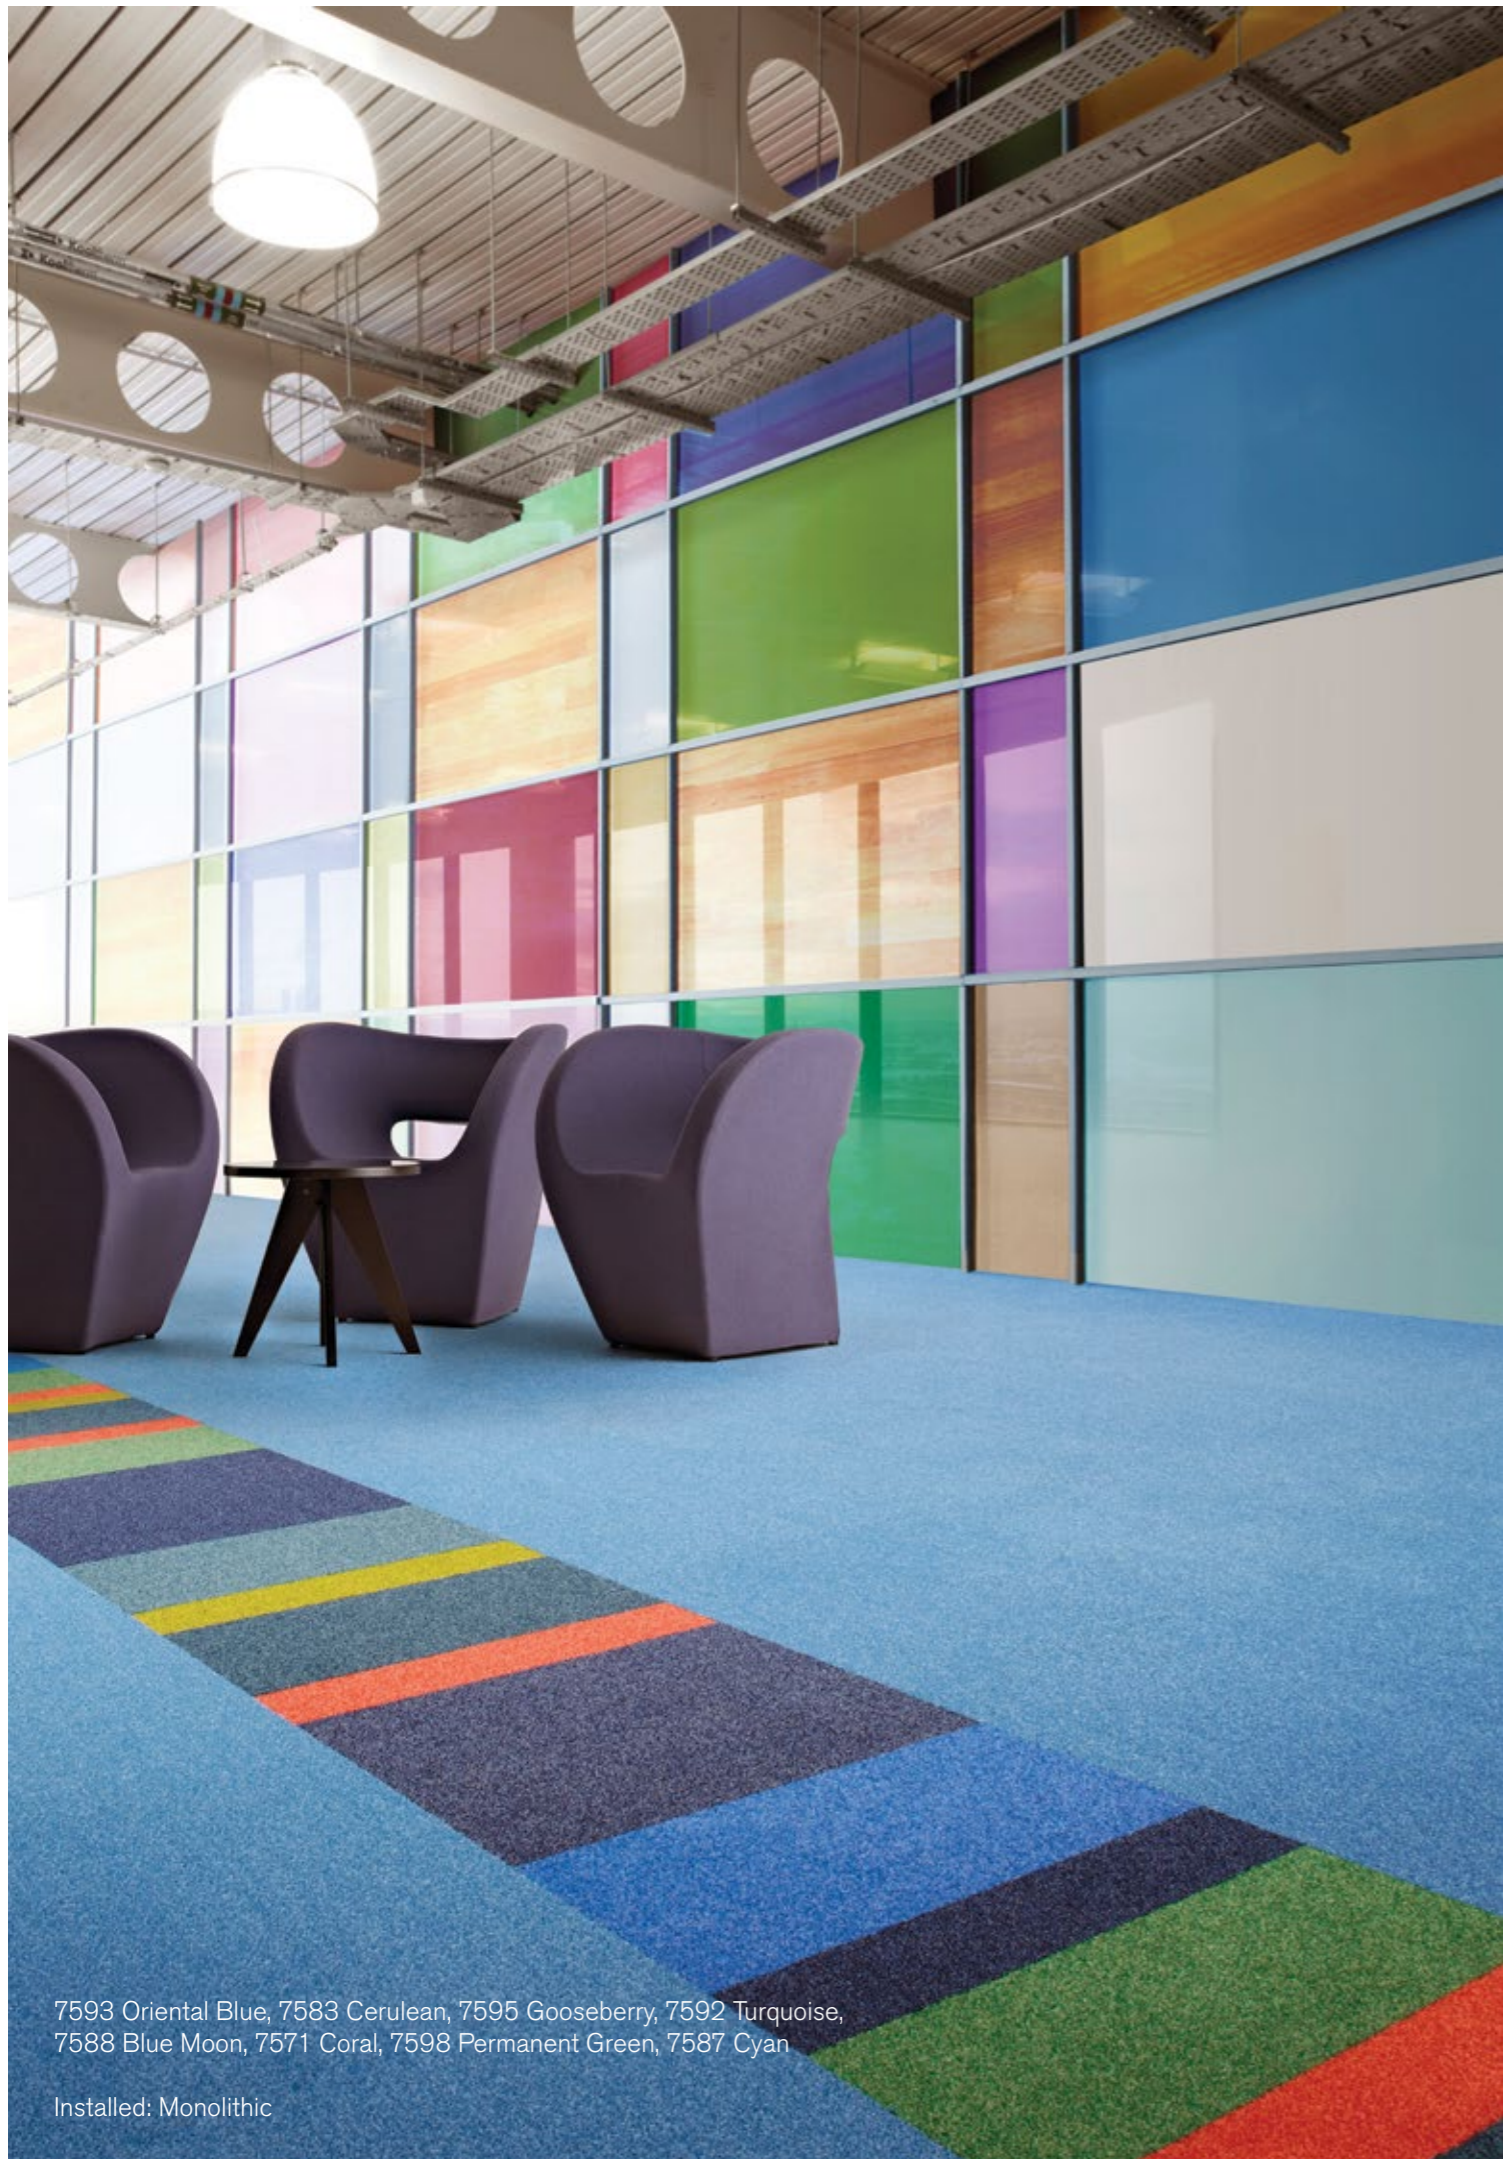

7593 Oriental Blue, 7583 Cerulean, 7595 Gooseberry, 7592 Turquoise,  
7588 Blue Moon, 7571 Coral, 7598 Permanent Green, 7587 Cyan

Installed: Monolithic



7568 Turmeric, 7565 Burnt Umbra, 7593 Oriental Blue, 7566 Espresso

Installed: Monolithic

<b>Product Definition</b>	Tufted Frieze Cut Tile
Konstruktion	Getuftete Frisé-Veloursqualität
Descripción	Moqueta modular de pelo cortado torsionado
Description	Dalles de moquette à velours twisté
Type	Getufte frisé
Descrizione	Velluto Tufted Frieze

	Groups 1,2 &4	Group 3
<b>Pile Material</b>	100% Nylon	100% BCF Solution Dyed Nylon
Polfasematerial	100% Polyamid	100% Polyamid garngefärbt
Composición Fibra	100% Poliamida	100% Poliamida BCF tintada en masa
Composition	100% Poyamide	100% Polyamide BCF Teint en masse
Poolmateriaal	100% Polyamide	100% Solution Dyed Polyamide BCF
Fibra	100% Poliammide	100% Poliammide BCF tinta in massa


<b>Pile Yarn Weight /</b> Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinzetgewicht / Peso Felpa	<b>(1)</b> 1100 <b>(2)</b> 1215 <b>(3)</b> 1050 <b>(4)</b> 1071g/m <sup>2</sup> ± 5%
<b>Total Weight / Gesamtgewicht /</b> Peso Total Poids total / Totaalgewicht / Peso Totale	<b>(1)</b> 4590 <b>(2)</b> 4665 <b>(3)</b> 4736 <b>(4)</b> 4569g/m <sup>2</sup> ± 5%
<b>Pile Height / Polschichtdicke /</b> Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa	<b>(1)</b> 4,2 <b>(2)</b> 4,0 <b>(3)</b> 4,1 <b>(4)</b> 3,8 mm ± 0,3mm
<b>Total Thickness / Gesamtdicke /</b> Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale	<b>(1)</b> 7,5 <b>(2)</b> 7,5 <b>(3)</b> 7,4 <b>(4)</b> 7,2 mm mm ± 0,5mm
<b>Tufts per m<sup>2</sup> / Noppenzahl/m<sup>2</sup> /</b> Puntadas m <sup>2</sup> / Densité du tuft par m <sup>2</sup> / Aantal noppen per m <sup>2</sup> / Densità Punti	172,200 ± 5%
<b>Backing Type / Rückenkonstruktion</b> / Soporte / Sous-couche / Ruguitvoering / Sottofondo	Graphlex®
<b>Wear Classification /</b> Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura	Heavy Contract (EN 1307) Class 33 / LC4

<b>Style</b>	<b>Group 1</b> 6075500405 <b>Group 2</b> 6075570405
4m <sup>2</sup> - 16 tiles per box (50 x 50 cm ± 0,2%)	<b>Group 3</b> 6075580405 <b>Group 4</b> 6075590405

<b>Radiant Panel /</b> Schwerentflammbarkeit	(EN ISO 9239/1) Euroclass Bfl s1 (EN ISO 13501)
<b>Hot Metal Nut</b>	Pass, low radius of effects of ignition (BS 4790)
<b>Dimensional Stability /</b> Dimensionsstabilität Estabilidad Dimensional / Stabilité dimensionnelle Dimensionele stabiliteit / Test Stabilità dimensionale	≤ 0,2% (EN 986 / EN 986)

125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.01	0.03	0.08	0.17	0.33	0.48

EN 14041




**Group 1**  
DOP: 1037/120319

**Group 2**  
DOP: 1037/120320

**Group 3**  
DOP: 1037/120322

**Group 4**  
DOP: 1037/120323

textile floor covering  
**EN 1307**




Monolithic

27dB

≥ 2,4

≥ 7

0,20



## Light Value

Product	Colour No	Colour Name	L Value*	Y Value*
<b>Polichrome</b>	7551	Abalone	56.4	24.3
	7552	Dolphin	36.4	9.2
	7553	Steel	31.3	6.8
	7554	Blue Whale	17.9	2.5
	7555	Gravel	49.0	17.6
	7556	Chinchilla	35.7	8.9
	7557	Anthracite	26.0	4.4
	7558	Obsidian	19.2	2.8
	7559	Concrete	50.7	19.0
	7560	Quartz	42.5	12.8
	7561	Greige	37.5	9.8
	7562	Bark	28.4	5.6
	7563	Hemp	45.0	14.5
	7564	Sienna	45.5	14.9
	7565	Burnt Umbra	30.7	6.5
	7566	Espresso	21.1	3.3
	7567	Linen	57.0	24.9
	7568	Turmeric	53.5	21.5
	7569	Ginger	52.5	20.6
	7570	Garam Masala	34.6	8.3
	7571	Coral	45.8	15.1
	7572	Orange	40.9	11.8
	7573	Opera	26.0	4.7
	7574	Red	27.9	5.4
	7575	Pink	38.6	10.4
	7576	Soft Magenta	35.2	8.6
	7577	Fata Morgana	25.2	4.5
	7578	Bittersweet	18.8	2.7
	7579	Bougainville	28.0	5.5
	7580	Purple Rain	29.8	6.1
	7581	Lilac	24.3	4.2
	7582	Velvet	20.0	3.0
	7583	Cerulean	34.9	8.5
	7584	Ultramarine	26.2	4.8
	7585	Lobelia	27.0	5.1
	7586	Indigo	19.6	2.9
	7587	Cyan	42.9	13.1
	7588	Blue Moon	27.5	5.3
	7589	Classic Blue	26.0	4.4
	7590	Tourmaline	19.0	2.8
	7591	Teal	40.9	11.8
	7592	Turquoise	35.6	8.8
	7593	Oriental Blue	28.9	5.8
	7594	Green Lake	25.5	4.6
	7595	Gooseberry	48.0	16.8
	7596	Spring	53.2	15.1
	7597	Sycamore	45.7	15.1
	7598	Permanent Green	42.5	12.8
	7599	Concrete Lane	52.7	20.8
	7600	Bark Stripe	31.4	6.8
	7601	Anthracite Stripe	26.5	4.9
	7602	Obsidian Strait	19.7	2.9

\* **Light Value:** L Value = L according to CIE L\*a\*b\* colour space, Y Value = Light Reflectance Value according to BS 8493

**Lichtreflexionswerte:** L-Wert = L gemäß CIE L\*a\*b\* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

**Valores de Reflectancia de Luz:** Valor L = L según CIE L\*a\*b\* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

**Valeurs concernant la lumière:** Valeur L = L faisant référence à la méthode CIE L\*a\*b\* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

**Licht waarden:** L Waarde = L volgens CIE L\*a\*b\*kleuruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493

**Indici di riflettanza alla luce:** Indice L = L secondo CIE L\*a\*b\* colour space, Indice Y = Indice di riflettanza alla luce secondo la norma BS 8493

# Environmental Data Sheet

Construction			
Yarn system	100% BCF PA 6		
Backing system	Graphlex®		
Recycled Content	Total Recycled Content	Pre consumer	Post consumer
Product average	<b>40,19%</b>	40,19%	0,00%
Yarn	<b>0,00%</b>	0,00%	0,00%
Recycled content is the same for all colourways.			
Carbon Footprint			
Global Warming Potential (kgs CO2 equivalents/sq meter)			
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:	16.9 kg CO <sub>2</sub> eq./m <sup>2</sup>	
	Delivery and installation:	0.33 kg CO <sub>2</sub> eq./m <sup>2</sup>	
	Use (10 years):	2 kg CO <sub>2</sub> eq./m <sup>2</sup>	
	End of life (waste to energy):	4.9 kg CO <sub>2</sub> eq./m <sup>2</sup>	
	<b>TOTAL (10 years' lifetime):</b>	<b>24.13 kg CO<sub>2</sub> eq./m<sup>2</sup></b>	
CO <sub>2</sub> compensation	Carbon neutral Cool Carpet® is optional		
Manufacturing			
Location	Scherpenzeel, NL		
Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990			
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Monolithic - 3-4% installation waste		
	For reference: 2 metre wide broadloom typically generates 7-10 % installation waste		
* In a rectangular building, installed before walls.			
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
	Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles		
	Waste-to-Energy: Can be incinerated in appropriate waste to energy plant		
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour. GUT PRODIS Certificate no. B7BB9CDC (Grp 1) BE7E98D9 (Grp 2) S4EDB6FD (Grp 3) 4F43DCB1 (Grp 4)		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product has a type III Environmental Product Declaration, <a href="#">EPD-IFF-2011611-E</a>		

Recycled content – colour level						
Colourway	Total recycled content	Pre consumer recycled content	Post consumer recycled content	Yarn recycled content	Yarn Pre consumer recycled content	Yarn Post consumer recycled content
7551 Abalone	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7552 Dolphin	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7553 Steel	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7559 Concrete	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7560 Quartz	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7563 Hemp	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7565 Burnt Umbra	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7567 Linen	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7568 Turmeric	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7569 Ginger	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7570 Garam Masala	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7571 Coral	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7572 Orange	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7573 Opera	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7575 Pink	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7576 Soft Magenta	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7577 Fata Morgana	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7579 Bougainville	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7580 Purple Rain	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7581 Lilac	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7583 Cerulean	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7584 Ultramarine	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7585 Lobelia	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7587 Cyan	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7588 Blue Moon	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7591 Teal	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7592 Turquoise	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7593 Oriental Blue	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7594 Green Lake	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7595 Gooseberry	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7596 Spring	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7597 Sycamore	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7598 Permanent Green	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7554 Blue Whale	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7574 Red	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7578 Bittersweet	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7582 Velvet	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7586 Indigo	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7590 Tourmaline	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7555 Gravel	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7556 Chinchilla	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7557 Anthracite	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7558 Obsidian	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7561 Greige	40,24%	40,24%	0,00%	0,00%	0,00%	0,00%
7562 Bark	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7564 Siena	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7566 Espresso	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7589 Classic Blue	43,17%	43,17%	0,00%	0,00%	0,00%	0,00%
7599 Concrete Lane	43,63%	43,63%	0,00%	0,00%	0,00%	0,00%
7600 Bark Stripe	43,63%	43,63%	0,00%	0,00%	0,00%	0,00%
7601 Anthracite Ave	43,63%	43,63%	0,00%	0,00%	0,00%	0,00%
7602 Obsidian Strait	43,63%	43,63%	0,00%	0,00%	0,00%	0,00%


THIS DATA CAN BE USED TO COMPARE CARPET PRODUCTS WITHIN THE INTERFACE PORTFOLIO. COMPARISON WITH OTHER PRODUCTS WOULD REQUIRE USE OF SAME METHODOLOGIES.

Compliance to Green Building Schemes	
BREEAM (UK and international)	<p>BRE Green Guide Ratings:</p> <ul style="list-style-type: none"> <li>Office - B rated</li> <li>Education - B rated</li> <li>Health Care - B rated</li> <li>Retail (by fashion) - A+ rated</li> </ul> <p>Potential contribution to following categories and credits:</p> <ul style="list-style-type: none"> <li>Hea 02 - Indoor air quality – minimising sources of air pollution</li> <li>Hea 05 - Acoustic Performance</li> <li>Mat 01 - Life Cycle Impacts</li> <li>Mat 05 - Designing for robustness</li> <li>Wst 01 - Construction Waste Management</li> </ul>
LEED 2009 US	<p>Potential direct or indirect contribution to following categories and credits:</p> <p>Indoor Environmental Quality</p> <ul style="list-style-type: none"> <li>Credit 4.1 Low Emitting Materials: Adhesive &amp; Sealants</li> <li>Credit 4.3 Low Emitting Materials: Carpet Systems</li> </ul> <p>Materials and Resources</p> <ul style="list-style-type: none"> <li>Credit 2.1 Construction Waste Management</li> <li>Credit 4.1 Recycled content</li> <li>Credit 5.1 Regional Materials</li> </ul> <p>Innovation and Design</p> <ul style="list-style-type: none"> <li>Credits 1-4 1 Pilot Credit 43, Certified Products</li> </ul>
HQE (FR)	<p>Potential direct or indirect contribution to several points within following targets:</p> <ul style="list-style-type: none"> <li>2. Integrated choice of products and construction materials</li> <li>3. Low site nuisance</li> <li>9. Acoustic comfort</li> <li>10. Visual comfort</li> <li>11. No unpleasant smells</li> <li>12. Sanitary quality of areas</li> <li>13. Sanitary air quality</li> </ul>
DGNB (D)	<p>Potential direct or indirect contribution to following criterion</p> <p>ENVIRONMENTAL QUALITY</p> <ul style="list-style-type: none"> <li>ENV1.2 Local Environmental Impact</li> </ul> <p>ECONOMIC QUALITY</p> <ul style="list-style-type: none"> <li>ECO1.1 Building-Related Lifecycle Costs</li> <li>ECO2.1 Efficient Use of Space</li> </ul> <p>SOCIOCULTURAL AND FUNCTIONAL QUALITY</p> <ul style="list-style-type: none"> <li>SOC1.2 Indoor Air Quality</li> <li>SOC1.3 Acoustic Comfort</li> </ul> <p>TECHNICAL QUALITY</p> <ul style="list-style-type: none"> <li>TEC1.5 Ease of Cleaning and Maintenance</li> <li>TEC1.6 Ease of Dismantling and Recycling</li> </ul>



## TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want

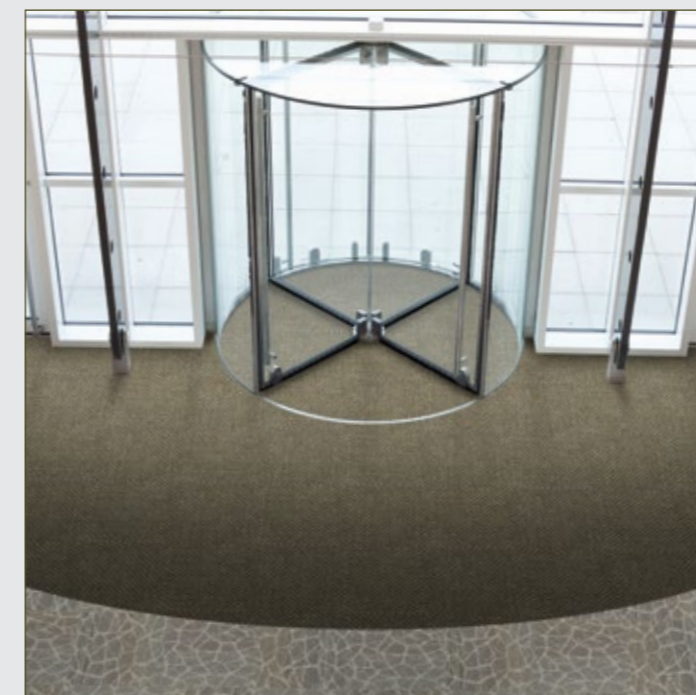

## Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.