


Brick Effect Render



A range of decorative brick effect renders for use with
The JUBIZOL External Wall Insulation System

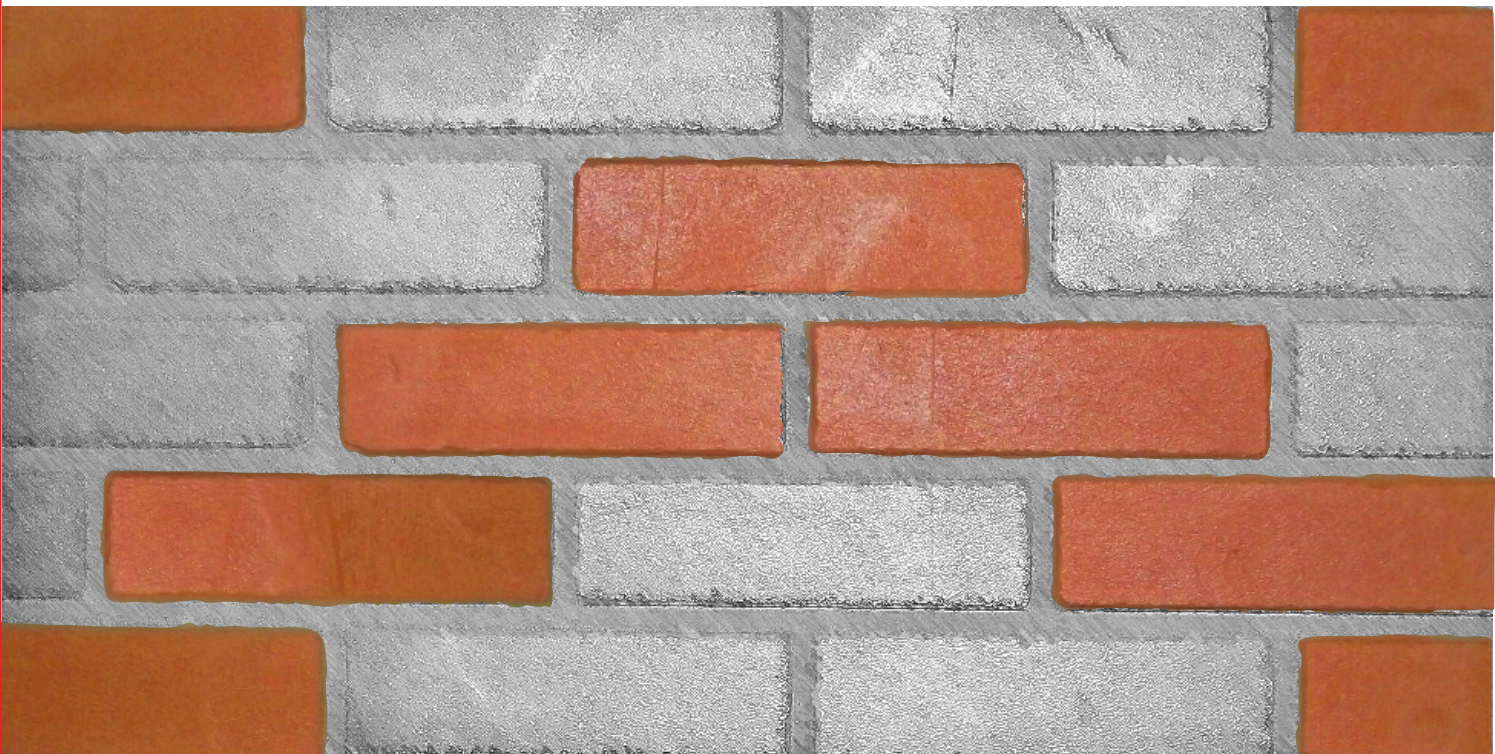

Brick Render Colours

BR01	Bath	BR06	Red Sandstone
BR02	Cotswold	BR07	Royal
BR03	Sand	BR08	Terracotta
BR04	Natural	BR09	Dark Red
BR05	Ochre	BR10	Light Grey
		BR11	Dark Grey


Brick Mortar Colours

BR03	Sand
BR10	Light Grey
BR11	Dark Grey

BR08 - Terracotta



BR07 - Royal

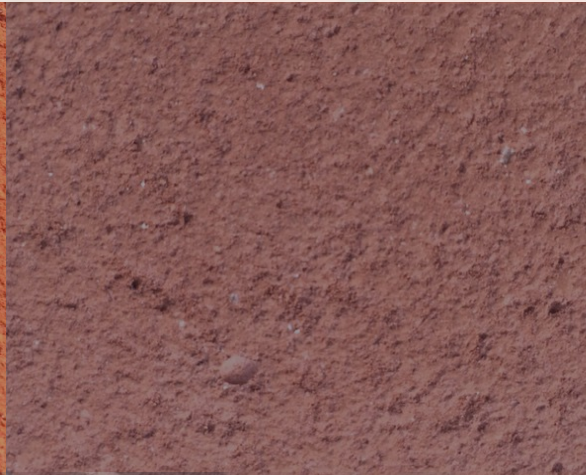

BR09 - Dark Red



- Onto dry JUB JLM Base Coat, apply a single coat of the JUB Brick Render (Brick mortar colour) to a uniformed thickness of 4-6mm and level out.
- Allow the Brick Render Mortar basecoat to pick up until it is in a 'Green' condition, set but not completely cured.
- Apply the Brick Render Topcoat to a thickness of approximately 6mm and allow to set for 3-8 hours, weather dependent.
- Before cutting the mortar joints ensure that the whole surface is rubbed over with a DRY sponge / sponge float.
- The horizontal joints should be accurately measured out first and cut accordingly. Then the vertical joints should be measured and cut.
- Apply RenderShield clear breathable protection coat.

JUB Brick Render & Mortar is available in 25kg bags - Coverage rate of 3.3 square metres per bag at 6mm.

Please contact the JUB Technical Department for more information.

