





Kilwaughter Chemical Co Ltd has been an established mineral and quarry processor since 1939. With 25 years bagged render manufacturing experience producing the market leading K Rend brand, they are committed to excellence, innovation and teamwork in providing you with the highest quality products and technical service support.

The K Rend brand represents excellence in:

- HIGH QUALITY, EXTENSIVE PRODUCT RANGE** 
- EXPERT TECHNICAL SUPPORT**
- INNOVATION**
- EXPERIENCE**
- UK & IRELAND DISTRIBUTION**

K Rend external renders are designed to give a durable weatherproof coating and a natural finish.

BUILDING ON OUR REPUTATION



K Rend Manufacturing Facility

HIGH QUALITY, EXTENSIVE PRODUCT RANGE



Through an uncompromising commitment to quality, excellence, integrity and teamwork, K Rend provide the best tailored products and solutions to satisfy the most demanding requirements. Market leading K Rend is one of the first render manufacturers to have achieved the prestigious Kitemark license to BS EN 998:2010. The Kitemark® is the world's premier symbol of trust, integrity and quality ensuring that vital product safety and performance requirements are met. Kitemark® schemes are voluntary, illustrating commitment to providing customers with the highest standard of quality products and service.

EXPERT TECHNICAL SUPPORT

K Rend offer advice and guidance when identifying the best solution to satisfy your individual needs. By utilising a wealth of technical information from specification detailing to technical product data sheets, K Rend's expertly trained Technical Support Team are able to provide efficient detailed advice, specifications and on-site support.

INNOVATION

Pride is taken in product innovation and developing new products. A continuous development process responds to ever-changing industry's needs and expectations. The K Rend manufacturing plant has some of the most advanced production facilities in Europe.

EXPERIENCE

Highly trained K Rend staff are available to share their wealth of industry and product knowledge with you.

UK & IRELAND DISTRIBUTION

An extensive merchant network provides excellent UK and Ireland distribution to meet your application needs, wherever you are. Prompt delivery is assured.

Kilwaughter Chemical Co Ltd take pride in innovative product design, however the impact on the environment is also important. Environmental considerations are an integral part of their business practice. Therefore in developing the K Rend range, care has been taken to ensure that from the earliest stages of product design through to manufacturing, modern technologies have been utilised to help reduce their impact on the environment. Five areas of particular attention are:

RESPONSIBLE MANUFACTURING

RECYCLING

ENERGY EFFICIENCY

MONITORING BIODIVERSITY

ON-SITE RESTORATION

Kilwaughter Chemical Co Ltd's Environment Management System is certified to ISO 14001:2004.

K Rend Silicone Roughcast White & Arran
Co.Down



K REND WITH SILICONE TECHNOLOGY FOR WATER RESISTANCE THAT WORKS



K Rend Silicone FT, Ivory
Co. Dorset



K Rend Silicone FT, Ivory
Co. Antrim

WATER REPELLENT
LOW MAINTENANCE
ALLOWS STRUCTURE TO BREATHE
NATURAL LOOKING FINISH
EXTENSIVE COLOUR RANGE

The K Rend silicone range incorporates silicone water repellents as an integral part of the cement based render system. This silicone technology imparts a high degree of water repellency to the render surface whilst allowing water vapour to pass through the render allowing the substrate to breathe.

The water repellent surface ensures a freshly rendered appearance for a prolonged period. The finish is drier and thus more resistant to algae growth and the natural phenomenon of limebloom.

PRODUCT RANGE

K Rend Silicone Thin Coat Product overview page 7 - 8	K Rend Textured Finish Product overview page 9 - 10	K Rend Dash Receiver Product overview page 11	K Rend Roughcast Product overview page 12
Silicone TC 15 Hand applied	Silicone FT Hand applied	Silicone Dash Hand applied	Silicone Roughcast Hand applied
Silicone TC 30 Hand applied	Silicone Spray E Grade Spray or hand applied	Overcoating Silicone Dash Spray or hand applied	
Primer TC Brush, roller or spray	Silicone K1 Spray or hand applied	Silicone Spray Dash Spray or hand applied	
NCS (Natural Colour System)	K1 Spray Spray or hand applied		



K Rend Silicone FT, Ivory
Co. Antrim

K REND... THE PERFECT FINISH

K Rend Brick Rend Product overview page 13	K Bead Product overview page 14	K Rend Base Coat Product overview page 15	K Rend Complementary Products & Services
<p>Brick Rend Hand applied</p>	<p>Durable uPVC Beads</p> <p>R7 Acrylic Bonding Aid</p> <p>Accelerator Liquid additive to accelerate curing time</p>	<p>Standard UF Base Spray or hand applied</p> <p>HP12 Base Spray or hand applied</p> <p>HP14 Base Spray or hand applied</p> <p>HPX Base Spray or hand applied</p> <p>UF Fibre Base Spray or hand applied</p>	<p>K Rend Product Training see page 16</p> <p>Alkali Resistant Reinforcing Mesh</p> <p>K RANGE</p> <p>Also available:</p> <p>K Mix Construction Mortars</p> <p>K Lime Natural Hydraulic Lime</p>



K Rend Silicone FT, Ivory
Co. Antrim



K Rend Silicone E Grade White,
Salmon Pink & Cream

Mortars

K Post

K Rend Tyrolean

K Rend Traditional White
Mortar

Complementary Products:

Range of tools




m-tec M300 Spray Machine

K Rend offer an algae resistant additive which gives enhanced resistance against algae growth.

All additives are contained in the mix in powder form, therefore only clean water and thorough mixing are required. Please ask the Technical Support Centre for further advice.

In line with our policy of continuous product development, we reserve the right to change technical data without notice.

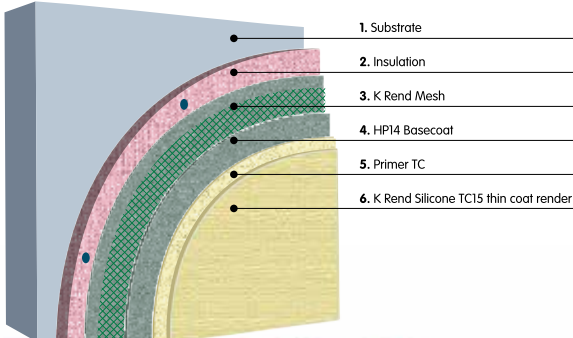SILICONE THIN COAT (TC)

Silicone TC	Primer TC	
<p>Silicone TC is a ready to use organic resin render which is applied to provide a low maintenance textured finish. It is available in different textures and a wide variety of colours. Prior to application the substrate should be primed using Primer TC.</p> <p>Require:</p> <p>Silicone TC 15: 2.5 kg / sq m approx. Silicone TC 30: 5.0 kg / sq m approx.</p> <p>Product classification according to BS EN 15824:2009 Coating Material DIN 18558 – P Org 1</p> <p>A water-dilutable product for exterior and interior use.</p> <p>Water vapour permeability – Category V 2; Water absorption – Category W 3; Adhesion - 0.65 MPa; Thermal Conductivity: λ 10, dry (P=50%) = 0.83, λ 10, dry (P=90%) = 0.93;</p> <p>Reaction to fire - Class B-s2,d0</p> <p>Product Classification (DIN 18558) Coating Material DIN 18558 – P Org 1</p>	<p>Primer TC is a low odour, ready to use primer which is quick and easy to apply by brush, roller or spray. It is available in a wide range of colours which are co-ordinated to the colour of the Silicone TC topcoat.</p> <p>Primer TC should be used after the application of K Rend base coat and before Silicone TC.</p> <p>Require: Primer TC – 0.25 kg / sq m approx.</p> <p>Composition: A water-dilutable Acrylic resin dispersion.</p>	<p>The Thin Coat range is particularly suitable where lightweight render systems are required, such as an external wall insulation system (illustrated below).</p>   



All full colour illustrations shown in this brochure are as accurate as the printing process will allow. It is important that a sample is obtained as we recommend colours be verified against K Rend Thin Coat samples before ordering.

...ORGANIC RESIN RENDER

NCS - Natural Colour System

The Silicone Thin Coat Range uses the NCS System to help customers visualise special colours for their project. NCS - Natural Colour System is a logical colour notation system which builds on how humans see colour.

The NCS, international standard, is the only colour system that describes colour exactly as we see it. Any colour can be defined within the NCS system and given a precise notation. The NCS System is a precise language for the communication of colour. It improves communication between design and production industries and helps to ensure that the customer receives exactly what they want to see. The extensive array of colours available can be communicated effectively in a logical manner, which is easy and simple to use. Please contact our Technical Support Centre to choose a special colour from our NCS colour fan (below).




The Six Elementary Colours

NCS was created to solve the problems associated with communicating colour requirements, therefore each colour has its own distinct structure that forms the notation vocabulary of NCS. Each colour can be described by its degree of similarity to the elementary colours, NCS colour notations are therefore based on how much a given colour seems to resemble these six elementary colours: White W, black S, yellow Y, red R, blue B and green G.



The NCS Colour Space


Within this three dimensional model all imaginable surface colours can be plotted and given an NCS notation. A notation represents a specific colour percept out of the millions of surface colours that we can see and describes the colour visually. It is not depending on limitations caused by pigments, light rays or nerve signals that have given rise to this perception.

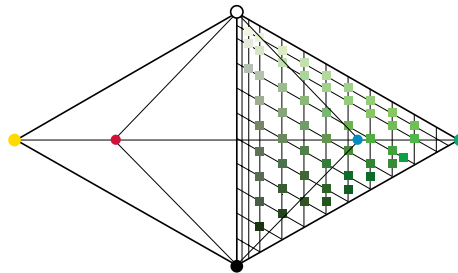

An NCS Notation is constructed using three properties that visually describe a colour; hue and nuance (blackness and chromaticness). In order to more easily pinpoint colours within the NCS Colour Solid, the NCS Colour Circle and NCS Colour Triangle are used.

The NCS colour circle


Hue is how similar the colour is to the elementary colours yellow, red, blue and green in the NCS Colour Circle.



© The NCS - Natural Colour System and the NCS notations are the property of the Scandinavian Colour Institute AB. © SCI 2004

The NCS colour triangle

Nuance is determined by the blackness and chromaticness of a colour. Blackness is how dark the colour is and chromaticness is how chromatically strong the colour is, which is represented in the NCS Colour Triangle. Each hue in the colour circle holds a colour triangle. The below illustrates the nuances within the hue G30Y.




An example: S 1070-Y10R

NCS Notation S 1070-Y10R describes a colour that is included in the standard collection (S) and lies in between the yellow (Y) and red (R) colour span with:

- 10% perceived red (the remaining 90% going towards yellow)
- 10% perceived Blackness
- 70% perceived Chromaticness

This means the colour looks like a quite strong yellow. NCS describes the colour of any material. With numeric colour codes, so called NCS Notations, such as NCS S 1080-Y70R, any colour can be described precisely.

A pictorial example:

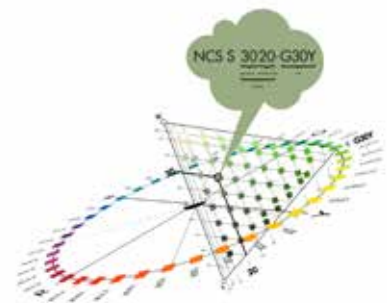

EXTERNAL WALL INSULATION SYSTEM

K Rend now hold a BBA Cert (13/5080) which refers to:

K Rend External Wall Insulation System 1 comprising mechanically fixed enhanced expanded polystyrene (EPS) boards with a mesh-reinforced basecoat render. The system is for application to the outside of external walls of masonry or dense concrete construction in new or existing domestic and non-domestic buildings. For more info contact our Technical Team T: 028 2826 0766.



SILICONE SCRAPED TEXTURE

Silicone FT	Silicone Spray E Grade	NEW Silicone K1
<p>Silicone FT incorporates silicone technology and provides a fine texture finish.</p> <p>Require: 32kg / sq m approx. nominal 16mm thickness</p> <p>Over Base Coat Require: 18kg / sq m approx. nominal 10mm thickness</p> <p>Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.63</p>	<p>Silicone Spray E Grade is designed for use with most render spray machines. It is ideal for larger projects where the speed of machine application can offer time saving benefits.</p> <p>One coat Require: 26 - 32kg / sq m approx. nominal 16 - 20mm thickness</p> <p>Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.63</p>	<p>Silicone K1 incorporates silicone technology. It is suitable for use with most render spray machines. It is ideal for larger projects where the speed of machine application can offer time saving benefits. Suitable for hand application also.</p> <p>One coat Require: 1.6 kg / mm thick / sq m nominal 16 - 20mm thickness</p> <p>Kitemark Classifications: Compressive strength: CS II Capillary water Absorption category: W 2 Thermal Conductivity: P=50% - 0.39</p>



K Rend silicone scraped texture renders form an attractive range of one coat applications plastered directly on to block work. They can also be used as a finish in conjunction with a K Rend Base Coat.

To achieve the required finish, float to a level surface then scrape the complete surface evenly with a scraping tool when the render is set but not hard, removing 2mm, to produce a uniform texture.

This type of application is suitable for Ashlar cutting.



Silicone FT


Plastering Test Panel

For all products it is recommended that a test panel (ideally 2m²) be produced for inspection by the customer (client, architect, etc.). Work should not commence until the customer is satisfied with the texture and general appearance of the product. The test panel should be prepared well in advance of work commencing. Applicators should be familiar with product water requirement, handling characteristics, setting and hardening times. These may vary according to background, temperature and humidity.

NOTE: For all products **“Require”** figures are approximate, take no account of wastage and may vary according to substrate and application technique.


K Rend is manufactured using natural raw materials. Subtle texture and colour variations may occur during the application process. It is recommended products are selected from actual samples. Large site samples are available which can be applied under normal site conditions to give a representative sample.

Textured Finish 1 Coat (2 passes)

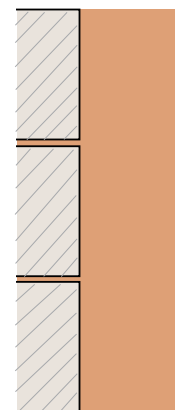

Finish coat 16 mm

Textured Finish 2 Coats

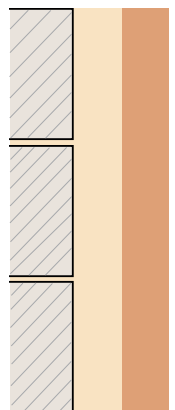

Base coat 10 mm
Finish coat 10 mm

Please seek advice from our Technical Support Centre for a detailed specification.

...THE PERFECT FINISH

NEW K1 Spray

K1 Spray is designed for use with most render spray machines. It is ideal for larger projects where the speed of machine application can offer time saving benefits. Suitable for hand application also.

One coat Require:

26 - 32kg / sq m approx.
nominal 16 - 20mm thickness

Kitemark Classifications:

Compressive Strength: CS II

Capillary Water Absorption

Category: W2

Thermal Conductivity:

P=50% - 0.44

Silicone Scraped Texture Standard 20 Colours



White



Buttermilk



Polar White



Stone



Champagne



York



Cream



Powder Blue



Salmon Pink



Pewter Grey



Terracotta



Grey



Ivory



Sterling White



Arran



Sandstone



Green



Oatmeal



Cinnamon



Fintry Stone

Above: 20 standard Scraped Texture colours. Special colours are available from a customisable pallet, upon request from our Technical Support Centre.

All full colour illustrations shown in this brochure are as accurate as the printing process will allow. It is important that a sample is obtained as we recommend colours be verified against K Rend Scraped Texture samples before ordering.



K Rend Silicone FT, White
Co. Down


SILICONE DASH RECEIVER

Silicone Dash	Overcoating Silicone Dash		Silicone Spray Dash
<p>Incorporating silicone technology, Silicone Dash is normally applied over K Rend Base Coats as a background surface for dry dash or roughcast finishes.</p> <p>Require: 10-15kg / sq m approx. nominal 6-10mm thickness</p> <p>Kitemark Classifications: Compressive Strength: CS III Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.47</p>	<p>Specifically designed for refurbishment, Overcoating Silicone Dash is light and easy to use and gives excellent coverage over existing dry dash finishes. Surfaces to be over coated should be free from contamination (algae, oil and paint) and may require priming with R7 liquid acrylic prior to application.</p> <p>Require: 8-10kg / sq m approx. nominal 8-10mm thickness</p> <p>Kitemark Classifications: Compressive Strength: CS II Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.26</p>		<p>This silicone enhanced dash receiver is designed to be spray applied by machine to increase the speed of application. Normally applied over a K Rend Base Coat, providing a surface for dry dash finishes.</p> <p>Require: 10-15kg / sq m approx. nominal 6-10mm thickness</p> <p>Kitemark Classifications: Compressive Strength: CS III Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.45</p>



K Rend Silicone Dash Receivers are used over K Rend Base Coats. They are polymer modified and through coloured. These products are designed to have excellent workability and open time properties when used as backgrounds for 4-12mm dry dash or roughcast finishes. The finished thickness is normally determined by the size of the aggregate. Apply a uniform butter coat and throw the aggregate onto the surface while the render is still green.

Dash receiver

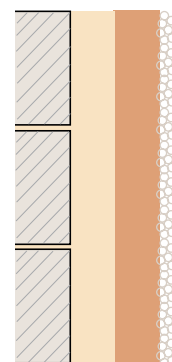

Base coat 8-10mm
Dash receiver 8mm
Dry dash

Please seek advice from our Technical Support Centre for a detailed specification.


SILICONE ROUGHCAST (Wet dash)

Silicone Roughcast		PLASTERING TEST PANEL	
<p>Silicone Roughcast incorporates silicone technology to give excellent water resistant qualities. It is applied over a Silicone Dash receiver.</p> <p>Dash receiver require: 9-12kg / sq m approx. nominal 6-8mm thickness</p> <p>Roughcast require: 8-13kg / sq m approx.</p> <p>BSI Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 1.03</p>		<p>For all products it is recommended that a test panel (ideally 2m²) be produced for inspection by the customer (client, architect, etc.). Work should not commence until the customer is satisfied with the texture and general appearance of the product. The test panel should be prepared well in advance of work commencing. Applicators should be familiar with product water requirement, handling characteristics, setting and hardening times. These may vary according to background, temperature and humidity.</p> <p>NOTE: For all products Require figures are approximate, take no account of wastage and may vary according to substrate and application technique.</p>	



K Rend Silicone Roughcast may be used as an alternative to dry dash, providing an attractive through coloured render finish. Base Coat is first applied to the block-work, when a receiving coat of Dash receiver is still green, throw Roughcast onto the surface. The Dash receiver and Roughcast must be the same colour.


Roughcast

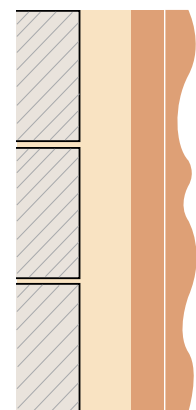

Base coat 8-10mm
Dash receiver nominal 6mm
Roughcast

Please seek advice from our Technical Support Centre for a detailed specification.

BRICK REND
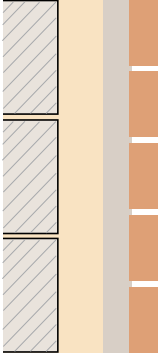
<p>Brick Rend</p> <p>Brick Rend provides the benefits of flexibility and water resistance. This render is ideal as part of an external wall insulation system.</p> <p>Mortar Layer Require: 10-15kg / sq m approx. nominal 6-8mm thickness</p> <p>Face Layer Require: 5-10kg / sq m approx. nominal 3-5mm thickness</p> <p> Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.44</p>	<p>Brick Rend</p>  <p>Base coat 8-10 mm Mortar coat 8 mm Brick coat 3-5 mm</p> <p>K Rend Brick Rend is an attractive brick effect render, particularly suitable for refurbishment projects where new brick work cannot be used. It is normally applied to K Rend Base Coats in two different coloured coats, wet on wet. The top coat is then cut through to expose the mortar layer. The mortar joints create a brick effect finish.</p> <p>Detailed guidance and assistance including site training and samples can be arranged on request.</p> <p>Please seek advice from our Technical Support Centre for a detailed specification.</p>
--	---



Mortar Coat: Keighly Grey **Brick Coat:** Orian Red



Mortar Coat: Light Grey **Brick Coat:** Carmel Yellow



Mortar Coat: Light Grey **Brick Coat:** Winchet Red




Mortar Coat: Mellow Grey **Brick Coat:** Stockport Red

Left: A sample of Brick Rend colours available. Special colours can be created upon request.

All full colour illustrations shown in this brochure are as accurate as the printing process will allow. It is important that a sample is obtained as we recommend colours be verified against K Rend Brick Rend samples before ordering.



Brick Rend Application

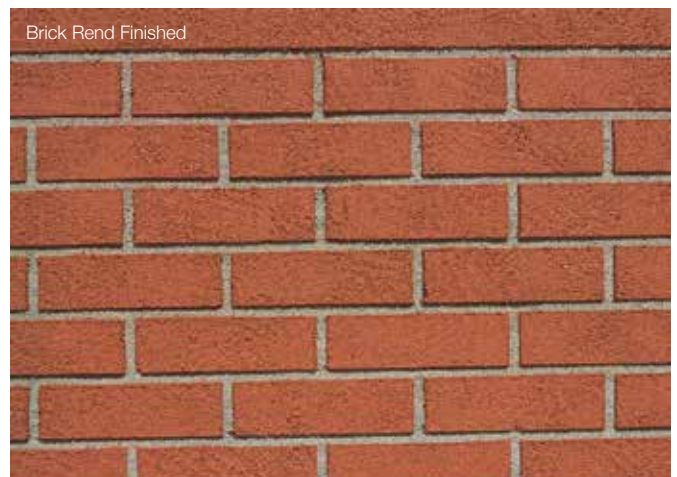

Brick Rend Finished

K BEAD

K BEAD Durable uPVC Beads

K Bead is a range of durable uPVC beads designed to be used with all K Rend renders. They are ideal for damp, wet or corrosive environments or where plaster drying times may be extended.

K Bead's are produced to the highest quality standards and checks at time of manufacture. They are fully compliant with European building regulation and the international Quality system ISO 9001:2000.

Performance benefits

K Bead is a tough performing range of beads. They are easy to handle, safe to cut and simple to apply, with little or no waste.

All beads within the range have a raised aris, making them ideal for both scraped and floated finishes and helps applicators apply surface finish to an exact crisp point. K Bead have a high resistance to corrosion, staining and impact.

Colour options

In addition to the K Bead standard range of white and ivory beads, a choice of coloured beads is available upon request.

Minimum order quantities may apply.

Please contact our Technical Support Centre for more information.



Stop Bead (available in 4, 6, 8, 11 & 15 mm)



Expansion Bead




Drip Bead




Angle Bead (available in 4, 6, 8, 11 & 15 mm)



Bellcast Bead

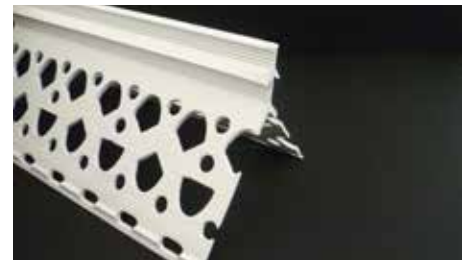

New Heavy Duty Angle Bead

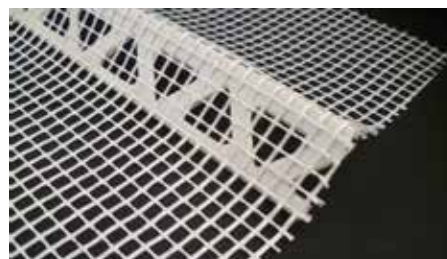

Impact Bead with Mesh



Angle Bead with Mesh

K Rend R7 Acrylic

A modified Acrylic emulsion used to improve the adhesion of K Rend renders to difficult substrates, where the background does not provide sufficient key or has poor suction characteristics. The material is usually diluted before use and may be used in various ways, including as a priming coat, as a gauging liquid and to prepare polymer modified stipple coats.



Available in 5kg or 20kg jars.

K Rend R10

K Rend R10 is a modified acrylic bonding coat designed to improve the adhesion of K Rend renders to difficult substrates, where the background does not provide sufficient key or has poor suction characteristics. It can improve a difficult substrate and prepare the background for application of K Rend one coat renders.



Available in 20kg buckets.

K Rend Accelerator

A liquid additive used to reduce the waiting time before scraping K Rend scraped texture renders. It accelerates the curing time meaning that the render may be scraped earlier, enabling a faster job completion. It may be used in cold conditions to improve the scraping time (however all winter working precautions still apply). It has no effect on the appearance of the render.




Available in 20L jars.

Standard UF Base	HP12 Base	HP14 Base	HPX Base
<p>A high quality general purpose sprayable base coat with excellent workability qualities, designed to be used over block work as a primary coat for K Rend finishes and is ideal as the background for thin coat acrylic finishes.</p> <p>Coverage: 1.8kg / mm thick / sq m</p> <p>Require: 14-18kg / sq m approx. nominal 8-10mm thickness</p> <p>🏆 Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.43</p>	<p>HP12 Base uses 'High Polymer' technology for a cost effective, enhanced performance on difficult substrates. It is ideal as a stipple coat or for dense backgrounds and has increased water resistance and adhesion. Incorporation of Alkali Resistant Reinforcing Mesh may be required.</p> <p>Coverage: 1.8kg / mm thick / sq m</p> <p>Require: 8-11kg / sq m approx. nominal 4-6mm thickness</p> <p>🏆 Kitemark Classifications: Compressive Strength: CS IV Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.72</p>	<p>HP 14 Base uses "High Polymer" technology for a cost effective, enhanced performance onto a wide variety of substrates. It is designed as the ideal background for thin coat organic resin render such as Silicone TC.</p> <p>Coverage: 1.8kg / mm thick / sq m</p> <p>Require: 8-11kg / sq m approx. nominal 4-6mm thickness</p> <p>🏆 Kitemark Classifications: Compressive Strength: CS II Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.41</p>	<p>Ultra high performance render incorporating high polymer technology and fibres. Used on unusual substrates requiring greater flexibility and adhesion, often incorporating an Alkali Resistant Reinforcing Mesh.</p> <p>Coverage: 1.5kg / mm thick / sq m</p> <p>Require: 6-9kg / sq m approx. nominal 4-6mm thickness</p> <p>🏆 Kitemark Classifications: Compressive Strength: CS III Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.36</p>

UF Fibre Base
<p>Has all the qualities of Standard UF Base, but with increased impact resistance and tensile strength.</p> <p>Coverage: 1.8kg / mm thick / sq m</p> <p>Require: 14-18kg / sq m approx. nominal 8-10mm thickness</p> <p>🏆 Kitemark Classifications: Compressive Strength: CS III Capillary Water Absorption Category: W2 Thermal Conductivity: P=50% - 0.35</p>


All Base Coats can be hand or spray applied.



K Rend Base (Scratch) Coats are polymer modified and cement based to ensure flexibility and strength. Scratch coats require only the addition of water and five minutes mixing time. Normally applied in one coat as a backing for K Rend finishes. Rule off to a flat finish and scratch lightly to provide a key for the next coat.

For unusual substrates, seek technical advice.

Base Coat



Base coat
8-10mm

K Rend Silicone FT, Cream Co. Antrim



K Rend Product Training

K Rend offer Product Training at the manufacturing facility, Larne, N. Ireland. The course is open to anyone. It is a one day course, 75% of which is hands-on based training and 25% is classroom technical learning. On completion you receive:

- K Rend Certificate
- Samples & Literature Pack
- Hi-vis Vest
- Pen & Van Livery
- Opportunity to become a 'Recommended K Rend Applicator'

Airport transfers are free of charge. Breakfast & lunch are provided. Courses run monthly throughout the year.

For available dates contact:

E: ProductTraining@Kilwaughter.com


T: 028 2826 0766



Above: Application of K Rend products

RESEARCH	DESIGN & SPECIFICATION		ARCHITECT INFORMATION
<p>Research and development is a continuous process that provides new answers to the changing needs and expectations of customers. Driven by market requirements and the emerging opportunities presented through the development of new technology, K Rend are committed to excellence in providing new innovative products.</p> <p>A team of Chemists and Technicians conduct extensive prototype testing on all new product designs whilst continuously assessing potential improvements to existing products by utilising innovative technologies. This keeps K Rend up to date with all new requirements including product performance, legislation and building design.</p>	<p>Technical advice & specifications are available on Tel: 028 2826 0766</p> <p>K Rend external renders are designed to give a durable weatherproof coating and a natural finish. A low maintenance finish will add value to any building. To maximise the benefits of K Rend, the following points may be considered in designing a render finish. Water should be prevented from continually running down facades. A generous overhang or eave should be designed together with sufficient drips at all sills and copings.</p> <p>Angles Angles may be formed using K Bead PVC angle and stop beads.</p> <p>Expansion Joints Render expansion joints must follow structural movement breaks. For other expansion joints refer to BS EN 13914:2005.</p> <p>A detailed instruction leaflet and health and safety information are enclosed with every pallet of render.</p>	<p>Some construction materials may be susceptible to alkali attack; fittings and surfaces adjacent that are likely to be damaged during rendering should be protected.</p>	<p>Specification K Rend is a member of the Royal Institute of British Architects' 'National Building Specification Plus' system. Please visit www.thenbs.com to create a specification. Alternatively visit the Specification Writer on our website: www.K-Rend.co.uk</p> <p>Continuous Professional Development (CPD) K Rend offer Architects RIBA CPD approved training via 2 seminars:</p> <ul style="list-style-type: none"> • New British Standards for External Render • Principles of Render Application Over Masonry Substrates <p>This seminar counts towards Architects RIBA CPD annual training requirement. Seminars are also open to other contractors. Please contact us to arrange a seminar at your premises:</p> <p>E: CPD@Kilwaughter.com T: 028 2826 0766</p>

K Rend Production Facility

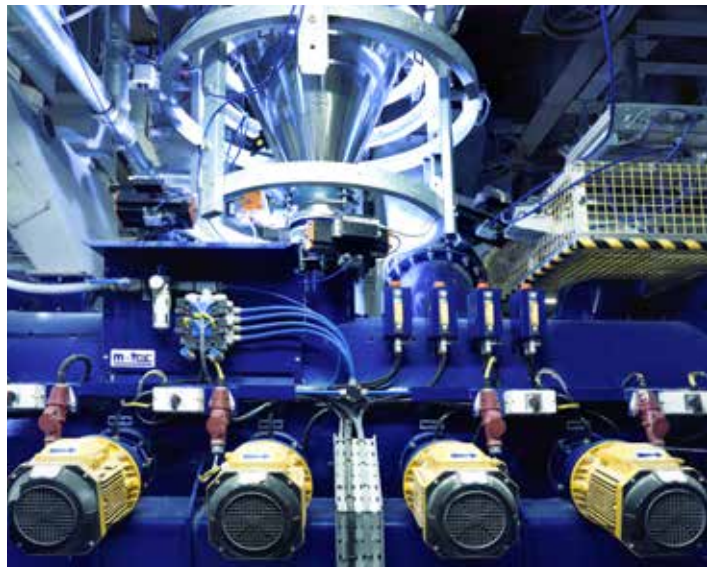

GENERAL INSTRUCTIONS DESIGN & MAINTENANCE

BUILDING		MAINTENANCE	K RANGE
<p>Packaging</p> <p>K Rend bagged renders are normally packed in 25Kg sacks, 40 sacks per tonne, loaded 70 per 1.75 tonne pallet.</p> <p>K Rend Thin coat renders are normally packed in 25kg tubs, 40 tubs per tonne, loaded 30 per 750 kg pallet.</p> <p>All render sacks and tubs must be protected from frost and direct sunlight on site. Shelf life is approximately 1 year if stored in dry conditions, protected from frost and sunlight, in original unopened packaging, from date of manufacture.</p> <p>It is important to note that all K Rend renders are non-returnable.</p> <p>Site conditions</p> <p>Temperature range 5°C - 35°C</p> <p>K Rend renders must not be applied to frozen or thawing supports. If the coating must be applied in adverse weather conditions, it is essential to protect both the working area and finish before and after application.</p> <p>Areas between day work beads should be applied without a break.</p> <p>All areas of the building should be protected from rainwater for at least 24 hours after application of K Rend.</p>	<p>Do not allow down-pipes, sills and scaffolding to throw water on to setting render.</p> <p>Ensure that all copings and sills have sufficient drips to prevent any runs down the facade. This includes a drip cut under all mortar joints between copings.</p> <p>To prevent the appearance of lime-bloom, do not render in cold, damp weather.</p> <p>K Rend render, in common with all finishes, should be protected from all potential on site damage.</p> <p>Scraped texture - to achieve a uniform colour, all areas must be scraped at the same stage of readiness or hardness.</p> <p>Roughcast finish - do not go back over cured areas to fill in misses, as this can lead to inconsistency of colour.</p>	<p>Where general staining occurs, a warm power wash with a suitable detergent can be used to clean up the K Rend finish.</p> <p>Care must be taken to adjust the pressure of the power washer to ensure that the render surface is not damaged during the procedure (this is not suitable for dry dash finishes).</p> <p>An annual coat of fungicidal wash can prevent algae from growing on weather prevailing facades, which can be prone to algae by remaining wet over long periods. Please ask the Technical Support Team for further advice.</p> <p>K Rend is compatible with a range of anti-graffiti treatments. Please visit the Anti-graffiti Association website: www.theaga.org.uk/ or call our Technical Support Team for advice.</p> <p>If a change of colour is required at a later date, K Rend is a suitable substrate for a good quality masonry paint.</p>	<p>Also available:</p> <p>K Mix Construction Mortars</p> <p>K Lime Natural Hydraulic Lime Mortars</p> <p>K Post</p> <p>K Rend Tyrolean</p> <p>K Rend Traditional White Mortar</p> <p>Complementary Products:</p> <p>Range of tools</p> <p>Alkali Resistant Reinforcing Mesh</p> <p>m-tec M300 Spray Machine</p> <p>Please call our Technical Support Team for further information.</p> <p>In line with our policy of continuous product development, we reserve the right to change technical data without notice.</p>

Kilwaughter Quarry, the On-Site Source of Aggregate and Sand





One Company... Three Divisions

www.K-Rend.co.uk

KREN



Construction

Silicone Renders and Construction Mortars

KILWAUGHTER LIME



Industry & Agriculture

Calcium Carbonate Powders, Limestone Sands, Aggregates & Minerals

K LANDSCAPES



Landscaping

Natural Stone Landscaping Products



Certificate No. FM85394



BSEN998-1 & BSEN998-2
Licence No. 514639



BSEN15824
Licence No. 580349



Certificate No: 06/0248



Kilwaughter Chemical Co Ltd

For UK Sales

9 Starbog Rd, Lame, Co. Antrim, N. Ireland, BT40 2TJ
Tel: 028 2826 0766 Fax: 028 2826 0136
Email: Sales@K-Rend.co.uk
www.K-Rend.co.uk

For ROI Sales

Classis, Ovens, Co. Cork, Ireland
Tel: 021 4872733 Fax: 021 4871705
Email: Sales@K-Rend.co.uk
www.K-Rend.co.uk