


HZ

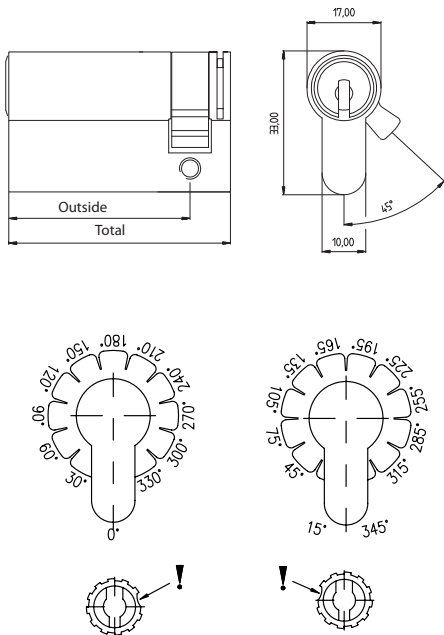

Standard setting: 30° to the right with marking point viewed from front side of cylinder.

- 1) Unscrew cover on rear side of cylinder using a coin or screwdriver.
- 2) Remove coupling and cam hub.
- 3) Align cylinder on the template and turn cam to the desired position.
- 4) Slide cam hub into the housing as per the diagram.
- 5) Insert coupling into the cam hub.
- 6) Screw cover back on until it closes even with the housing.

For all mortise door locks in Europrofile for key operation on one side of the door. The cam operates the the latch and/or bolt of the door lock with key latch operation function.

Housing supplied in solid natural brass with nickel plating
Reversible key made from nickel silver
Emergency key function
(Please order emergency key separately, see chapter "Special Functions and keys").

2 reversible keys (Specify separately, see "Special Functions and Keys" for options)
Plastic key clip in dark red for Kaba penta, in dark blue for all other systems
1 cylinder fastening screw M5 x 65 mm
Security Card for ownership registration and ordering duplicate keys
Installation and Maintenance Instructions

Premier Systems: 6	Kaba penta	7	Kaba quattro pluS	12	Kaba gemini pluS
Patent expired systems		4	Kaba quattro S	2	Kaba gemini S
Old systems		3	Kaba quattro ¹⁾	1	Kaba gemini ¹⁾
Dealer systems		5	Kaba experT ²⁾	19	Kaba maTriX ²⁾
Old dealer system				9	Kaba gemini T ²⁾

Lengths Standard - from 30 to 100 mm in 5 mm steps
Special over 100 mm

DF	Duplo function				
BAZ	Construction key	BAZ3	Construction key 3	GF	Emergency key
FL360	Freewheel cam		Special Cams	KT	Electrical contact
FZG	Freewheel cam for gear opened (panic) locks				
RB	Relative cam movement			SSW	Weather protection
DIN.ZS	DIN18252 certified: pulling protection			DIN	Drilling protection
VDSB.ZS	VdS certified: Pulling and drilling protection			Vdsb	Drilling protection
				ST	Steel housing

NI - Nickel plated	MS - Brass natural	
--------------------	--------------------	--

BH - brown light	MP - Brass polished	CR - Chrome standard
BM - brown medium	MSA - Brass antique	CRM - Chrom dull
BD - brown dark		CRP- Chrome polished
NIC - chemically nickel plated		
GO - gold plated		

System Code.Cylinder Type.Length(function).Surface finish.Option

Example:
6.HZ.30.NI = penta.single cylinder.30.nickel plated

¹⁾ Kaba gemini and Kaba quattro are only offered for existing master key systems.

²⁾ Kaba expertT, Kaba maTriX and Kaba gemini T are only sold to authorized dealers.

Please note that certain options, finishes and dimensions may be subject to extended factory lead times. Please contact our office via email on sales.uk@kaba.com or telephone (0) 870 000 5625.