


LINEAR GLOBE - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Globe - 6 mm round holes
Perforation percentage	9,1 %
Perforation pattern	G1

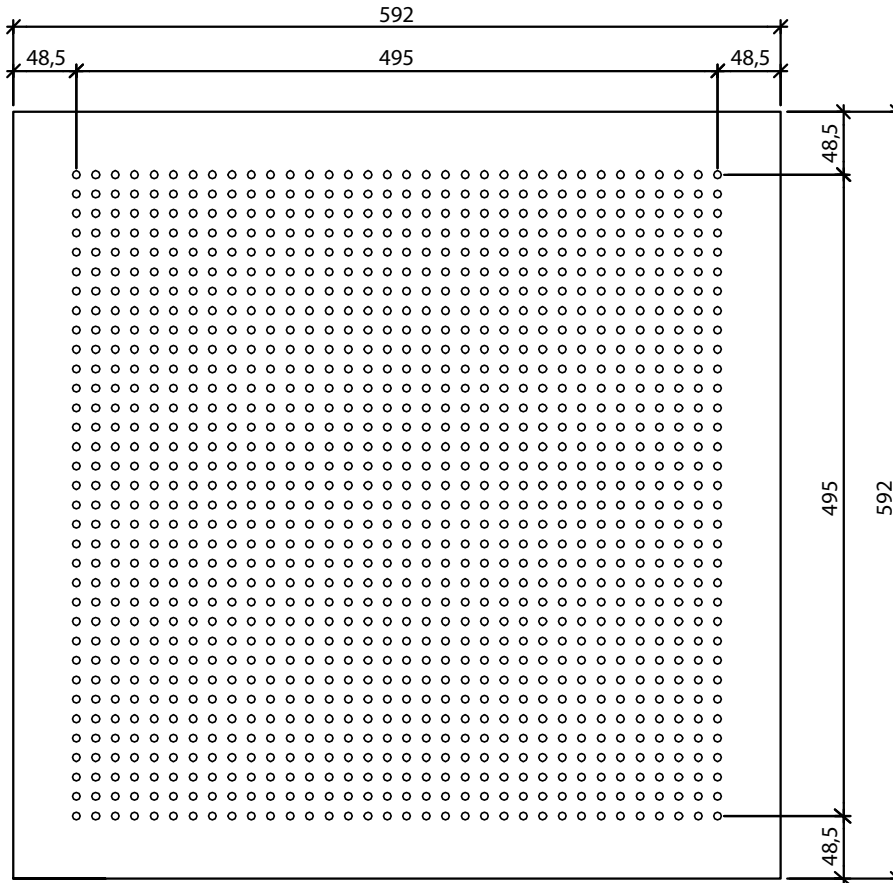

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,40	0,60	0,70	0,60	0,50	0,40

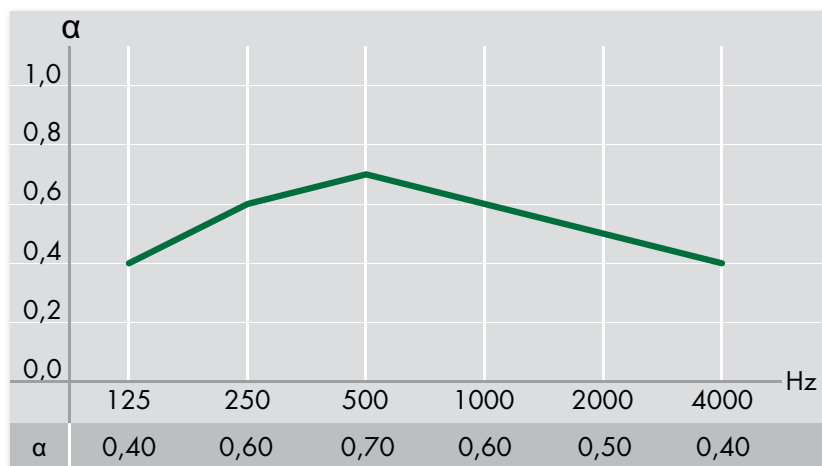


At 200 mm and with 0 mm mineral wool

LINEAR GLOBE - PERFORATION DATA

This overview shows the special perforation patterns, that Linear Globe is available with in 600 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).


G2F



G2T




G3F



G3T



G4F




G4T




G2L




G4L2



G3L



G4T2



G4L

