


## LINEAR MICRO - PERFORATION DATA


### PERFORATION DETAILS

Perforation type	Micro - 3x3 mm square holes
Perforation percentage	10,2 %
Perforation pattern	M1

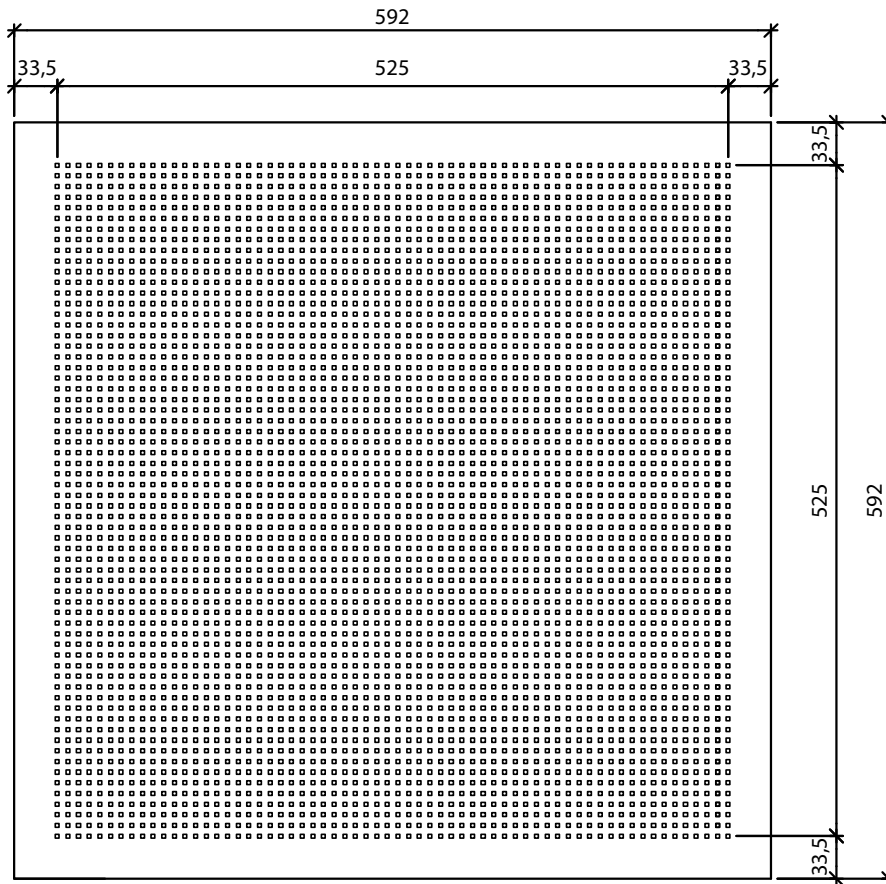

### ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
$\alpha_p$	0,40	0,55	0,65	0,60	0,60	0,55

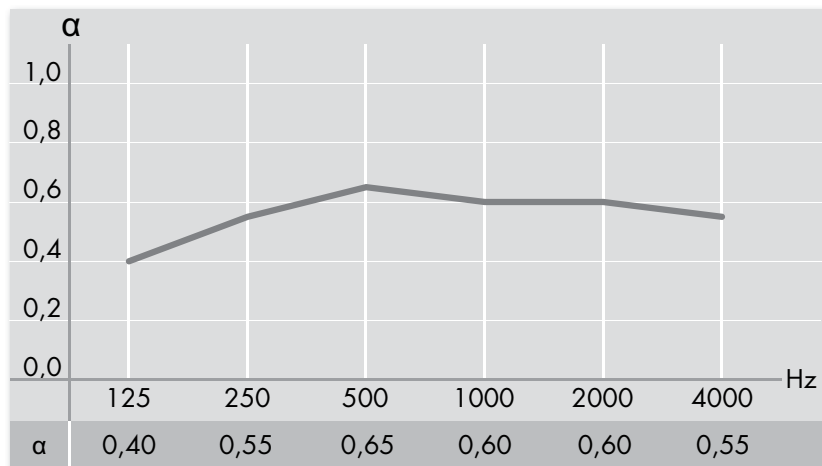


At 200 mm and with 0 mm mineral wool

## LINEAR MICRO - PERFORATION DATA

This overview shows the special perforation patterns, that Linear Micro is available with in 600 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).


M2F



M2T




M3F



M3T



M4F




M4T



M2L




M4L2



M3L



M4T2



M4L

