


MARKANT GLOBE - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Globe - 6 mm round holes
Perforation percentage	10,2 %
Perforation pattern	G1

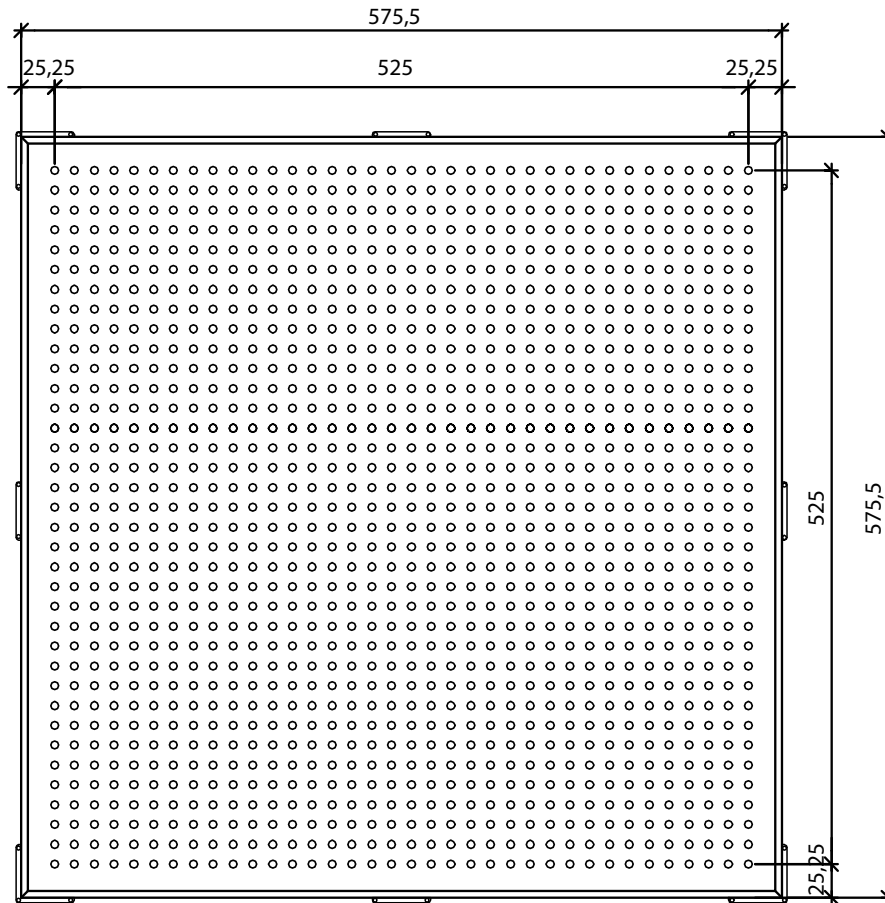

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,45	0,65	0,80	0,65	0,55	0,45

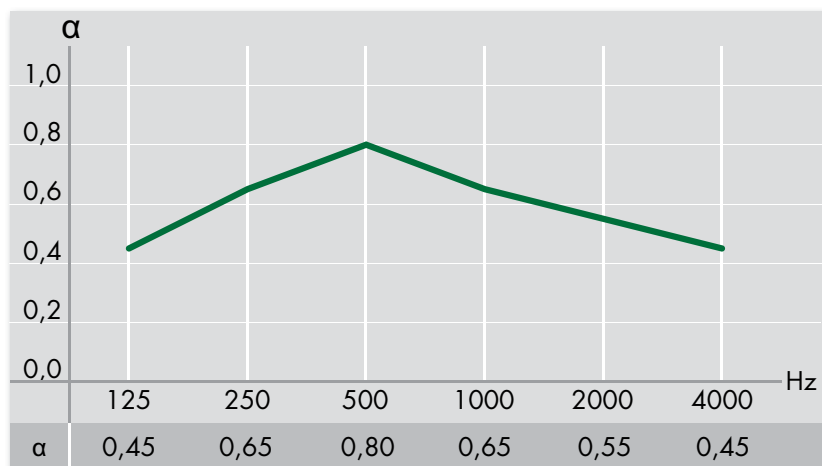


At 200 mm and with 0 mm mineral wool

MARKANT GLOBE - PERFORATION DATA

This overview shows the special perforation patterns, that Markant Globe is available with in 600 and 1200 mm format. Please note that minimum quantity can occur in 1200 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).

G2F



G2T




G1F



G2T




G3F




G3T




G2F

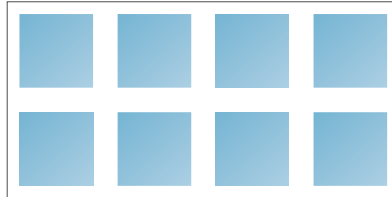

G3T

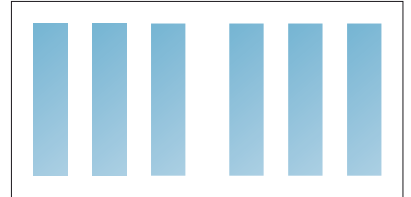


G4F



G4T



G3F

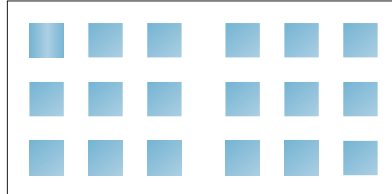


G4T




G2L




G4L2



G4F

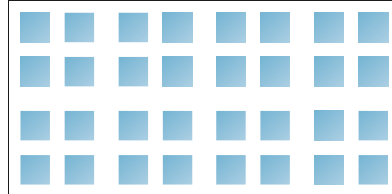


G4L2

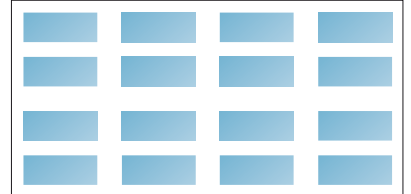

G3L




G4T2




G2L




G4T2

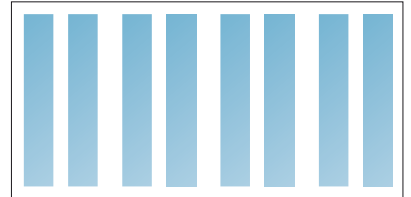

G4L



G3L

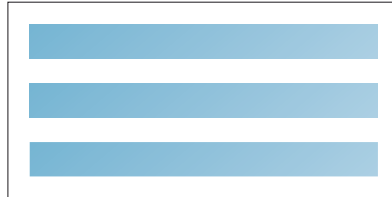

G4L

