


MARKANT MICRO - PERFORATION DATA


PERFORATION DETAILS

Perforation type	Micro - 3x3 mm square holes
Perforation percentage	10,2 %
Perforation pattern	M1

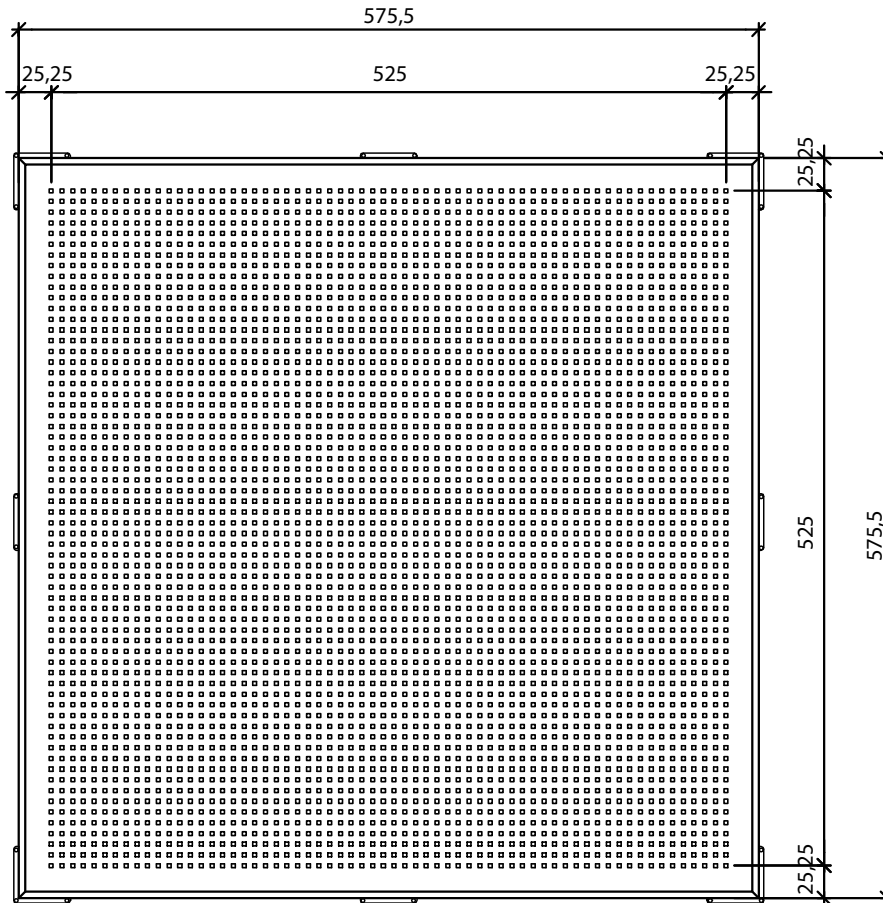

ABSORPTION COEFFICIENTS

Frequency (Hz)	125	250	500	1000	2000	4000
α_p	0,40	0,55	0,65	0,60	0,60	0,55

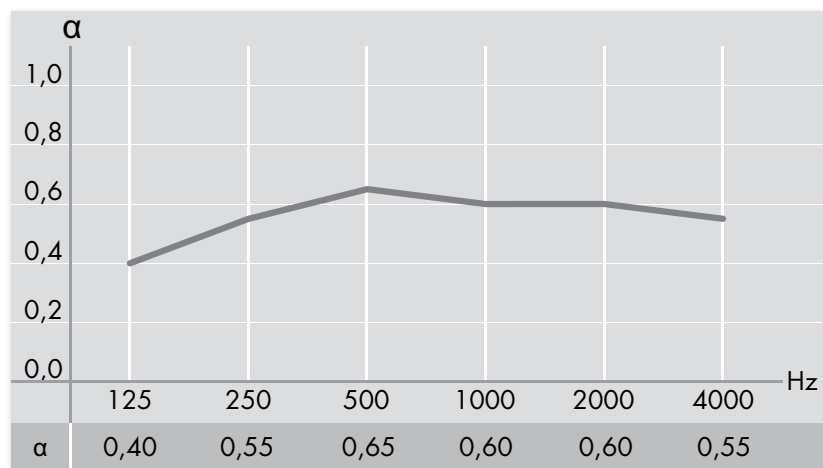

At 200 mm and with 0 mm mineral wool

MARKANT MICRO - PERFORATION DATA

This overview shows the special perforation patterns, that Markant Micro is available with in 600 and 1200 mm format. Please note that minimum quantity can occur in 1200 mm format. For more detailed drawings of a specific perforation pattern please contact our [local representative](#).

