

## LED Floodlight

### 30W LED Floodlight



### Product Overview

The Kosnic LED Floodlights make ideal replacements for energy-hungry halogen lighting. Suitable for outdoor use, the range offers affordable products with high lumen efficiency and a long life.


### Features

- Save up to 85% energy usage compared to traditional halogen fittings.
- Class I, IP65
- High lumen output.
- Long life of 40,000h.
- Instant start.
- Negligible UV output.
- Mercury free.

## Specifications


Product Code	KFLDHS30Q65-W30-BLK	KFLDHS30Q65-W65-BLK
Nominal Power (W)	30	30
Voltage	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Current (mA)	137	137
Protection	Class I, IP65	Class I, IP65
Connection	1m of H05RN-F 3x1.0mm <sup>2</sup> cable.	1m of H05RN-F 3x1.0mm <sup>2</sup> cable.
Luminous Flux (lm)	2100	2400
CCT	3000K Warm White	6500K Day Light
Nominal Lifetime (h)	40000	40000
Beam Angle (°)	110	110
Dimmable	No	No
Switching Cycles	50000	50000
Warm-up time to 60% Φ (S)	Instant full light	Instant full light
Suitable for accent lighting	No	No
Width (mm)	185	185
Depth (mm)	181	181
Mounting Surface to Face (mm)	132	132
Mercury (mg)	0	0
Rated Power (W)	30.0	30.0
Rated Luminous Flux (lm)	2100	2400
Rated Lifetime (h)	40000	40000
Power Factor	0.95	0.95
Rated Peak Candelas (cd)	780	900
Lumen Maintenance Factor at Nominal Lifetime	0.80	0.80
SDCM of CCT	<6	<6
CRI	81	85
Start Time (s)	0.45	0.45
Ambient Temperature Range (°C)	-20 to 40	-20 to 40

## Energy Label

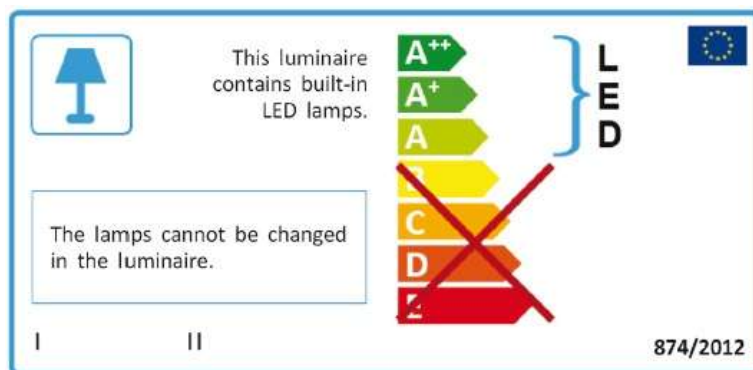

(Note: I = Manufacturer Name, II = Product Code)

### Dimensions

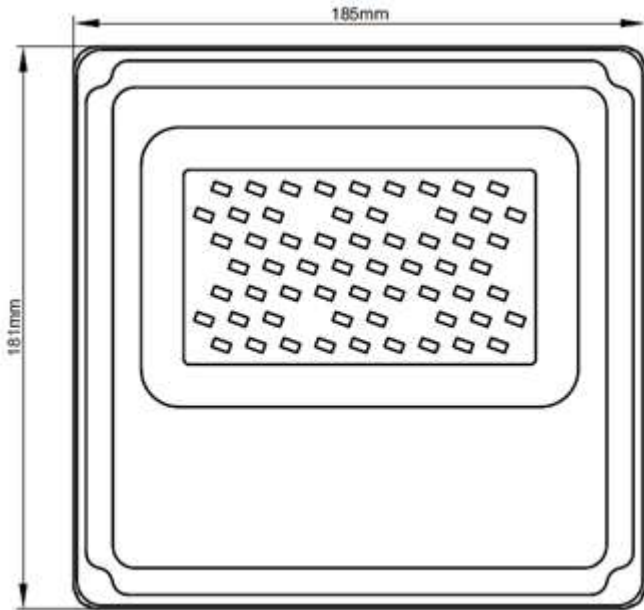

### Photometric Information

3000K

6500K

