

# LD41



Miniature LED Uplight and Wall Light

Data sheet



Design: PJC Lighting Project: Demelza Hospice Product: LD41 in handrail

Our smallest exterior LED the LD41 is a very tough, compact fitting containing the latest in LED technology. It can be run up to 1.7W, and comes with a choice of beam angles making it suitable for a wide range of applications.

## Key Features

- Minimal bezel and recess depth
- Can be specified with frosted glass for indicator applications, a wide beam works best for this effect
- Machined from a solid billet of stainless steel 316
- No visible fixings. Fixing options include O-rings and a first fix sleeve or bonding directly into the mounting surface
- Integral anti-wicking barrier increases protection against moisture ingress due to incorrect IP rated cable connections
- Available with Switch, 0-10V, DMX, Dali or Mains dimmable drivers



## Specification

### Applications



Beam Angles	12°, 31°, 48°, 36° x 12°			
LED type	1 x Cree XPG			
Colour temperature	2700K / 3000K		5000K	
Drive Current (mA)	350	500	350	500
LED power* (W)	1.2W	1.7W	1.2W	1.7W
CRI (typical)	93	93	75	75
Forward voltage (V) <sub>100</sub>	3.0V	3.2V	3.0V	3.2V
Delivered lumens (L <sub>100</sub> )	72	95	112	147
Lumens per circuit watt**	60	56	93	87
LED lifetime (to 70% lumen maintenance)	50,000hrs at a max ambient temperature of 35°C (if specifying fitting in ambient temperatures of up to 45°C run at 350mA max, LD41-350)			
Materials	Machine finish 316 stainless steel			
Glass	5mm thick borosilicate			
Wiring	Comes pre-wired with 2 core 100mm lead, can be specified with up to 10m at extra cost			
IP rating	IP68 up to 2m depth			

\*LED wattage includes losses associated with using an 85% efficient driver

\*\*data shown allows for an ambient temperature of 35°C


# LD41




Miniature LED Uplight and Wall Light

Data sheet

## Dimensions and Fixing Options

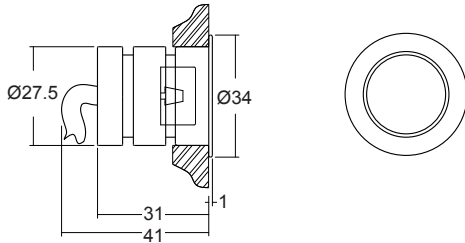


### /480 - O-rings and sleeve

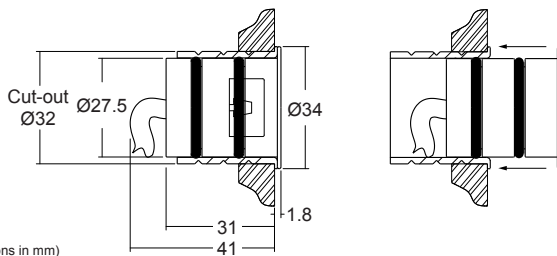

(Dimensions in mm)

### /480GT - Ground tube

The in-ground tube has been designed for applications where a recessed uplighter is required in soil or gravel surfaces. The tube can be buried with the necessary wiring, and then the fitting installed after the landscaping work has been completed. It is supplied with the fixing sleeve bonded into the tube, and can be cut down on site.

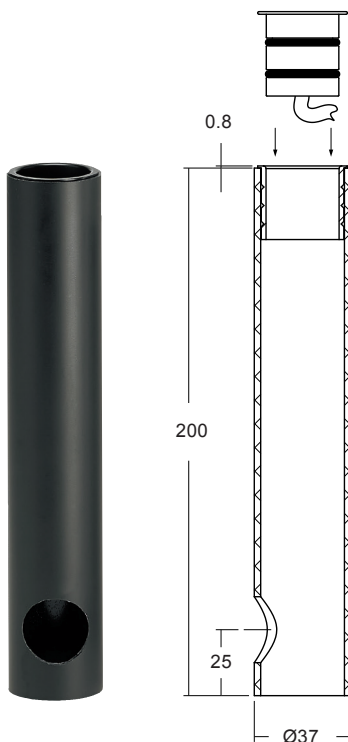

## Photometrics

Photometric files are included in the design pack which can be downloaded from the LD41 product page on the website.

## Order Codes and Options

Product code	LED colour	Lens angle	Finish	Fixing
LD41 - 350 - 500	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Example: LD41-500 / LW30 / MB / Stainless steel / 480

### Product codes with output option

1.2W LED at 350mA	LD41-350
1.7W LED at 500mA	LD41-500

### LED colour options

LED colour options	Suffix
Extra warm white (2700K)	/LW27
Warm white (3000K)	/LW30
Cool white (5000K)	/LW50
Blue	/LB
Green	/LG
Red	/LR
Amber	/LA

### Beam / lens angle options

12° narrow spot	/NB
31° medium	/MB
48° wide	/WB
36° x 12° oval	/OB

### Bezel finish options

Stainless steel 316 (standard)  
 Polished stainless steel (passivate for marine / underwater environments)  
 Paint finish white / black / RAL (see finishes guide for suitable applications)

### Fixing options

First fix sleeve and O-rings	/480
Ground tube	/480GT

### Use with 350mA and 500mA constant current LED drivers

We have a wide range of dimmable LED drivers, 1-10V, DMX, DALI and Mains dimmable. Please see the downloads section on our website:

To run 1-14 LD41-350 in series use a TXDEL350D (0-10V dimmable)

To run 1-14 LD41-500 in series use a TXDEL500D (0-10V dimmable)