

# LED SURFACE-MOUNTED KORA

## Luminaire body


- Metal items, stove-enamelled in titanium colour.
- 1,500 mm suspension cord is included in the standard supply.
- Electrical connector is included in the standard supply.
- Input voltage: 230 V

## Optical system

- Reflector of spun aluminium with external finish in titanium colour.
- Two different sizes of reflectors to choose from depending on type of installation.
- Lower opal diffuser to control the direct glare.


## DIMENSIONS

Measurements in millimeters

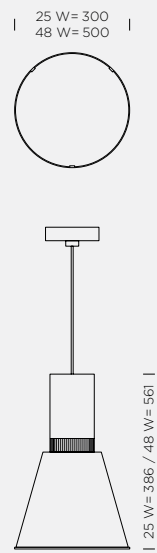

## LUMINAIRES

Lamp	W	Colour Temperature	CRI	Light output	Kg	Reference
<b>KORA • Pendant luminaire. In titanium colour</b>						
LED	25	3,000 K	80	735 lm	3	LLEDS900000031
LED	25	4,200 K	80	815 lm	3	LLEDS90002031
LED	48	3,000 K	80	2,300 lm	6	LLEDS900000033
LED	48	4,200 K	80	2,530 lm	6	LLEDS90002033
LED	48	6,000 K	75	2,780 lm	6	LLEDS90001033

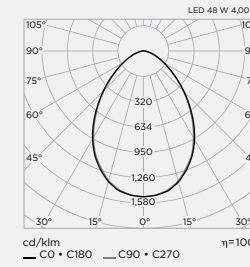

# GREAT COMFORT VISUAL

The KORA series always offers a proper solution according to client needs because it is available in different powers and sizes.

## APPLICATIONS



KORA



Transit areas



Hall



Shopping centers



Supermarkets



Airports

Space  
orientation  
LED

52 lm/W



KORA • LED SURFACE MOUNTED

