


Blazedor PF/BF 2Hr Data Sheet

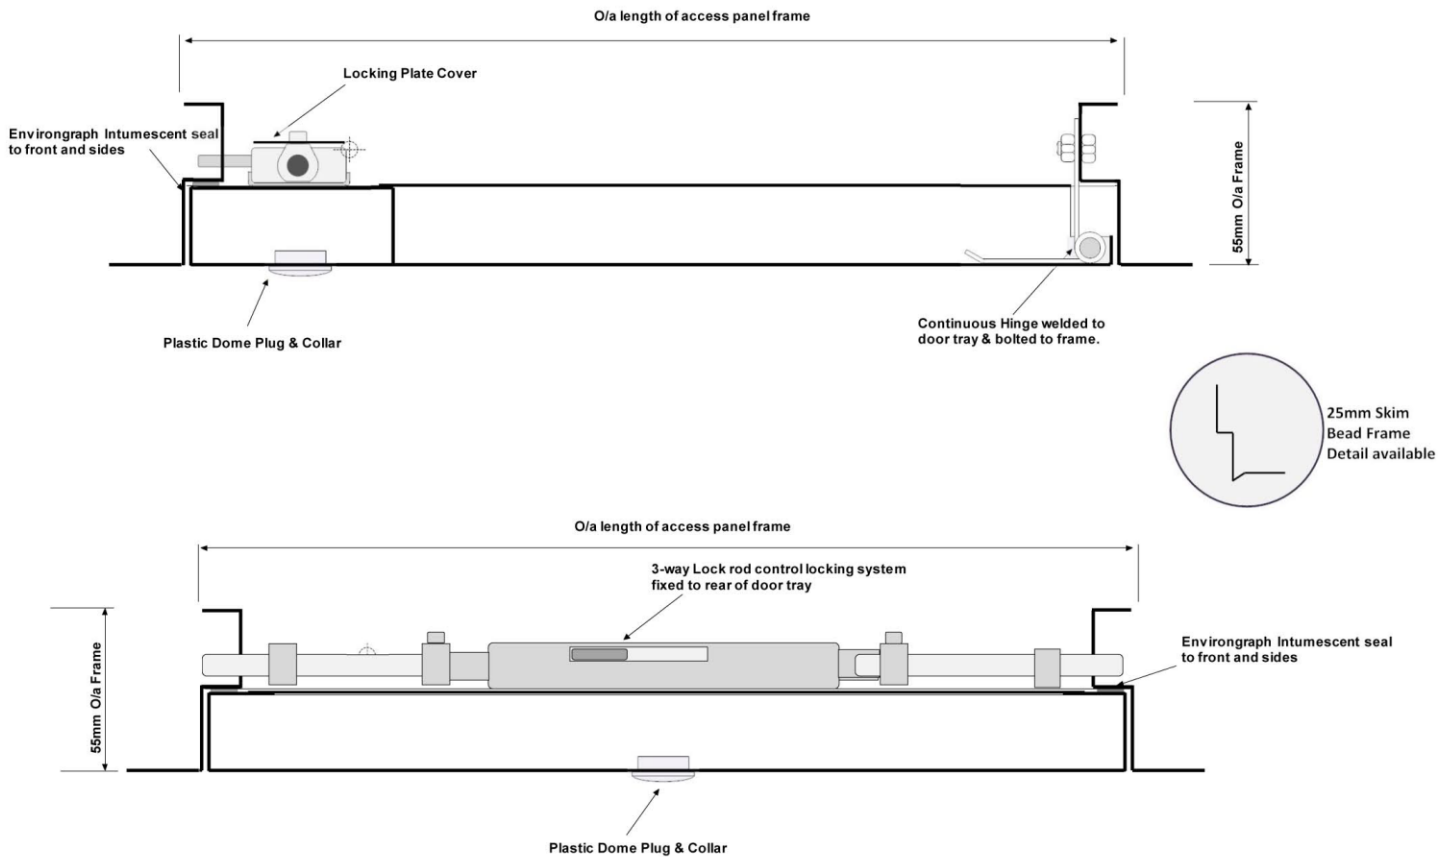

Blazedor PF/BF 2Hr Data Sheet

Description

This 55mm deep access panel has a metal faced door and is supplied with a picture frame surround or a beaded frame for tape and joint. This is a two hour fire rated product tested to standard BS EN 1634-1: 2008 and BS EN 1363-1: 1999. The panel has a continuous hinge welded to the door tray and bolted to the frame. The panel is fitted with 3 way locking as standard and a budget lock, other locking options are available.

Material

Our range of panels are made from 1.2mm Zintec steel for maximum rigidity, other materials are available on request such as stainless steel. As standard our panels are finished in a polyester powder coating - White RAL 9010. For other colours contact our office.

Dimensions

The actual size of the structural opening needs to be 7mm larger than the inside of the frame, ie structural opening for a 0600x0600 would need to be 0607x0607.

Additional Locking Options

The Blazedor is available with additional locking options, 3 point locking (as standard), IP65 airtight anti tamper lock and, Euro profile cylinder lock, and a 5mm tamperproof insert.

